DANA.

Instruction Manual

980439

MODEL 4800 DIGITAL VOLTMETER

Publication
980439

PRELIMINARY MANUAL

MODEL 4800

DIGITAL VOLTMETER

DANA LABORATORIES, INC.
2401 CAMPUS DRIVE
IRVINE, CALIFORNIA 92664

DANA®

TELEPHONE (714) 833-1234
TELETYPE 910-595-1136
TELEX 678-341

January 1971

Warranty

Within one year of purchase, Dana Laboratories will repair or replace, at our option, your instrument if in any way it is defective in material or workmanship. All parts and labor charges will be paid by Dana Laboratories. Just return the instrument to your nearest authorized Dana Service Center freight prepaid. We will return it to you freight prepaid.

DANA

TABLE OF CONTENTS

Section	Title	Page
1	INTRODUCTION	1-1
1.1	General Description	1-1
1.6	Electrical Description	1-3
2	INSTALLATION AND OPERATION	2-1
2.1	Unpacking and Inspection	2-1
2.3	Power Connections	2-1
2.7	Controls	2-2
2.9	Input Connections	2-4
2.13	Operating Instructions	2-5
2.21	BCD Output	2-9
2.24	Data Output	2-9
2.26	Function Output	2-10
2.28	Range Output	2-11
2.30	DVM Command	2-11
2.32	Print Pulse	2-12
2.36	Remote Programming	2-12
3	CALIBRATION	3-1
3.5	Ohms-mV Accessory	3-4
4	DRAWINGS	4-1
4.1	Drawings	4-1

LIST OF ILLUSTRATIONS

Figure	Title	Page
1.2	Block Diagram	1-2
1.3	Simplified Integrator Circuit	1-4
2.1	Power Transformer Taps	2-2
2.2	Basic Measurement Connection	2-6
2.3	Connections Where CM Present	2-6
2.4	Connections for Resistance Measurement	2-7
2.5	DVM Command Pulse	2-11
3.1	Isolator Adjustment Location	3-2
3.2	Digitizer Adjustment Location	3-3
3.3	MV Ohms Accessory	3-5
3.4	Test Point MV Offset	3-6

LIST OF TABLES

Table	Title	Page
1.1	Model 4800 Specifications	1-6
2.1	Front Panel Switches	2-3
2.2	Pin Assignment, Rear Input Connector	2-5
2.3	Printer Output Connector	2-10
2.4	Range Codes	2-11
2.5	Program Input Connector P202	2-13

SECTION 1

INTRODUCTION

1.1 GENERAL DESCRIPTION.

1.2 The Dana Model 4800 Digital Voltmeter is a four-digit instrument with a fifth decade providing 100% overrange on all functions except AC (700V RMS max.) and DC (1000V max.).

1.3 The instrument (with accessories) measures DC volts, DC millivolts, Ohms, AC volts, and ratios. Both manual and automatic ranging are provided. In Autorange, the instrument upranges at 200% of full scale and downranges at 10% of full scale. Polarity selection is automatic and is displayed on the readout.

1.4 Two operating modes are provided. In Single Read mode, a reading is held until a single reading is commanded by a front panel pushbutton switch. That reading is then held until the switch is again activated. In Periodic mode, readings are taken automatically at the rate of three and one-third per second.

1.5 A Program Control switch on the front panel places the instrument under remote control in which all commands are received through the program input connector. A BCD output is provided to an external printer or other output device.

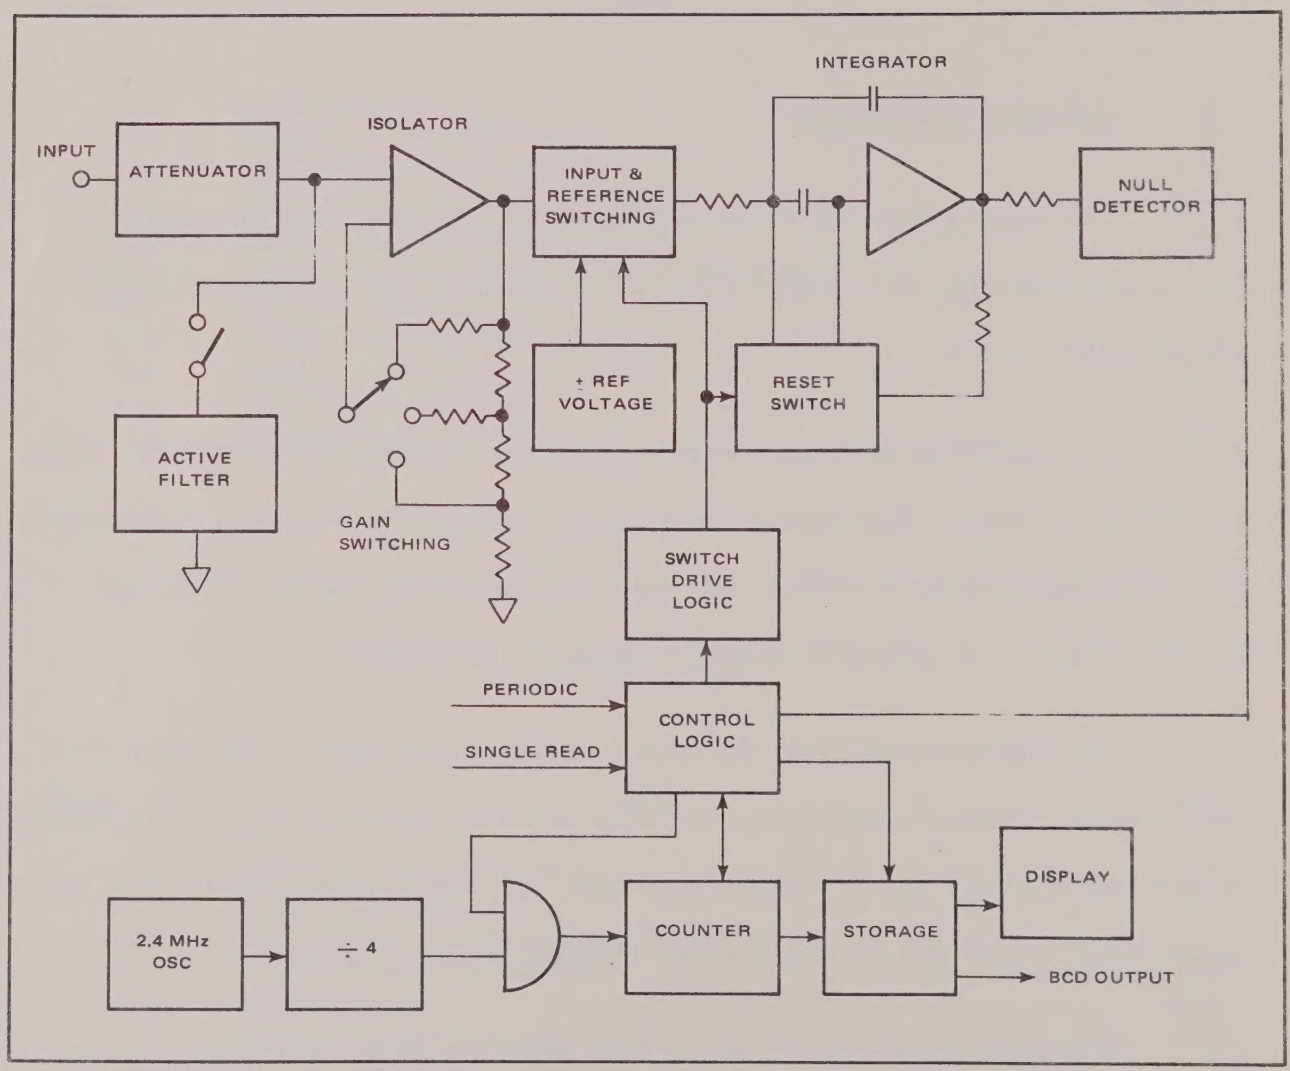

Figure 1.2 Block Diagram

1.6 ELECTRICAL DESCRIPTION.

1.7 A block diagram of the Model 4800 is shown in figure 1.2. A dc input signal is applied through the attenuator (voltage divider) to the Isolator amplifier. Ranging is accomplished by the voltage division of the attenuator combined with the gain of the Isolator. The Isolator output is a ten-volt full scale (20 volts in overrange) analog voltage representing the input.

1.8 For AC measurements, the signal is first applied to the AC Converter where it is scaled, rectified, and filtered. The resulting d-c voltage is then applied to the attenuator and measured as DC.

1.9 To measure resistance, an Ohms Converter is used. The Ohms Converter generates a current that is applied to the unknown resistance. A voltage, representing a ratio ($\frac{E_x}{E_{FS}}$) of the voltage drop across the unknown resistor (E_x) to the voltage drop across a "full-scale" resistor (E_{FS}) is measured as a dc ratio and displayed in ohms.

1.10 The analog output of the Isolator is converted to its digital equivalent by the Integrator using the dual-slope technique. Figure 1.3 shows a simplified Integrator circuit and the dual slope produced.

1.11 I_S and I_R, shown as current generators, represent current derived from the signal (I_S) and the reference current generated within the instrument (I_R). Both constant currents, they are applied to integrator capacitor C_i as the appropriate switch is closed.

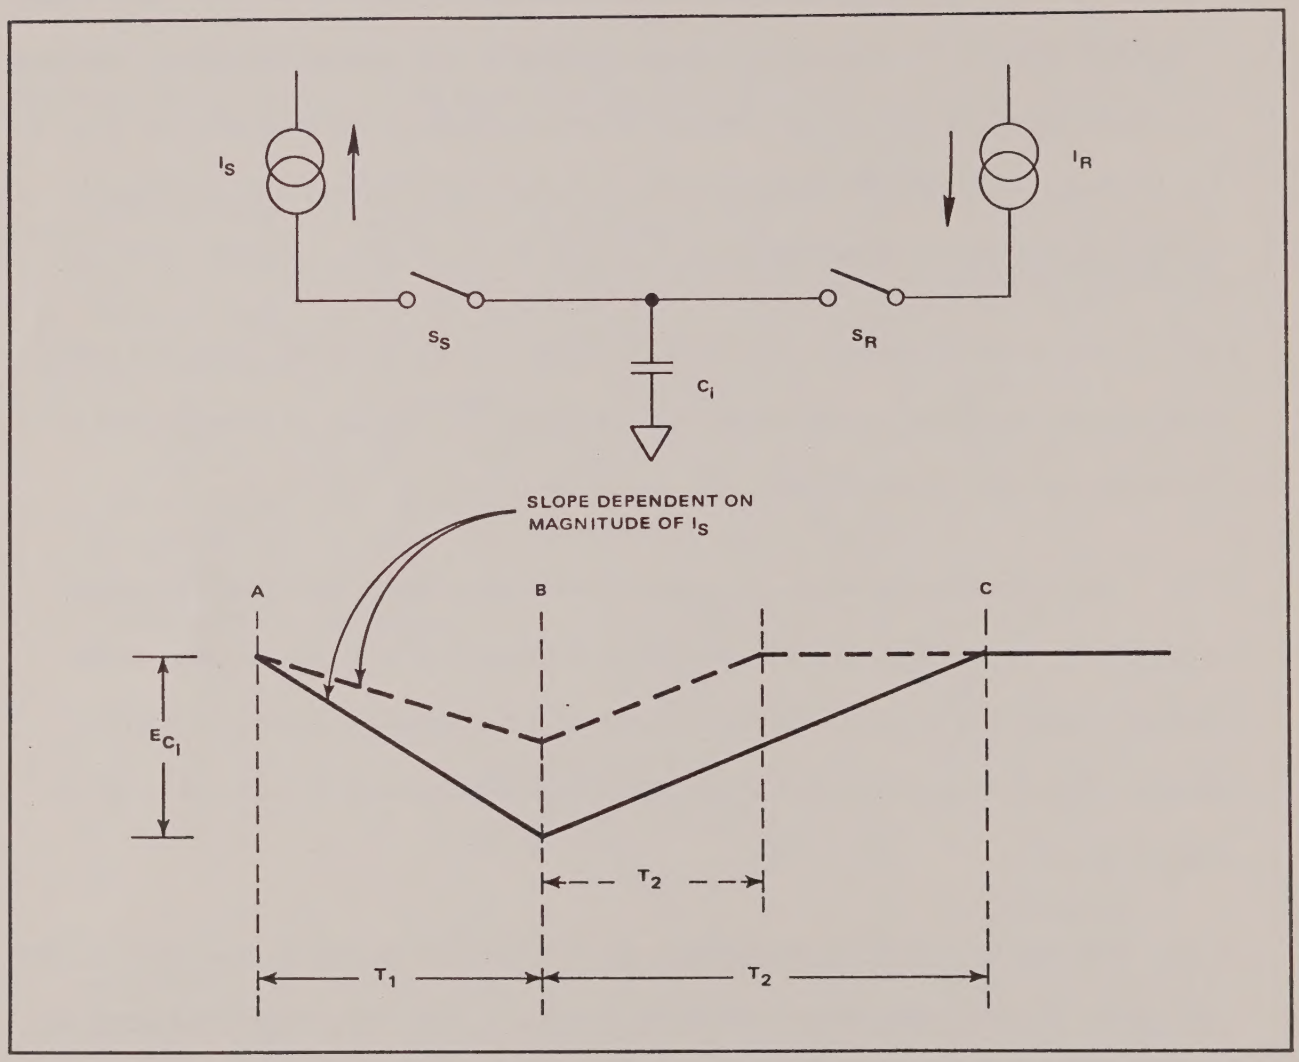

Figure 1.3 - Simplified Integrator Circuit

1.12 Period T1 is the signal integration period. At time A, S_S closes and C_i (initially charged) begins to discharge. T1 is a fixed period. At time B, S_S opens and S_R closes starting the reference integration period (T2). C_i charges at a constant rate. The time required to charge the capacitor to zero is proportional to the voltage across the capacitor at the end of the signal integration period; therefore, it is proportional to the input.

1.13 A counter operates during the integration period at a rate of 600 KHz. The counter output is stored in Storage IC's. The counter is stopped when the reference integration ramp reaches zero by a pulse from the Null Detector. The contents of the Storage circuits are then displayed and routed to the BCD output circuitry.

1.14 The Control Logic (figure 1.2) generates control signals that operate the Integrator switches at the appropriate time.

Table 1.1 - Model 4800 Specifications

GENERAL

Ranging:	Automatic or Manual
Outputs False True	 0V to .5V 2.4V to +5V
Integration Time:	16-2/3 ms
Maximum Common Mode Voltage:	500V guard to case with logic common connected to case; 250V Analog common to guard
Maximum Power Requirement:	115V ± 10%, 50 - 400 Hz, 40 watts 220/240V optional
Operating Temperature:	0° to 50°C
Warmup:	30 minutes to full accuracy
Dimensions:	17 x 3-1/2 x 14 inches
Weight:	16 pounds
Guarantee:	12 months, faulty workmanship or component failure

DC

Full Scale Ranges:	100 mV, 1V, 10V, 100V, 1000V
Resolution:	.01% of range; 10 μV on .1V range

Table 1.1 - Model 4800 Specifications (Continued)

DC (Continued)

Accuracy:	
24 Hours	23°C ± 1°C: ± .005% reading ± .005% f.s.
90 days	23°C ± 5°C: ± .01% reading ± .01% f.s.
Polarity:	Automatic bi-polar
Input Impedance:	Filter Out
.1V range:	>10,000 MΩ
1V range:	>10,000 MΩ
10V range:	>10,000 MΩ
100V range:	10 MΩ
1000V range:	10 MΩ
	Filter In
.1V, 1V, and 10V range:	>10,000 MΩ Shunted by 100 KΩ in series with .3 µF
100V and 1000V range:	10 MΩ ± 1%
Normal Mode Noise Rejection:	Filter Out: 48 dB at every multiple of 60 Hz Filter In: 48 dB at 59 Hz 100 dB at 300 Hz and above
Common Mode Noise Rejection:	
Filter Out, 100Ω unbalance:	140 dB at DC 120 dB, 61 Hz and below plus 48 dB at every multiple of 60 Hz
Filter In, 100Ω unbalance:	140 dB at DC 126 dB, 61 Hz to 100 KHz
Response Time:	Settles to .01% in 5 msec with 10K source
Maximum Voltage Rating (any range):	1000 Volts DC or peak AC

Table 1.1 - Model 4800 Specifications (Continued)

DC/MV

Full Scale Ranges:	10 mV, .1V, 1V, 10V, 100V, 1000V
Resolution:	.01% range; 1 μV on 100 mV range
Accuracy:	
24 Hours, 23°C ± 1°C (after zeroing)	10 mV range: ± .005% reading ± .02% f.s. .1V, 1V, 10V, 100V and 1000V range: ± .005% reading ± .005% f.s.
90 days, 23°C ± 5°C (after zeroing)	10 mV range: ± .01% reading ± .05% f.s. .1V, 1V, 10V, 100V, and 1000V range: ± .01% reading ± .01% f.s.
Polarity:	Automatic Bi-polar
Input Impedance	
Filter Out:	10,000 MΩ all ranges
Filter In:	
10 mV, .1V range:	>10,000 MΩ
1V, 10V range:	>10,000 MΩ shunted by 100KΩ in series with .3 μF
100V, 1000V range:	10 MΩ ± 1%
Normal Mode Noise Rejection:	Same as DC
Common Mode Noise Rejection:	Same as DC
Response Time:	Same as DC
Maximum Voltage:	
10 mV, .1V range:	150V DC or RMS
1V, 10V, 100V, 1000V range:	1000V DC or peak AC

Table 1.1 - Model 4800 Specifications (Continued)

RATIO

Full Scale Ranges:	Same as selected function
Polarity:	Automatic Bi-polar
Reference Voltage Polarity:	Positive only
Reference Voltage Range:	DC, AC, DC/MV: + 1V to 10.5V Ohms: +9V to 10.5V
Maximum Function Voltage:	Same as Function
Reference Input Impedance:	100 Megohms
Reference Normal Mode Rejection:	15 dB at 60 Hz increasing a 6 dB/octave to 100 dB at 1 MHz
Reference Input Bias Current:	250 na
Reference Settling Time: (to .01%)	.25 sec
Accuracy:	
24 Hours, 23°C ± 1°C	DC and MV/DC all ranges but 10 mV: (± .005% reading ± .005% f.s.) x $(\frac{10V}{Ref})$ 10 mV range: (± .005% reading ± .01% f.s.) x $(\frac{10}{Ref})$ Ohms: 1 Ω range: (± .005% reading ± .02% f.s.) x $(\frac{10V}{Ref})$ 10 Ω to 10 MΩ range: (± .005% reading ± .005% f.s.) x $(\frac{10V}{Ref})$ 10 MΩ range: (± .01% reading ± .01% f.s.) x $(\frac{10V}{Ref})$

Table 1.1 - Model 4800 Specifications (Continued)

KILOHMS

Full Scale Ranges:	1Ω , 10Ω , .1 KΩ , 1 KΩ , 10 KΩ , 100 KΩ , 1000 KΩ , 10 MΩ , 100 MΩ
Type:	4 wire
Accuracy:	
24 Hours, 23°C ± 1°C	1Ω range: ± .005% reading ± .02% f.s. 10Ω to 10 MΩ range: ± .005% reading ± .005% f.s. 100 MΩ range: ± .01% reading ± .01% f.s.
90 days, 23°C ± 5°C	1Ω range: ± .01% reading ± .05% f.s. 10Ω to 1 MΩ range: ± .01% reading ± .01% f.s. 10 MΩ range: ± .05% reading ± .01% f.s. 100 MΩ range: ± .2% reading ± .01% f.s.
Response Time:	1Ω to 10 MΩ 20 msec 100 MΩ : 200 msec
Current Through Unknown:	
1Ω , 10Ω range	10.1 ma
100Ω range	1.01 ma
1 kilohm range	.101 ma
10 kilohm range	1 ma
100 kilohm range	.1 ma
1 megohm range	.01 ma
10 MΩ range	1 µa
100 MΩ range	.1 µa
Fault Voltage:	30V peak AC or DC on any range

Table 1.1 - Model 4800 Specifications (Continued)

AC

Full Scale Ranges:	.1V, 1V, 10V, 100V, 1000V
Type:	Distortion Insensitive (DIAC) Converter
Resolution:	.01% of range
Maximum Input Voltage:	750V RMS to 20 KHz, decreasing linearly to 20V at 1 MHz; Frequency X E_{in} < 2×10^7 volt-Hz
Settling Time: (to .1% of final value)	350 msec
Input Impedance Front Input terminals (+IN to -IN Terminal):	1 megohm (±.1%) in series with .22 µF capacitor, shunted by less than 100 pF to common
Common Mode Rejection: DC to 60 Hz (100 Ω Source)	
.1V range	120 dB
1V range	120 dB
10V range	100 dB
100V range	80 dB
1000V range	60 dB (CMR is referred to Input full scale)
Temperature Coefficient: (Sine wave input)	
30 Hz to 100 KHz	
.1V range	± .004% rdg ± .010% f.s./°C
1V, 10V, 100V, 1000V range	± .003% rdg ± .002% f.s./°C
100 KHz to 1 MHz	
.1V, 1V, 10V, 100V, 1000V range	± .01% rdg ± .01% f.s./°C

Table 1.1 - Model 4800 Specifications (Continued)

AC (Continued)

Accuracy:	
24 Hours, 23°C ± 1°C .002V < E_{IN} < 500V Sine Wave Input (after offset adjust)	
30 Hz to 50 Hz	.1V range: ± .10% reading ± .08% f.s. 1V, 10V, 100V, 1000V range: ± .10% reading ± .01% f.s.
50 Hz to 20 KHz	.1V range: ± .02% reading ± .08% f.s. 1V, 10V, 100V, 1000V range: ± .02% reading ± .01% f.s.
20 KHz to 100 KHz	.1V range: ± .03% reading ± .10% f.s. 1V, 10V, 100V, 1000V range: ± .03% reading ± .02% f.s.
100 KHz to 300 KHz	.1V range: ± .25% reading ± .25% f.s. 1V, 10V, 100V, 1000V range: ± .25% reading ± .07% f.s.
300 KHz to 1 MHz	.1V range: ± .5% reading ± .5% f.s. 1V, 10V, 100V, 1000V range: ± .5% reading ± .1% f.s.
90 days, 23°C ± 5°C	.1V range: Add ± .03% reading ± .03% f.s. to 24 Hour specification 1V, 10V, 100V, 1000V range: Add ± .01% reading ± .01% f.s. to 24 Hour specification

Table 1.1 - Model 4800 Specifications (Continued)

AC (Continued)

6 months, 23°C ± 5°C	.1V range: Add ± .04% reading ± .03% f.s. to 24 Hour specification 1V, 10V, 100V, 1000V range: Add ± .02% reading ± .01% f.s. to 24 Hour specification
Shunt Capacitance: Rear Input Option (+IN to -IN Terminal)	120 pF

SPECIAL NOTE

The shipping carton and its internal support structure have been scientifically designed for maximum protection of the instrument. Dana recommends saving the carton and contents for use in future reshipping of the instrument. Alternate packing methods, such as plastic foam blocks and loose packing material, may prove to be insufficient for maximum protection and result in damage during shipment.

If reshipping is required and the original carton is not available, special packing instructions can be obtained from Dana Labs' Product Service Department.

SECTION 2

INSTALLATION & OPERATION

2.1 UNPACKING AND INSPECTION.

2.2 The Model 4800 DVM is secured in four molded, plastic-foam forms and packaged in a double-walled cardboard carton for shipment. The plastic forms hold the DVM securely in the carton and absorb any reasonable external shock normally encountered in transit. Prior to unpacking, examine the exterior of the shipping carton for any signs of damage. Carefully remove the DVM from the carton and inspect the exterior of the instrument for any signs of damage. If damage is found, notify the carrier immediately.

2.3 POWER CONNECTIONS.

2.4 A standard, eight-foot, three-wire power cable is supplied with the instrument. It connects to the POWER connector on the rear panel.

2.5 A .5 amp line fuse is mounted on the rear panel of the instrument.

2.6 Instruments for export, designated as 4800E, are equipped with a special transformer and jumper matrix, allowing the user to adapt the instrument for operation on various line voltages. In figure 2.1 is shown the proper jumper placement on the power matrix board for each line voltage. The matrix board assembly is mounted directly to the power transformer.

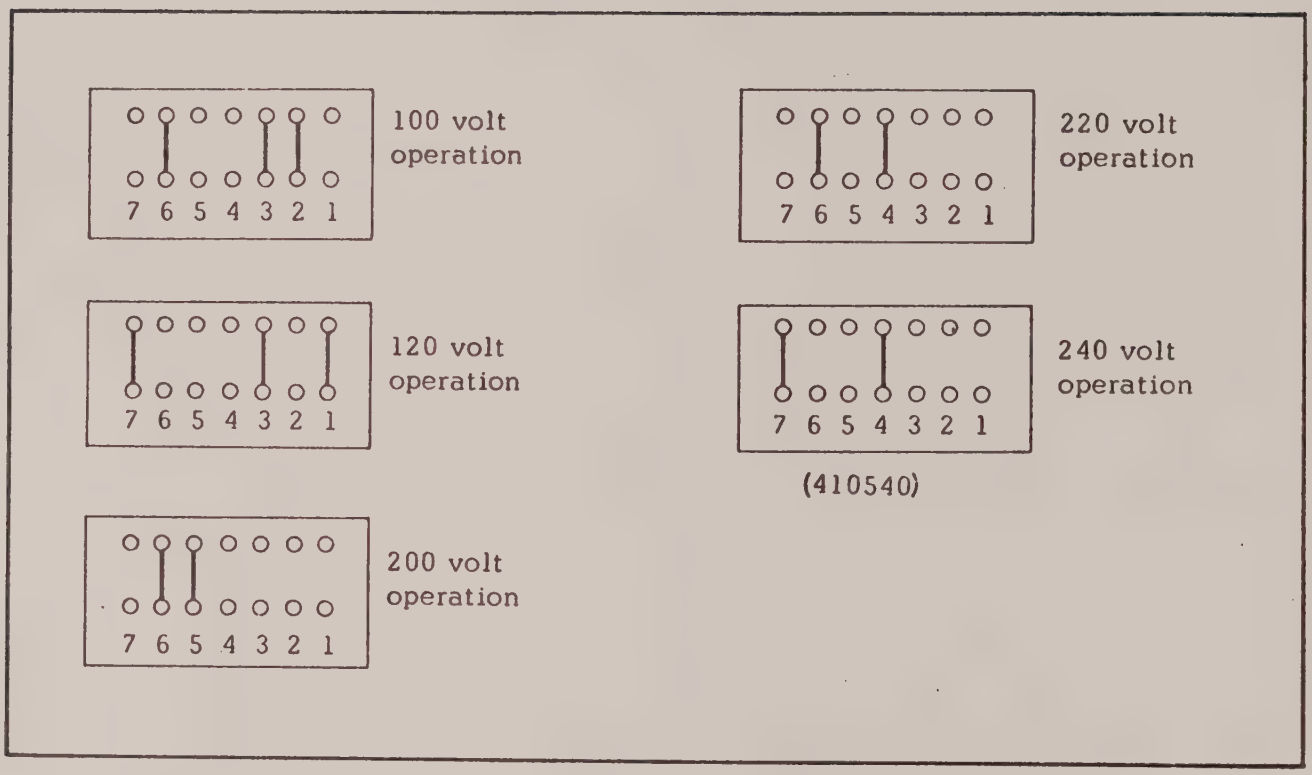
100 volt operation
7 6 5 4 3 2 1
220 volt operation
7 6 5 4 3 2 1
120 volt operation
7 6 5 4 3 2 1
240 volt operation
7 6 5 4 3 2 1
(410540)
200 volt operation
7 6 5 4 3 2 1

Figure 2.1 - Power Transformer Taps

2.7 CONTROLS.

2.8 The POWER switch, on the front panel, applies power to the instrument when ON. The OFF position removes power from all portions of the instrument. Other controls are described in table 2.1.

Table 2.1 - Front Panel Switches

Switch	Position	Function
Function Select (rotary switch)	AC	Selects the measurement of AC voltages on the .1, 1, 10, 100, and 1000 volt ranges (max. input, 700V RMS)
	DC	Selects the measurement of DC voltages on the .1, 1, 10, 100, and 1000 volt ranges (max. input, 1000V)
	mV - DC	Selects the measurement of DC voltages on the 10 mV range plus the five d-c ranges (above)
	Ω - MΩ	Selects the measurement of resistance on the 1 and 10 ohm ranges; on the .1, 1, 10, 100, and 1000 Kilohms ranges; or on the 10 or 100 Megohm ranges
Range Select (rotary switch)	AUTO	Selects Auto Range in which the optimum range is selected automatically by internal circuits. Uprange occurs at 200% of full scale; Downrange occurs at 10% of full scale
	Other Positions	Enables manual selection of fixed ranges. Ranges permissible for each function are inscribed on the panel
DATA OUTPUT (pushbutton)	Depressed	Enables the print pulse causing BCD data at P202 to be recorded by printer, or other output device. (Output data is present at P202 regardless of the position of this switch.)
PROGRAM CONTROL (pushbutton)	Depressed	Enables the selection of range, function, and mode to be made externally through the remote programming connector
PERIODIC (pushbutton)	Depressed	Selects the Periodic mode of operation in which the instrument automatically takes readings at the rate of 3-1/3 per second (approx.)

Table 2.1 - Front Panel Switches (Continued)

Switch	Position	Function
HOLD (pushbutton)	Depressed	Selects the HOLD mode in which each reading is held until a new reading is commanded by depression of the SINGLE switch or by an external read command
SINGLE (momentary-contact pushbutton)	Depressed	Commands a new reading to be taken in HOLD mode. Only one reading is taken and held until SINGLE is again depressed (NOTE: DVM will not Auto Range in Single Read mode.)
RATIO (pushbutton)	Depressed	Selects a ratio measurement in which the readout represents the ratio of the input to an external reference voltage (applied at terminals on the rear panel) multiplied by 10: $\frac{E_{in}}{E_{Ref}} \times 10$
FILTER (pushbutton)	Depressed	Adds an active three-pole filter across the input circuit when measuring any function but AC. In AC mode, filter is switched in automatically
FRONT/REAR (slide switch on Model 4800-1 only)	Front	Selects signal at front set of input terminals for measurement
	Rear	Selects signal at rear set of input terminals for measurement

2.9 INPUT CONNECTIONS.

2.10 Signal input binding posts are located on the front panel of the instrument. Connections to these terminals are made with standard "banana" plugs on the input cable. Instruments designated as 4800-1 are equipped with a duplicate set of input terminals on the rear panel. The input may be connected to either set of terminals. Pin assignment of the rear input connector is shown in table 2.2.

Table 2.2 - Pin Assignment, Rear Input Connector*

Pin	Function
2	Guard
3	- Input
4	- Current
6	+ Current
7	+ Input
Connector: Viking TKR7-101 (Dana 600673)	
Mating Connector: Viking TKP7-100 (Dana 600616)	

2.11 EXT REF terminals (binding posts) on the rear panel are the inputs for an external reference voltage used in ratio measurements.

2.12 ANALOG OUTPUT terminals (binding posts) on the rear panel deliver a scaled and buffered 0 to ± 20V dc (including overrange) voltage equivalent of the readout. This output can be used to drive a recorder or as an accurate (.02%) voltage source. Output current is 1 ma, maximum.

2.13 OPERATING INSTRUCTIONS.

2.14 For basic DC, mV, or AC measurement, a single-conductor shielded cable is used for interconnection between the signal source and the DVM. The conductor carries the high side of the signal and connects to the + INPUT terminal. The shield connects to the - INPUT terminal which is strapped to GUARD. (See figure 2.2.)

*NOTE: To remove the mating connector from the rear input, grasp the connector with a finger on each of the two knurled areas of the connector (top and bottom). Squeeze firmly to release lock and pull.

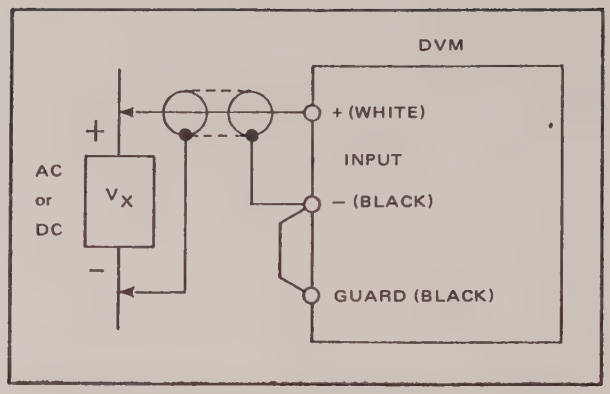

Figure 2.2 - Basic Measurement Connection

2.15 Where common-mode signals are present, a two-conductor shielded cable is required. Connections are made as shown in figure 2.3. The signal input terminals are isolated from the digital section and from power ground.

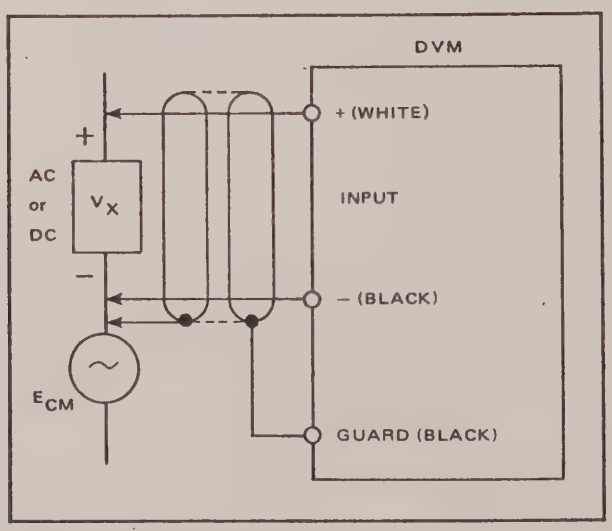

Figure 2.3 - Connections Where CM Present

2.16 For Resistance measurement, connect leads to the unknown resistance as shown in figure 2.4.

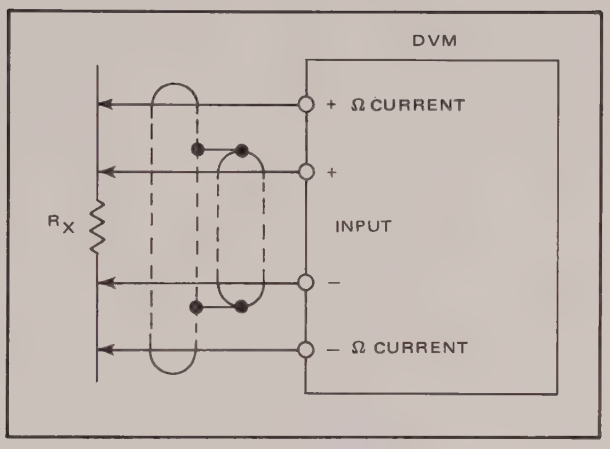

Figure 2.4 - Connections for Resistance Measurement

2.17 Ratio measurements are made by applying a positive d-c voltage to the reference input terminals on the rear panel and an input signal of any function at the front input terminals. For DC/DC, DC-MV/DC, or AC/DC ratios, the reference voltage must be within the range of +.5V to +10.5V. For Ω/DC ratio, the reference voltage must be within +9V to +10.5V. Input voltage limitations (numerator) are the same as those given for conventional measurement of the particular function. The readout is the ratio multiplied by ten: $E_{input}/E_{reference} \times 10$.

2.18 The - INPUT terminal is internally connected to the - REF input terminal.

2.19 Once the instrument has been connected to the power line and to the signal source in accordance with the instructions, the operator can make all required measurements by setting controls as described in table 2.1.

CAUTION

Do not exceed the following maximum inputs:

DC	1000 VDC or peak AC
DC/mV	On 10 mV and .1 volt range: 150 VDC or RMS AC On 1V, 10V, 100V, and 1000V ranges: 1000 VDC or peak AC
AC	750V RMS to 20 KHz decreasing to 200V RMS at 100 KHz
RATIO	input: same as function selected reference: +10.5V
OHMS	With + OHMS CURRENT terminal connected to + INPUT: 1Ω to 10KΩ ranges: -30V/+150V DC or peak AC 100KΩ to 100MΩ ranges: ± 150V DC or RMS AC with + OHMS CURRENT terminal floating (from input): ± 150V DC or RMS AC

2.20 The DVM has 100% overrange capability in all functions except the 1000 range on AC and DC. Maximum AC input is 750V RMS; maximum DC input is 1000 volts. On any range, an overrange condition is indicated by the maximum readout of 20000 and illumination of the NO indicator on the readout. The NO indicator also lights if a function or range is selected for which the DVM is not equipped.

SPECIAL NOTE

PRINTER OUTPUT AND REMOTE PROGRAM CONNECTORS.

On some instruments, the output and program connectors are not keyed; it is possible to connect them improperly. For proper orientation of the connectors, install mating connectors as described below.

Printer Output (J201). Mating connector must be installed so that pin 44 mates with the upper right-hand pin of P201 (when viewing the DVM from the rear).

Remote Program (J202). Mating connector must be installed so that pin 30 mates with the upper right-hand pin of P202 (when viewing the DVM from the rear).

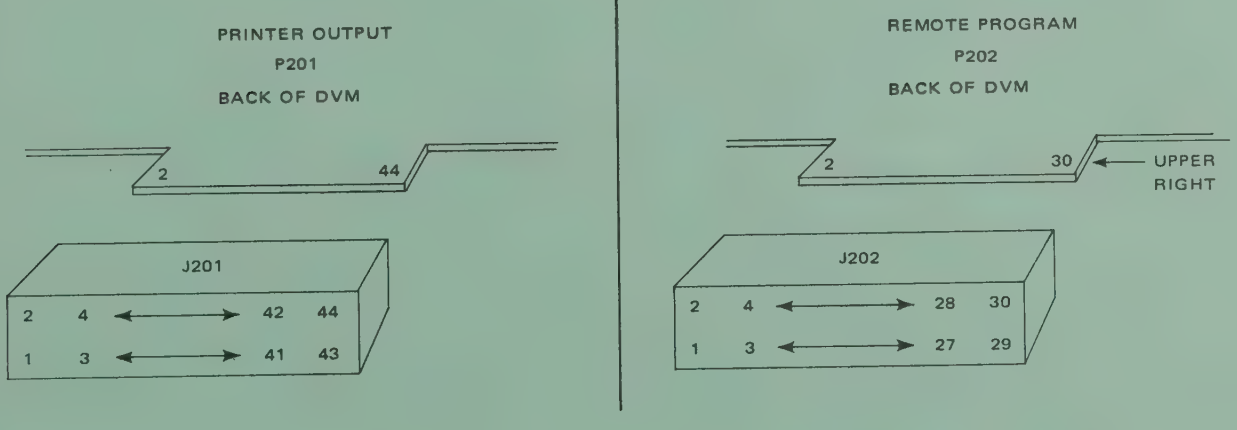

2.21 BCD OUTPUT.

2.22 Output data is delivered to the Printer Output Connector P201 in 8-4-2-1 BCD code at standard TTL logic levels:

False = 0V to +.5V

True = +2.4V to +5V

Maximum "fanout" = 2

Maximum Capacitive Load = 500 pF

2.23 All outputs are referenced to data output ground (pin 22). This ground may be floated at up to 200V (peak) from power ground. Table 2.3 lists the pin assignments of P201. The connector is double-edged.

> CAUTION
>
> True output lines are not short-circuit proof. Accidental grounding may damage the output circuitry.

2.24 DATA OUTPUT.

2.25 Data output is delivered on 18 lines in positive true format. Table 2.3 identifies each output by decade and BCD weight (pins 29 - 44). Polarity is indicated on pins 28 (-) and 26 (+) in positive true levels. Pin 27, $10K_1$, is true to indicate a "1" in the most-significant digit (10K); pin 25, $10K_2$, is true to indicate a "2".

2.26 FUNCTION OUTPUT.

2.27 Function outputs appear in negative true format on six pins: $\overline{\text{DC/MV}}$ (pin 19), $\overline{\text{Ratio}}$ (pin 17), $\overline{\text{Filter}}$ (pin 15), $\overline{\text{DC}}$ (pin 13), $\overline{\text{Ohms}}$ (pin 11), and $\overline{\text{AC}}$ (pin 9).

Table 2.3 - Printer Output Connector

	PIN		
10_1	44	43	$1K_1$
10_8	42	41	$1K_8$
10_2	40	39	$1K_2$
10_4	38	37	$1K_4$
1_1	36	35	100_1
1_8	34	33	100_8
1_2	32	31	100_2
1_4	30	29	100_4
- Polarity	28	27	$10K_1$
+ Polarity	26	25	$10K_2$
$\overline{\text{DVM Command}}$	24	23	PRINT
Ground	22	21	NO
$\overline{\text{Hold}}$	20	19	$\overline{\text{DC/MV}}$
+5V	18	17	$\overline{\text{Ratio}}$
B_0	16	15	$\overline{\text{Filter}}$
A_0	14	13	$\overline{\text{DC}}$
C_0	12	11	$\overline{\Omega}$
D_0	10	9	$\overline{\text{AC}}$
	8	7	
	6	5	
	4	3	
	2	1	
Connector Type: Cinch 50-44C-10			

2.28 RANGE OUTPUT.

2.29 Range identification is given in four-line BCD code in positive true format according to table 2.4.

Table 2.4 - Range Codes

Range	A (pin 14)	B (pin 16)	C (pin 12)	D (pin 10)	BCD
1 Ω	1	0	0	0	1
10 Ω , 10 mV	0	1	0	0	2
.1 KΩ , .1V	1	1	0	0	3
1 KΩ , 1V	0	0	1	0	4
10 KΩ , 10V	1	0	1	0	5
100 KΩ , 100V	0	1	1	0	6
1000 KΩ , 1000V	1	1	1	0	7
10 MΩ	0	0	0	1	8
100 MΩ	1	0	0	1	9

2.30 DVM COMMAND.

2.31 In the absence of the Programming option, DVM Command (pin 24) is used to command a reading. The command is automatically delayed 5 msec ± 20% to allow for input settling time and digitizer reset. The command occurs on the positive TTL transition. Specifications for command pulse are shown in figure 2.5.

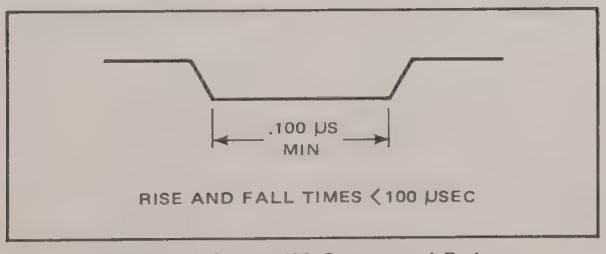

Figure 2.5 - DVM Command Pulse

2.32 PRINT PULSE.

2.33 The Print pulse (pin 23) remains true during the signal and reference integration periods plus the overrange period, if any. It drops to false to indicate to the printer that the reading is complete and can be printed.

2.34 "NO" Indication.

2.35 The "NO" line (pin 21) duplicates the "NO" indicator on the readout. An overrange condition is indicated by a true "NO" line and data output of 20000. The line is also true if a function or range is selected for which the instrument is not equipped.

2.36 REMOTE PROGRAMMING.

2.37 The DVM receives commands through program input connector J202 on the rear panel. Pin assignments of P202 are listed in table 2.5. Commands are made by a switch closure from the selected command to ground (pin 25) or by standard TTL logic levels (0 to .4V, false; +2.4 to +5.0V, true) with respect to ground.

2.38 Function Programming. Function is selected by applying a ground or false logic level to the appropriate pin:

DC	pin 14
DC/MV	pin 19
AC	pin 26
OHMS	pin 24
RATIO	pin 22
FILTER	pin 20

NOTE: When programming $\overline{\text{AC}}$ function and AUTORANGE, FILTER-pin 20, must also be selected to obtain proper timeout. This is not necessary when a fixed range is programmed.

2.39 Range Programming. The range, except for Autorange, is programmed by applying a positive true BCD code to the four range lines (pins 12, 15, 17, and 18) according to the following table. Autorange is selected by a ground or false logic level applied to pin 16.

Range	Range A pin 12	Range B pin 18	Range C pin 15	Range D pin 17
1 ohm	1	0	0	0
10 ohms, 10 mV	0	1	0	0
.1 Kilohm, .1V	1	1	0	0
1 Kilohm, 1V	0	0	1	0
10 Kilohm, 10V	1	0	1	0
100 Kilohms, 100V	0	1	1	0
1 Megohm, 1000V	1	1	1	0
10 Megohms	0	0	0	1
100 Megohms	1	0	0	1

Table 2.5 - Program Input Connector P202

	PIN		
Remote (Output Flag)	30	29	$\overline{\text{Ext DVM Command (FAST)}}$
$\overline{\text{Ext Hold}}$	28	27	$\overline{\text{Ext DVM Command (Timeout)}}$
$\overline{\text{Ext AC}}$	26	25	Ground
$\overline{\text{Ext } \Omega}$	24	23	+5 Volt
$\overline{\text{Ext Ratio}}$	22	21	$\overline{\text{Ext Program Control}}$
$\overline{\text{Ext Filter}}$	20	19	$\overline{\text{Ext DC/MV}}$
Ext B in	18	17	Ext D in
Ext $\overline{\text{AUTO}}$	16	15	Ext C in
Ext $\overline{\text{DC}}$	14	13	
Ext A in	12	11	

(Continued)

Table 2.5 - Program Input Connector P202 (Continued)

	PIN		
Not Used	10	9	Not Used
Not Used	8	7	Not Used
Not Used	6	5	Not Used
Not Used	4	3	Not Used
Not Used	2	1	Not Used
Connector Type: Cinch 50-30C-10			

2.40 $\overline{\text{Ext Program Control}}$. A contact closure to ground or a false logic level to pin 21, $\overline{\text{Ext Program Control}}$, disables all front panel controls. Operation of the DVM is then under control of the remote program input.

2.41 Remote (Output Flag). Remote (Output Flag), pin 30, is an output line that remains at true logic level while the DVM is under remote control.

2.42 +5 Volts. A voltage of 5 volts $\pm$ 5% from the logic power supply is available for systems use. Current output is .1 amp, maximum.

2.43 Read Commands. Either of two read command lines can be selected by a contact closure to ground or by a negative logic level transition. Pin 29, Fast Command, starts a new measurement after a 5 msecond reset delay. Pin 27, Timeout Command, starts a new measurement after a Timeout delay to allow for settling time of the measured signal (in addition to the 5 msec basic delay). Timeouts for the various functions are listed in the following table. In Autorange, the indicated delays are taken following each range change.

Function	Timeout
DC	30 msec
1 ohm to 10 Megohm	300 msec
100 Megohm	300 msec
Filter	250 msec (plus function timeout)
AC*	500 msec

*See note on page 2-12.

SECTION 3

CALIBRATION

3.1 EQUIPMENT REQUIRED.

a. Precision DC Voltage Standard (Fluke 332A or equivalent)

b. AC Lab Power Source (Optimation AC 104 or equivalent)

c. Microvoltmeter (Fluke 745A or equivalent)

d. Standard Resistors:

100 MΩ
19 MΩ
1.9 MΩ
190 KΩ
19 KΩ
1.9 KΩ
190Ω
19Ω
1.9Ω

NOTE: All adjustment locations are shown in figure 3.2.

3.2 Isolator Voltage Zero (Figure 3.1).

a. Set RANGE to .1; FUNCTION to DC; FILTER out.

b. Short point (1) to ground (front panel - INPUT terminal).

c. Connect microvoltmeter across point (1) and point (2) .

d. Adjust R36 (figure 3.5) for a voltage of less than 10 µvolts on the microvoltmeter. Remove microvoltmeter.

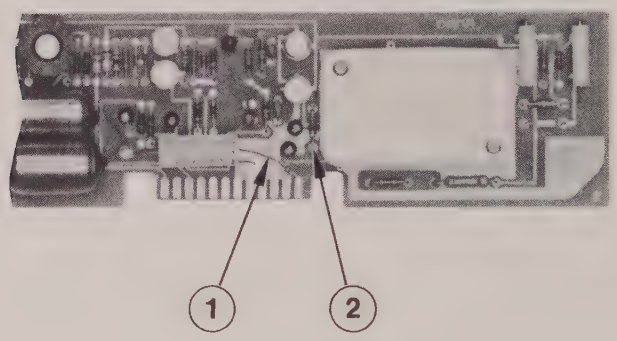

Figure 3.1 - Test Points - Isolator Voltage Zero

3.3 Isolator Current Zero.

a. Connect microvoltmeter across ANALOG OUTPUT terminals on rear panel (Isolator output).

b. Adjust front panel OFFSET (DC) for 0 ± 100 µvolts reading on microvoltmeter.

c. Remove short from point (1) to ground; place FILTER in.

d. Insert 1 Megohm resistor across input terminals.

e. Adjust R12 for output voltage on microvoltmeter of less than ± 100 µvolts.

3.4 DC Gain Adjustment (Digitizer PCB)

a. Set RANGE to AUTO; FUNCTION to DC; depress RATIO.

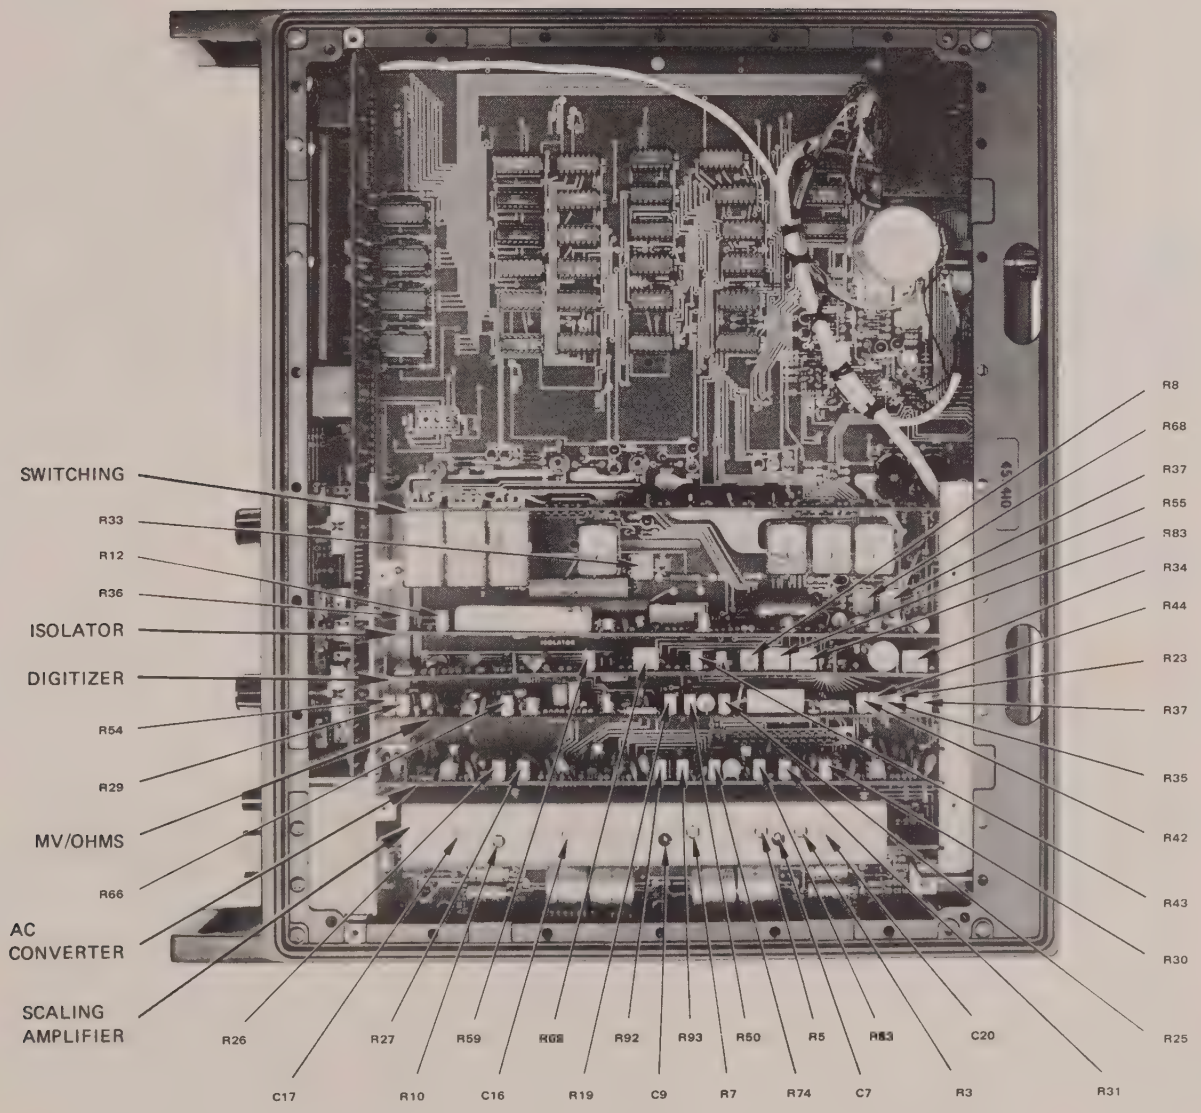

Figure 3.2 - Adjustment Locations

b. Apply inputs to DVM and make indicated adjustments on Digitizer board as listed in the following table.

SIGNAL INPUT	REF. INPUT	MODE	ADJUST: (Figure 3.2)	For Readout of:
-1.90000V	+1.00000	DC/DC	R55	-19.000V
+1.90000V	+1.00000	DC/DC	R68	+19.000V
-19.0000V	+10.0000	DC/DC	verify readout of -19.000V ± 1 digit	
-19.0000V	-	DC*	R43	-19.000V ± 1 digit
+19.0000V	-	DC	R59	+19.000V ± 1 digit

*Switch from RATIO to DC measurement

3.5 Range Calibration. (Main Interconnection PCB)

a. Set FUNCTION to DC; RANGE to AUTO.

b. Apply inputs to DVM and perform the indicated adjustment as listed in following table.

INPUT	ADJUST:	For Readout of:
± .190005	R68 (.1/1KV)	± .19001V
± 1.90005	R37 (1V)	± 1.9001V
± 190.005	R33 (100V)	± 190.01V
± 1000.00	verify readout	± 1000.0V ± .5 digit

3.6 OHMS-MV ACCESSORY.

3.7 Voltage Zero.

a. Short the + and - front input terminals with a copper clip lead.

b. Select DC/MV FUNCTION; 10 MV RANGE; FILTER in.

c. Remove top cover from instrument. Connect microvoltmeter between point (1) (figure 3.3) and ground (- INPUT terminal on front panel).

d. Adjust MV OFFSET on front panel for zero reading on microvoltmeter.

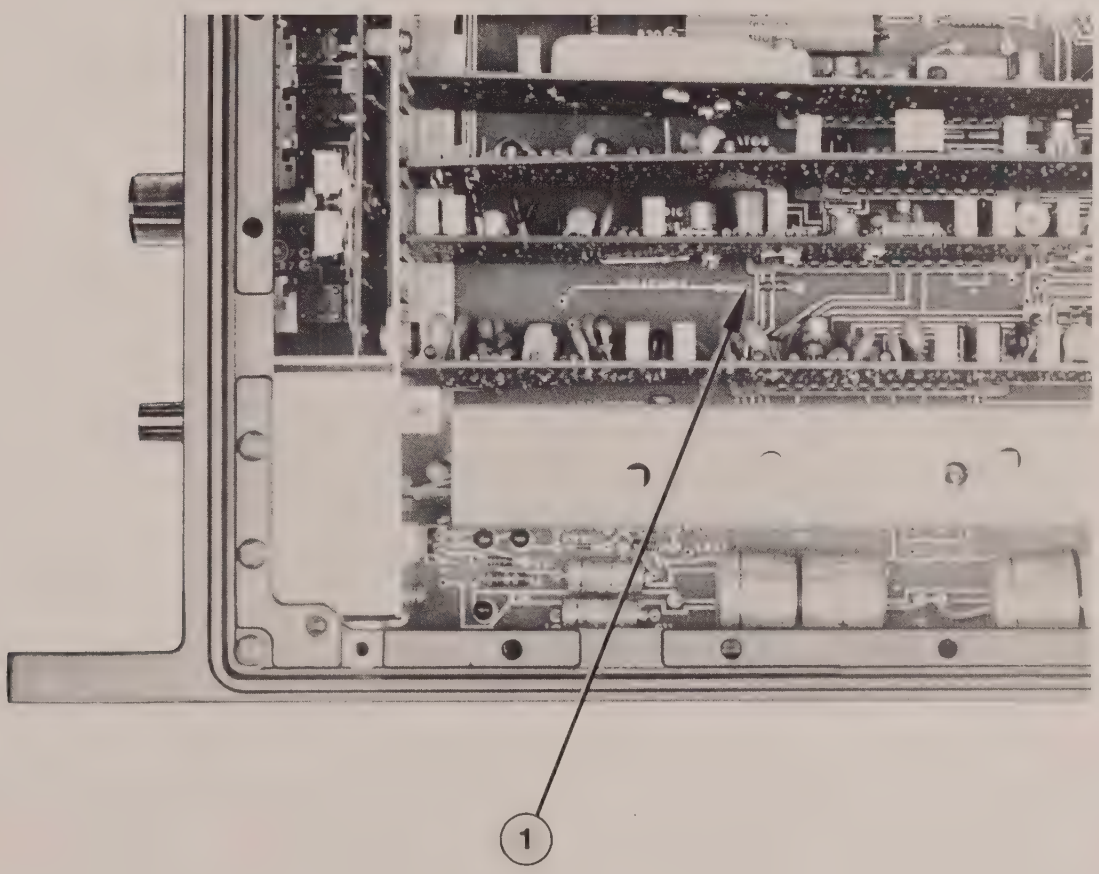

Figure 3.3 - Test Point - MV Offset

3.8 Current Zero.

a. With input still shorted, adjust R66 for 00000 readout ± 1 digit.

b. Remove short across input. Replace clip lead with a 100 Kilohm resistor across input terminals.

c. Adjust R54 for 00000 readout ± 2 digits.

d. Remove 100 Kilohm resistor.

3.9 Gain Adjustment.

a. Set RANGE to 100 MV. Apply +190 MV across input terminals. Adjust R29 for readout of 190.00 MV ± 1 digit.

b. Reverse polarity of input to -190 mV. Check for readout of -190.00 MV ± 1 digit. Readjust R29 as necessary.

3.10 Ohms Calibration.

a. Select MEGOHM function; 100 RANGE. Short the + INPUT, - INPUT, + OHMS CURRENT, and - OHMS CURRENT terminals together.

b. Connect microvoltmeter from + INPUT terminal (+ lead) to - ANALOG OUTPUT terminal on rear panel.

c. Adjust R19 for reading of zero ± 50 μvolts on microvoltmeter. Remove shorts from input terminals.

d. Short the + INPUT and + OHMS CURRENT terminals together; short the - INPUT and - OHMS CURRENT terminals together (two-wire measurement configuration).

e. Select 100 Megohm range; connect input leads to a 100 Megohm standard resistor. Adjust R50 for readout of 100.00 Megohms ± 1 digit.

f. Select 10 Megohm range. Connect input leads to a 19 Megohm standard resistor. Adjust R44 for a readout of 19.000 Megohms ± 1 digit.

g. Select 1 Megohm range. Connect input leads to a 1.9 megohm standard resistor. Adjust R42 for a readout of 1.9000 Megohms ± 1 digit.

h. Select 100 Kilohm range. Connect input leads to a 190 Kilohm standard resistor. Adjust R35 for a readout of 190.00 Kilohms ± 1 digit.

i. Select 10 Kilohm range. Connect input leads to a 19 Kilohm standard resistor. Adjust R23 for a readout of 19.000 Kilohms ± 1 digit.

j. Select 1 Kilohm range. Connect input leads to a 1.9 Kilohm standard resistor. Adjust R37 for a readout of 1.9000 Kilohms ± 1 digit.

k. Select 100 Ohm range. Connect input leads to a 190 Ohm standard resistor. Verify that readout is 190.00 Ohms ± 1 digit.

l. Select 10 Ohm range. Connect input leads to a 19 Ohm standard resistor. Remove + OHMS CURRENT lead from resistor. Verify that readout is 00000.

m. Change FUNCTION to DC/MV, RANGE to 10 MV. Verify readout of 00000. If necessary, readjust MV OFFSET on front panel for zero. Replace + OHMS CURRENT lead to resistor. Return FUNCTION to OHMS, RANGE to 10.

n. Adjust R25 for a readout of 19.000 Ohms ± 1 digit.

> NOTE
>
> When calibrating the 10-ohm and 1-ohm ranges; it is important that standard resistors have low-thermal characteristics. Otherwise, faulty calibration will result.

o. Select 1 Ohm range. Connect input leads to a 1.9 Ohm standard resistor. Verify that readout is 1.9000 Ohms ± 1 digit. If not, repeat the MV Offset adjustment (step m).

3.11 AC CALIBRATION (Perform steps in order listed. Refer to figure 3.2 for adjustment locations.)

3.12 AC Zero Adjustments. Place AC Converter on extender board. Remove Scaling Amplifier and replace with bypass board. Select AC, any range. The following zero adjustments are made with input terminals open.

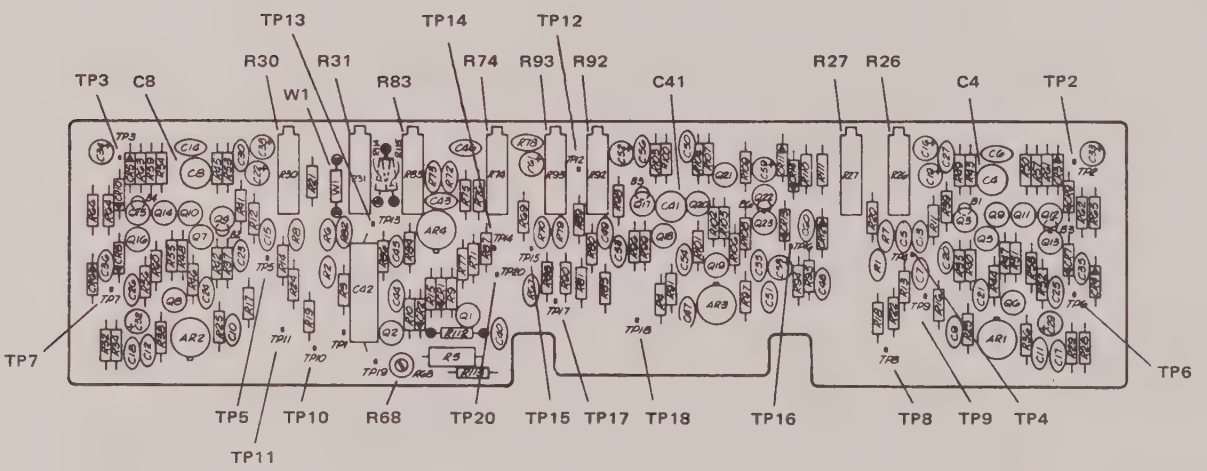

Figure 3.4 - Test Points - AC Converter

a. Bias Current Zero. Connect the microvoltmeter between the test points listed below and ground (TP9, TP11, or TP18). Place a 10 KΩ, 1/4 watt resistor in series with input probe. With the adjustment indicated for each test point, adjust for zero ± 10 μvolts.

Test Point (Figure 3.4)	Adjustment
TP8	R26
TP10	R30
TP17	R92
TP14	R74

b. Voltage Offset Zero. Adjust for zero ± 10 μvolts at the following test points with the indicated adjustment.

Test Point	Adjustment
TP4	R27
TP5	R31
TP15	R93
TP13	R83

c. Output Symmetry Adjustment. Adjust for symmetry at the following pairs of test points (e.g., if TP6 reads +6 μvolts, TP2 will read -6 μvolts when adjusted).

Test Points	Adjust:	Voltage at Balance
TP2, TP6	R27	less than ± 10 μvolts
TP3, TP7	R31	less than ± 30 μvolts
TP12, TP16	R93	less than ± 30 μvolts

d. 100 mV Zero Adjustment. Select 100 mV range. Apply 10.000 mvolts, 1 KHz to input terminals. Adjust AC ZERO for readout of .01000.

3.13 AVT Frequency Response Adjustment. Open jumper W1 on AC Converter (figure 3.4).

a. Apply 1.9000 volts RMS at 1 KHz to DVM input. Record the readout (about 1.5900).

b. Apply 1.9000 volts RMS @ 100 KHz to DVM input. Adjust C4 for same reading recorded at (a).

3.14 100 mV Gain Adjustment. Remove bypass board and replace with Scaling Amplifier. Leave AC Amplifier on extender. Select 100 mV range; apply 100 mV at 1 KHz. Adjust R10 on Scaling Amplifier for readout of 100.00 mV.

3.15 1V Gain Adjustment. Select 1-volt range; apply 1.0000 volt, 1 KHz signal to input terminals. Adjust R68 on AC Converter (figure 3.4) for readout of 1.0000.

3.16 Break Amplifier Frequency Response Adjustment. Replace jumper W1.

a. Apply 1.9000 volts RMS @ 1 KHz to DVM input. Record readout.

b. Apply 1.9000 volts RMS @ 100 KHz. Adjust C8 and C41 for minimum or maximum readout without oscillation or going into "lockup".

c. Readjust C8 and C41 for readout obtained in step (a) with approximately equal contribution from each capacitor.

3.17 Scaling Amplifier Low Frequency Gain Adjustment. Remove bypass board and replace with Scaling Amplifier. Remove AC Amplifier from extender and plug it

directly into connector. Apply the inputs listed below and adjust the indicated control (on Scaling Amplifier) for a readout equal to the input voltage.

RANGE	INPUT		
	VOLTAGE	FREQ	ADJUST
1V	1.9000V	1 KHz	R10 (1V LF)
10V	19.000V	1 KHz	R7 (10V LF)
100V	100.00V	1 KHz	R5 (100V LF)
1 KV	1 KV	1 KHz	R3 (1 KV LF)

Repeat step 3.11d (with Scaling Amplifier installed).

3.18 Scaling Amplifier High Frequency Gain Adjustment. Apply the inputs listed in the following table and adjust the indicated control (on Scaling Amplifier) for a readout equal to the input voltage. When completed, check frequency response to 1 MHz.* Readjust High Frequency (HF) adjustments if necessary. Check .1V range for calibration and frequency response.

RANGE	INPUT		
	VOLTAGE	FREQ	ADJUST
1 KV	500V	40 KHz	C16 (input HF)
1V	1.9V	100 KHz	C17 (1V HF)
10V	19V	100 KHz	C9 (10V HF)
100V	100V	100 KHz	C7 (100V HF)
1 KV	500V	40 KHz	C20 (1 KV HF)

*Maximum Inputs:

1000V to 20 KHz
500V to 40 KHz
100V to 200 KHz
20V to 1 MHz

3.19 After replacing AC Converter into closed DVM, recheck the 100 mV zero after instrument has warmed up for several minutes. Readjust R10, if necessary.

SECTION 4

DRAWINGS

4.1 DRAWINGS.

400961	Model 4800 DVM Assembly
403433	Interconnection PCB Assembly
430958	Interconnection PCB Schematic
403430	Display PCB Assembly
430957	Display PCB Schematic
403432	Digitizer PCB Assembly
430949	Digitizer PCB Schematic
403434	Isolator PCB Assembly
430951	Isolator PCB Schematic
403435	MV-Ohms PCB Assembly
430950	MV-Ohms PCB Schematic
403431	Switching PCB Assembly
430952	Switching Schematic
403502	Rear Input Accessory
403470	AC Converter PCB Assembly
430964	AC Converter PCB Schematic
403472	Scaling Amplifier PCB Assembly
430966	Scaling Amplifier PCB Schematic
403436	Program PCB Assembly
430959	Program PCB Schematic

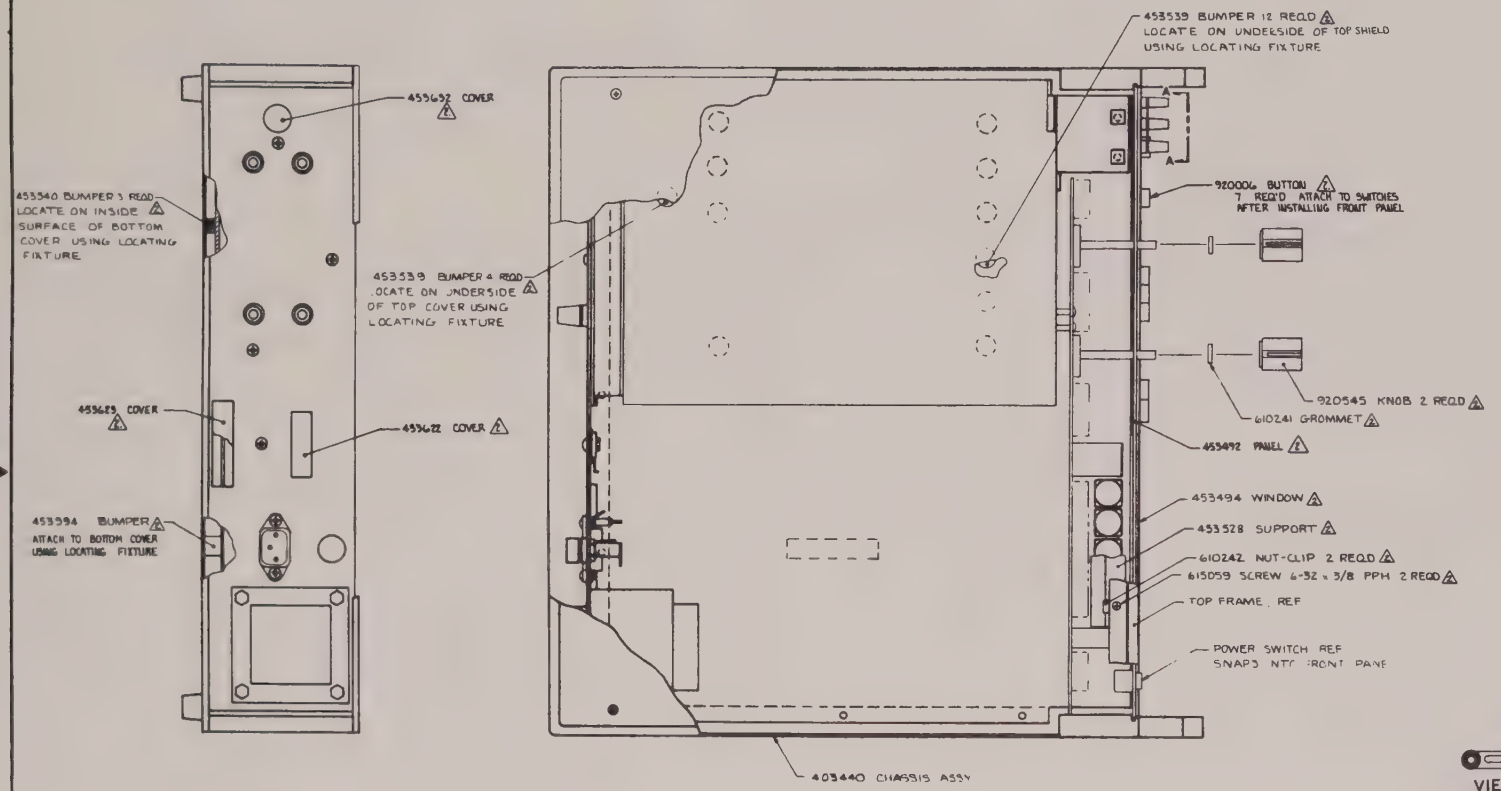
455632 COVER
453540 BUMPER 3 REQD LOCATE ON INSIDE SURFACE OF BOTTOM COVER USING LOCATING FIXTURE
453539 BUMPER 4 REQD LOCATE ON UNDERSIDE OF TOP COVER USING LOCATING FIXTURE
455623 COVER
455622 COVER
453394 BUMPER ATTACH TO BOTTOM COVER USING LOCATING FIXTURE
453539 BUMPER 12 REQD LOCATE ON UNDERSIDE OF TOP SHIELD USING LOCATING FIXTURE
920006 BUTTON 7 REQ'D ATTACH TO SWITCHES AFTER INSTALLING FRONT PANEL
920545 KNOB 2 REQD
610241 GROMMET
453492 PANEL
453494 WINDOW
453528 SUPPORT
610242 NUT-CLIP 2 REQD
615059 SCREW 6-32 x 3/8 PPH 2 REQD
TOP FRAME REF
POWER SWITCH REF SNAPS INTO FRONT PANEL
403440 CHASSIS ASSY
600239 SHORTING LINK 3 REQ'D
VIEW A-A

⚠ PART OF FINISHING KIT 403439

1. ASSEMBLY PROCEDURES AND PROCESSES TO CONFORM TO DANA WORKMANSHIP STANDARDS

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

ASSEMBLY DVM 4800

SIZE	CODE IDENT NO	DWG NO.	REV
D	21793	400361	E

SCALE NONE SHEET 1 OF 2

SHEET 2 IS AN 'A' SIZE

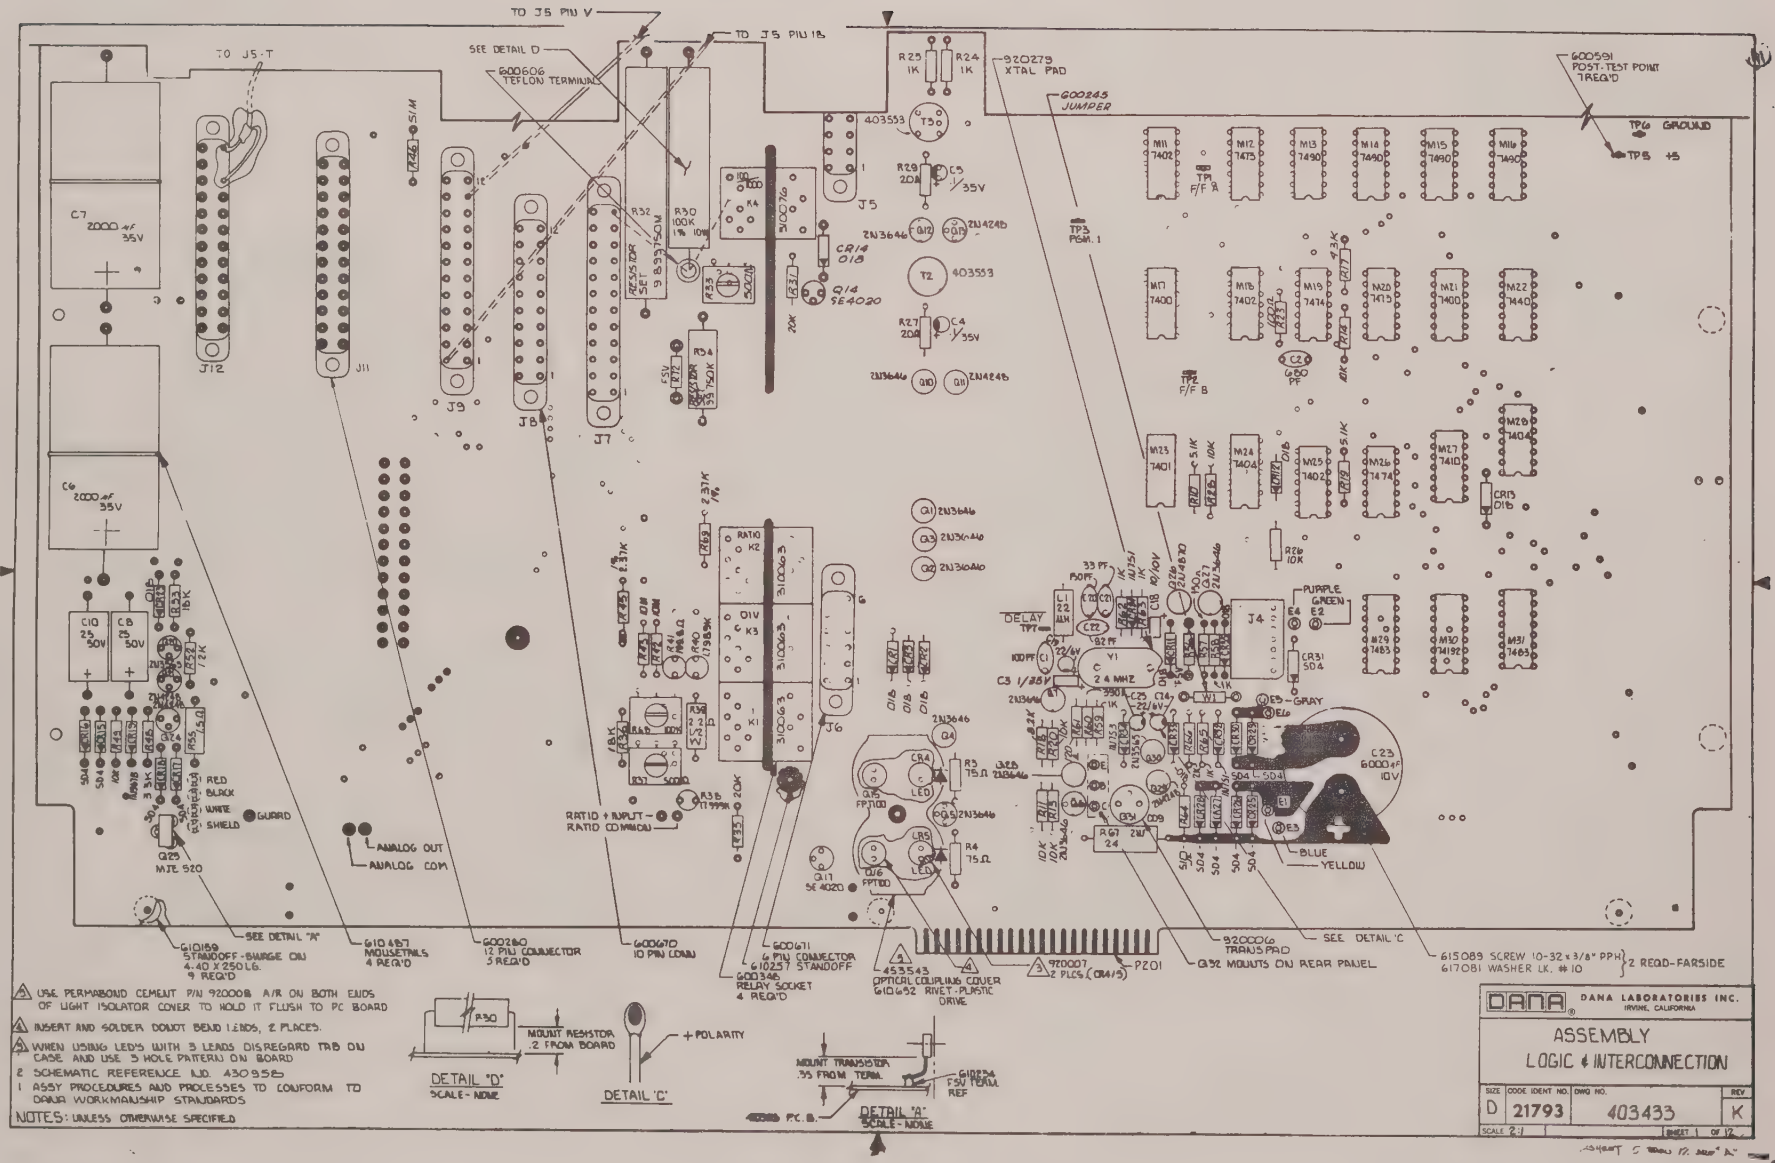
TO J5-T
TO J5 PIN V
TO J5 PIN 18
SEE DETAIL D
600606 TEFLON TERMINAL
920279 XTAL PAD
600245 JUMPER
600591 POST-TEST POINT REQ'D
TP6 GROUND
TP5 +5
J12
J11
J9
J8
J7
J5
J6
J4
C7 2000 uf 35V
C6 2000 uf 35V
C10 25 50V
C8 25 50V
R25 1K
R24 1K
R29 20M
C5 35V
R30 100K 1% 10W
R27 20M
C4 35V
R32 RESISTOR SET 9.893750M
R33 50K
R34 750K
R35 50K
R31 20K
CR16 D18
Q14 SE4020
T3 403553
T2 403553
2N3646
2N4248
M11 7402
M12 7473
M13 7490
M14 7490
M15 7490
M16 7490
M17 7400
M18 7402
M19 7474
M20 7473
M21 7400
M22 7440
M23 7401
M24 7404
M25 7402
M26 7474
M27 7410
M28 7404
M29 7483
M30 74192
M31 7483
TP1 F/F A
TP2 F/F B
TP3 PGM. 1
C2 680 PF
R77 4.3K
R78 10K
R79 5.1K
R80 10K
R81 5.1K
R82 10K
R26 10K
CR15 D18
CR14 D18
CR13 D18
CR12 D18
CR11 D18
CR10 D18
CR9 D18
CR8 D18
CR7 D18
CR6 D18
CR5 D18
CR4 LED
CR3 LED
CR2 LED
CR1 LED
CR31 504
CR32 504
CR33 504
CR34 504
CR35 504
CR36 504
CR37 504
CR38 504
CR39 504
CR40 504
CR41 504
CR42 504
CR43 504
CR44 504
CR45 504
CR46 504
CR47 504
CR48 504
CR49 504
CR50 504

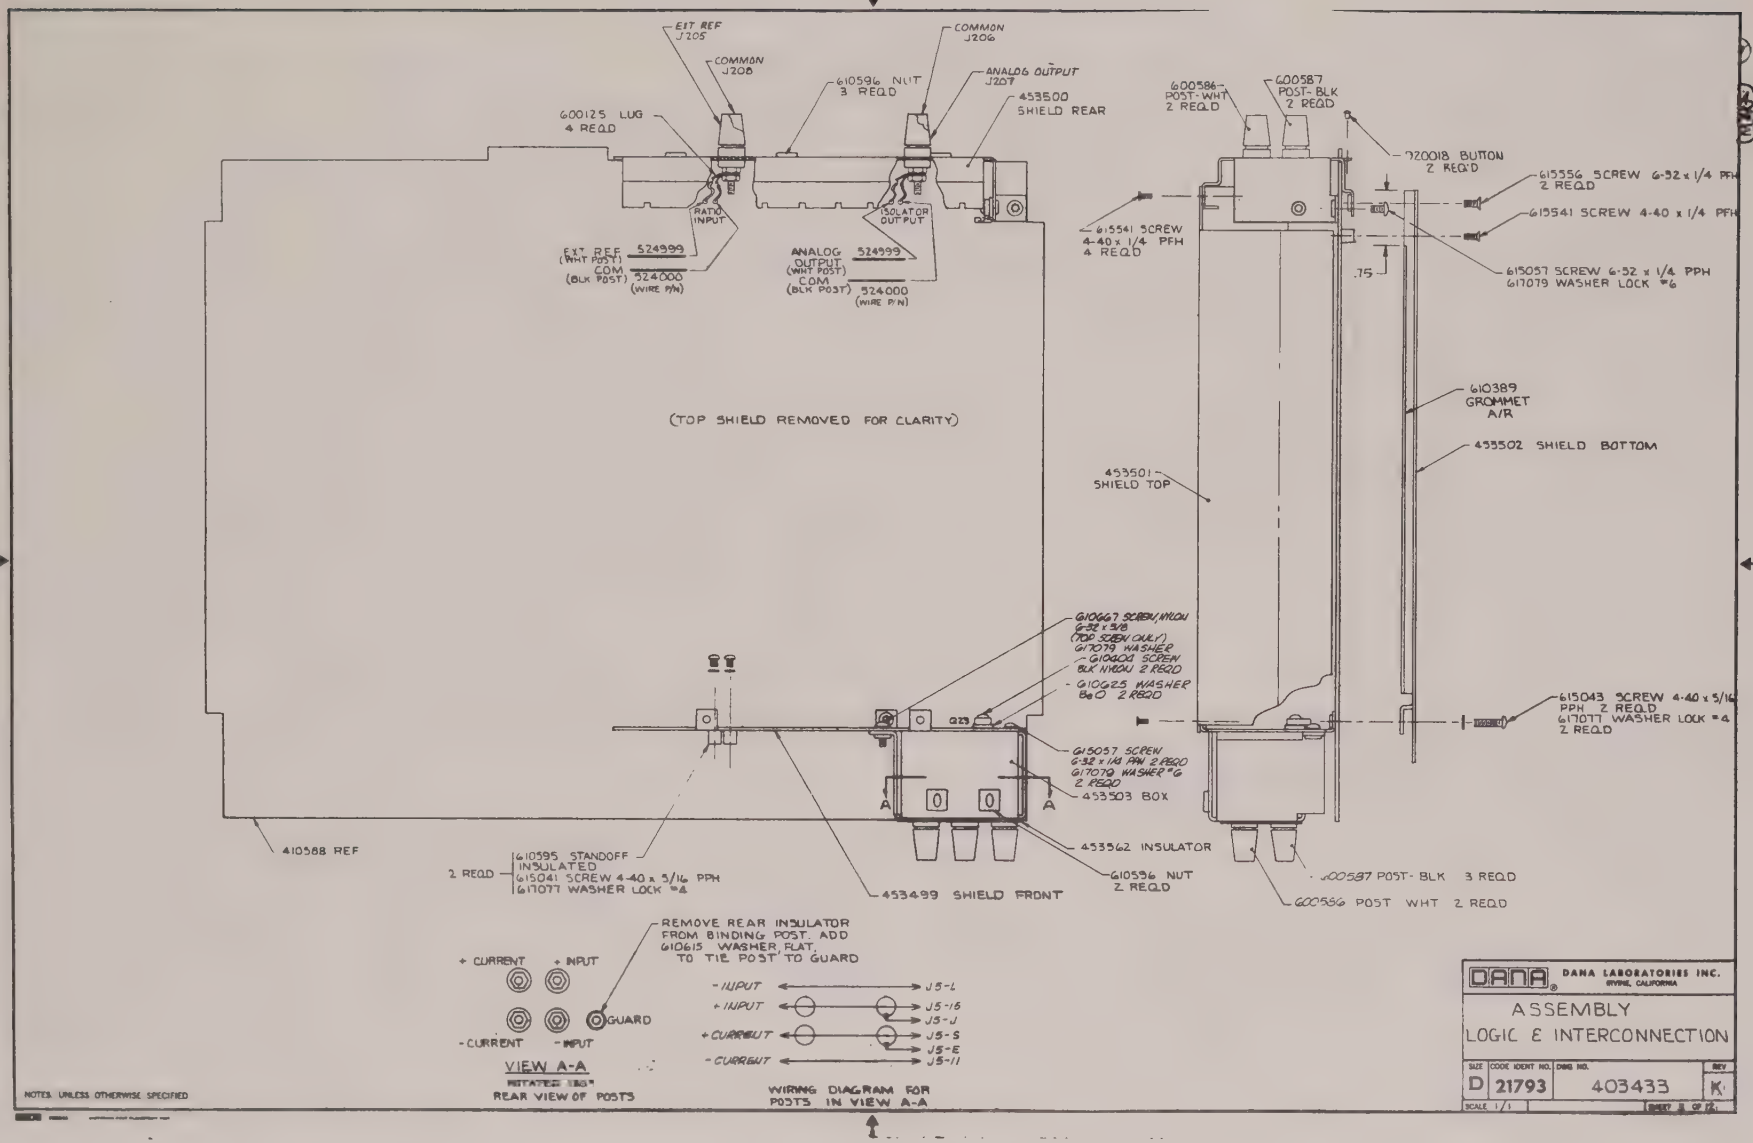
EXT REF J205
COMMON J206
COMMON J208
610596 NUT 3 REQ'D
ANALOG OUTPUT J207
600125 LUG 4 REQ'D
453500 SHIELD REAR
600586 POST-WHT 2 REQ'D
600587 POST-BLK 2 REQ'D
720018 BUTTON 2 REQ'D
615556 SCREW 6-32 x 1/4 PFH 2 REQ'D
615541 SCREW 4-40 x 1/4 PFH
615541 SCREW 4-40 x 1/4 PFH 4 REQ'D
615057 SCREW 6-32 x 1/4 PPH 617079 WASHER LOCK #6
.75
RATIO INPUT
ISOLATOR OUTPUT
EXT. REF (WHT POST) 524999
COM (BLK POST) 524000 (WIRE P/N)
ANALOG OUTPUT (WHT POST) 524999
COM (BLK POST) 524000 (WIRE P/N)
(TOP SHIELD REMOVED FOR CLARITY)
610389 GROMMET A/R
453502 SHIELD BOTTOM
453501 SHIELD TOP
610667 SCREW NYLON 6-32 x 3/8 (TOP SCREW ONLY) 617079 WASHER
610604 SCREW BLK NYLON 2 REQ'D
610625 WASHER BLO 2 REQ'D
615043 SCREW 4-40 x 5/16 PPH 2 REQ'D 617077 WASHER LOCK #4 2 REQ'D
615057 SCREW 6-32 x 1/4 PAN 2 REQ'D 617079 WASHER #6 2 REQ'D
453503 BOX
453562 INSULATOR
610596 NUT 2 REQ'D
600587 POST-BLK 3 REQ'D
600556 POST WHT 2 REQ'D
453499 SHIELD FRONT
410588 REF
2 REQ'D
610595 STANDOFF INSULATED
615041 SCREW 4-40 x 5/16 PPH
617077 WASHER LOCK #4
REMOVE REAR INSULATOR FROM BINDING POST. ADD 610615 WASHER, FLAT, TO TIE POST TO GUARD
+ CURRENT
+ INPUT
GUARD
- CURRENT
- INPUT
VIEW A-A
ROTATED 180°
REAR VIEW OF POSTS
-INPUT J5-L
+INPUT J5-16
J5-J
+CURRENT J5-S
J5-E
-CURRENT J5-11
WIRING DIAGRAM FOR POSTS IN VIEW A-A
NOTES: UNLESS OTHERWISE SPECIFIED
DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA
ASSEMBLY
LOGIC & INTERCONNECTION
SIZE D
CODE IDENT NO. 21793
DWG NO. 403433
REV K
SCALE 1/1
SHEET 8 OF 12

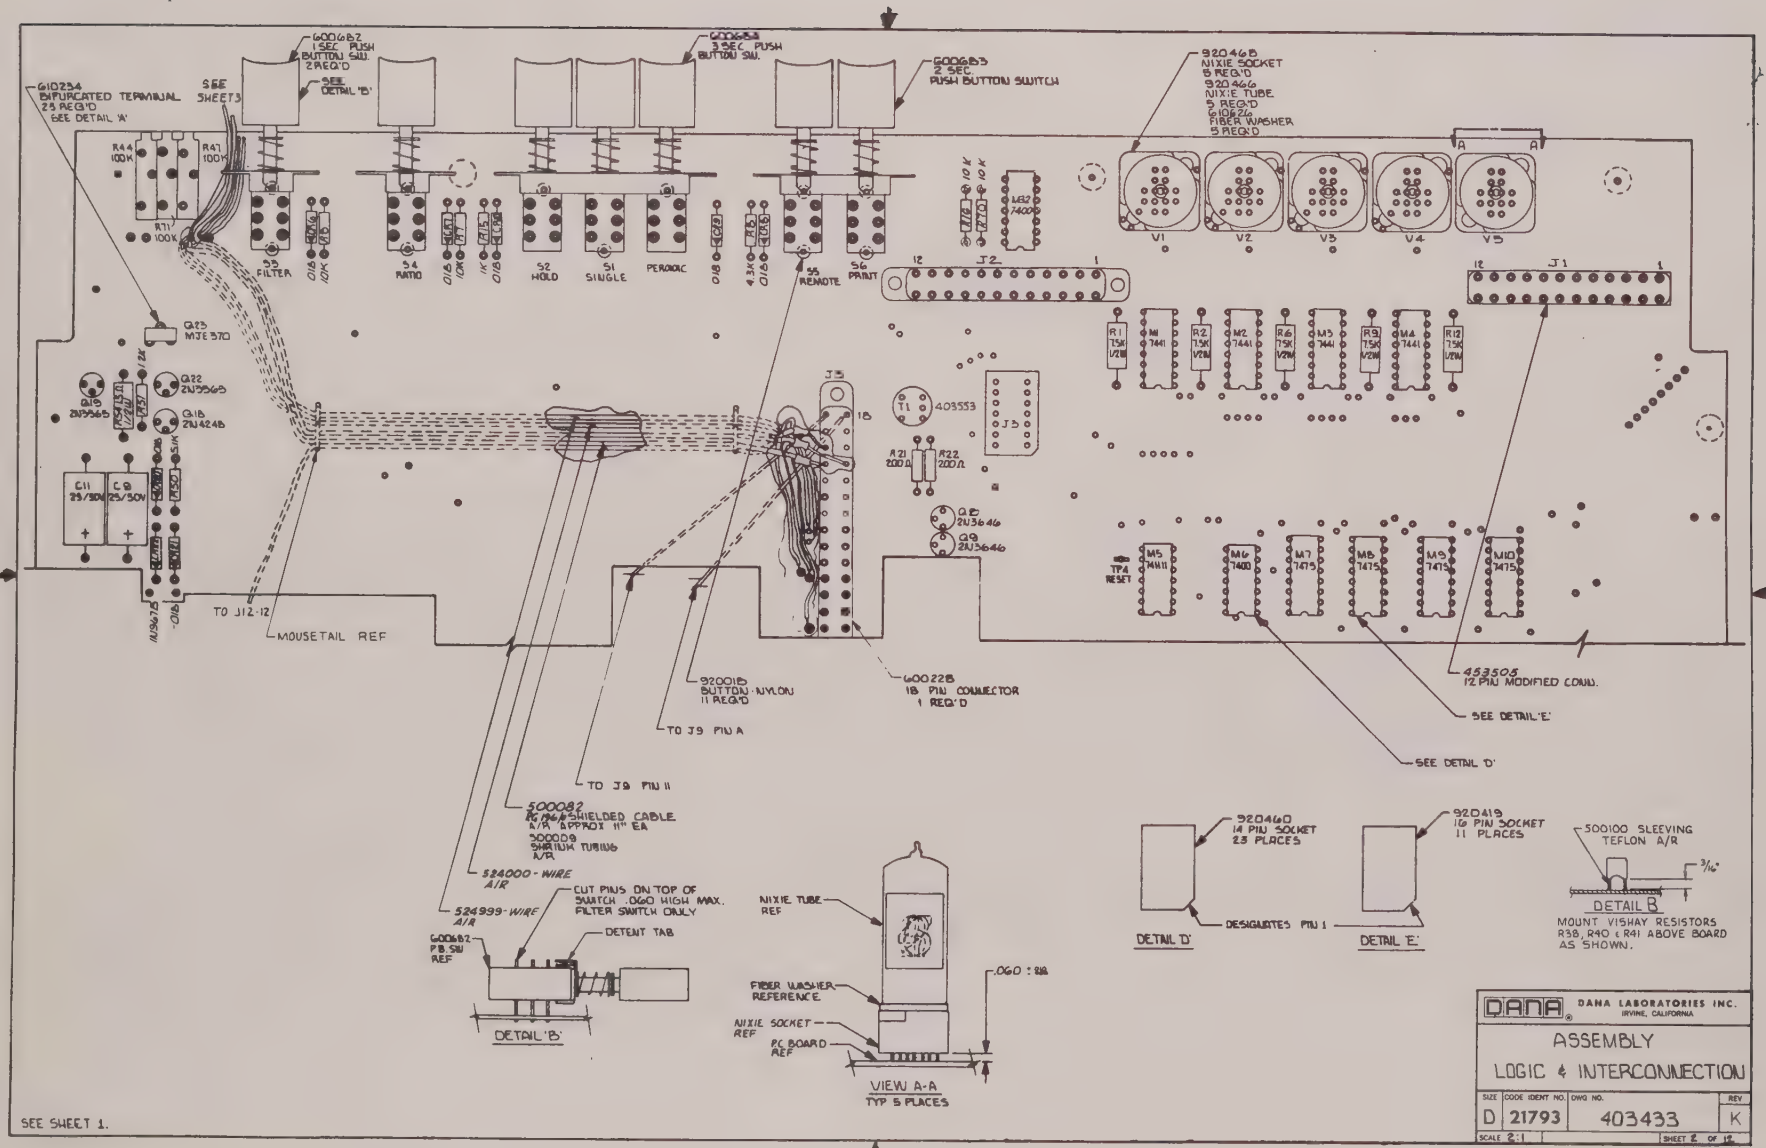

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

ASSEMBLY LOGIC & INTERCONNECTION

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	403433	K

SCALE 2:1 SHEET 2 OF 12

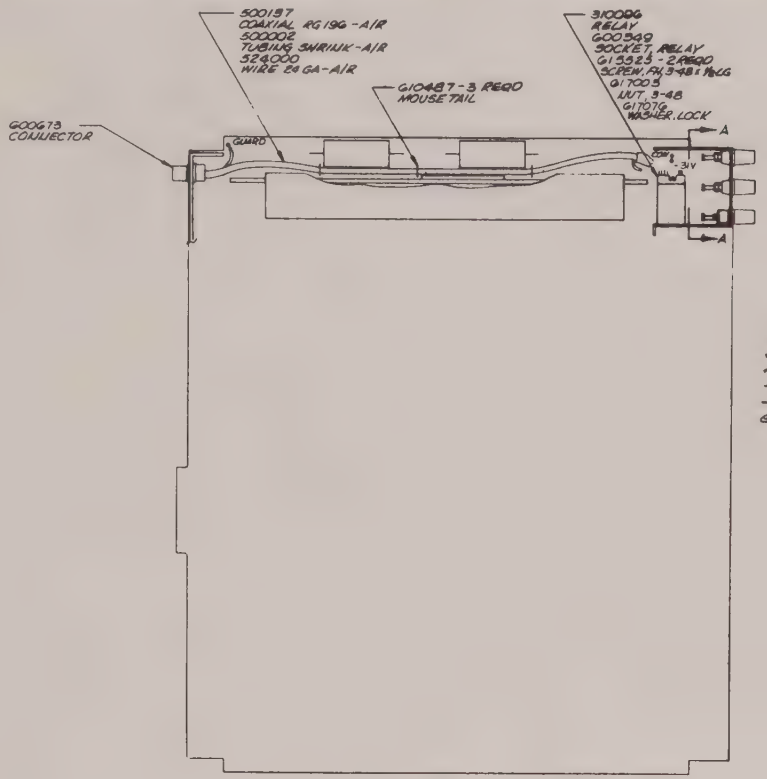

WIRING DIAGRAM

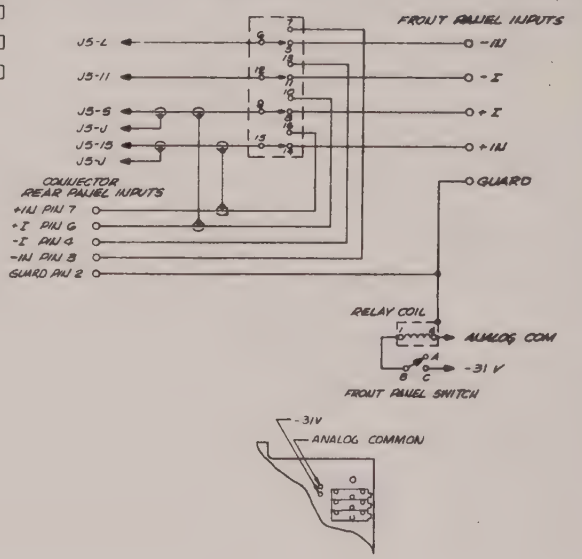

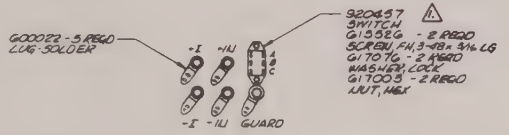

VIEW A-A

⚠ USE LOCTITE #242 ON SCREWS.

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

ASSEMBLY
LOGIC & INTERCONNECTION

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	403433	K

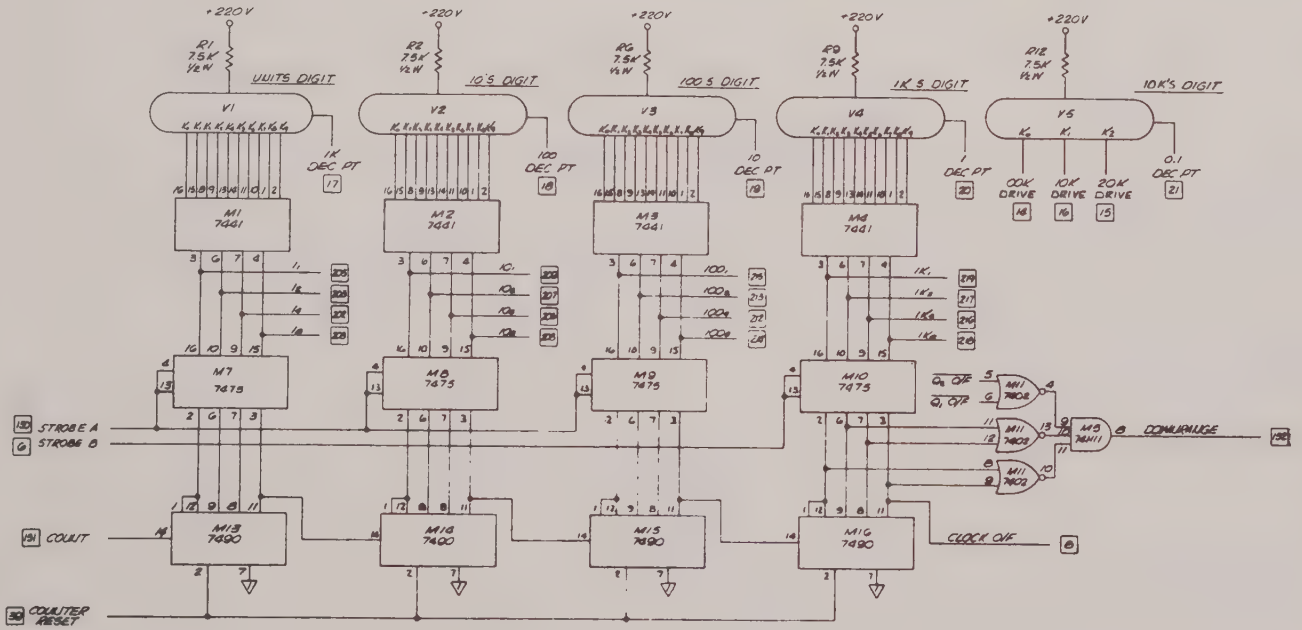

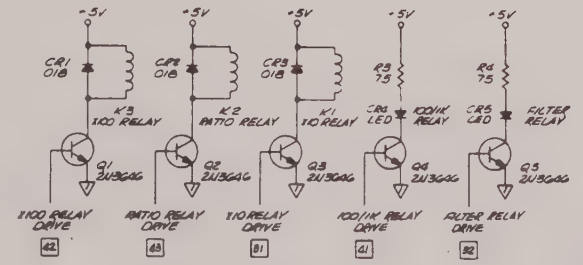

10. ☐ INDICATES CONNECTIONS
    1-48 — J1, J2
    100-109 — J3
    150-160 — INTERCONNECTION
    200-219 — PCB1
9. ANALOG COMMON IS TIED TO MECCA

⚠ TRANSISTOR TO BE MOUNTED TO REAR PANEL

7. 7812, V_{CC} 15 ON PIN 8 & GND 15 ON PIN 16
6. 7490, V_{CC} 15 ON PIN 5 & GND 15 ON PIN 10
5. 7473, V_{CC} 15 ON PIN 4 & GND 15 ON PIN 11
4. 7441, 7475, 7485, V_{CC} 15 ON PIN 5 & GND 15 ON PIN 12
3. 7400, 7401, 7402, 7403, 7411, 7410, 7460 7476, V_{CC} 15 ON PIN 14 & GND 15 ON PIN 7
2. GROUND ▽ DESIGNATES ANALOG GROUND
1. GROUND ▽ DESIGNATES DIGITAL GROUND

NOTES: UNLESS OTHERWISE SPECIFIED

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
LOGIC & INTERCONNECTION

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430958	A

SCALE — SHEET 1 OF 3

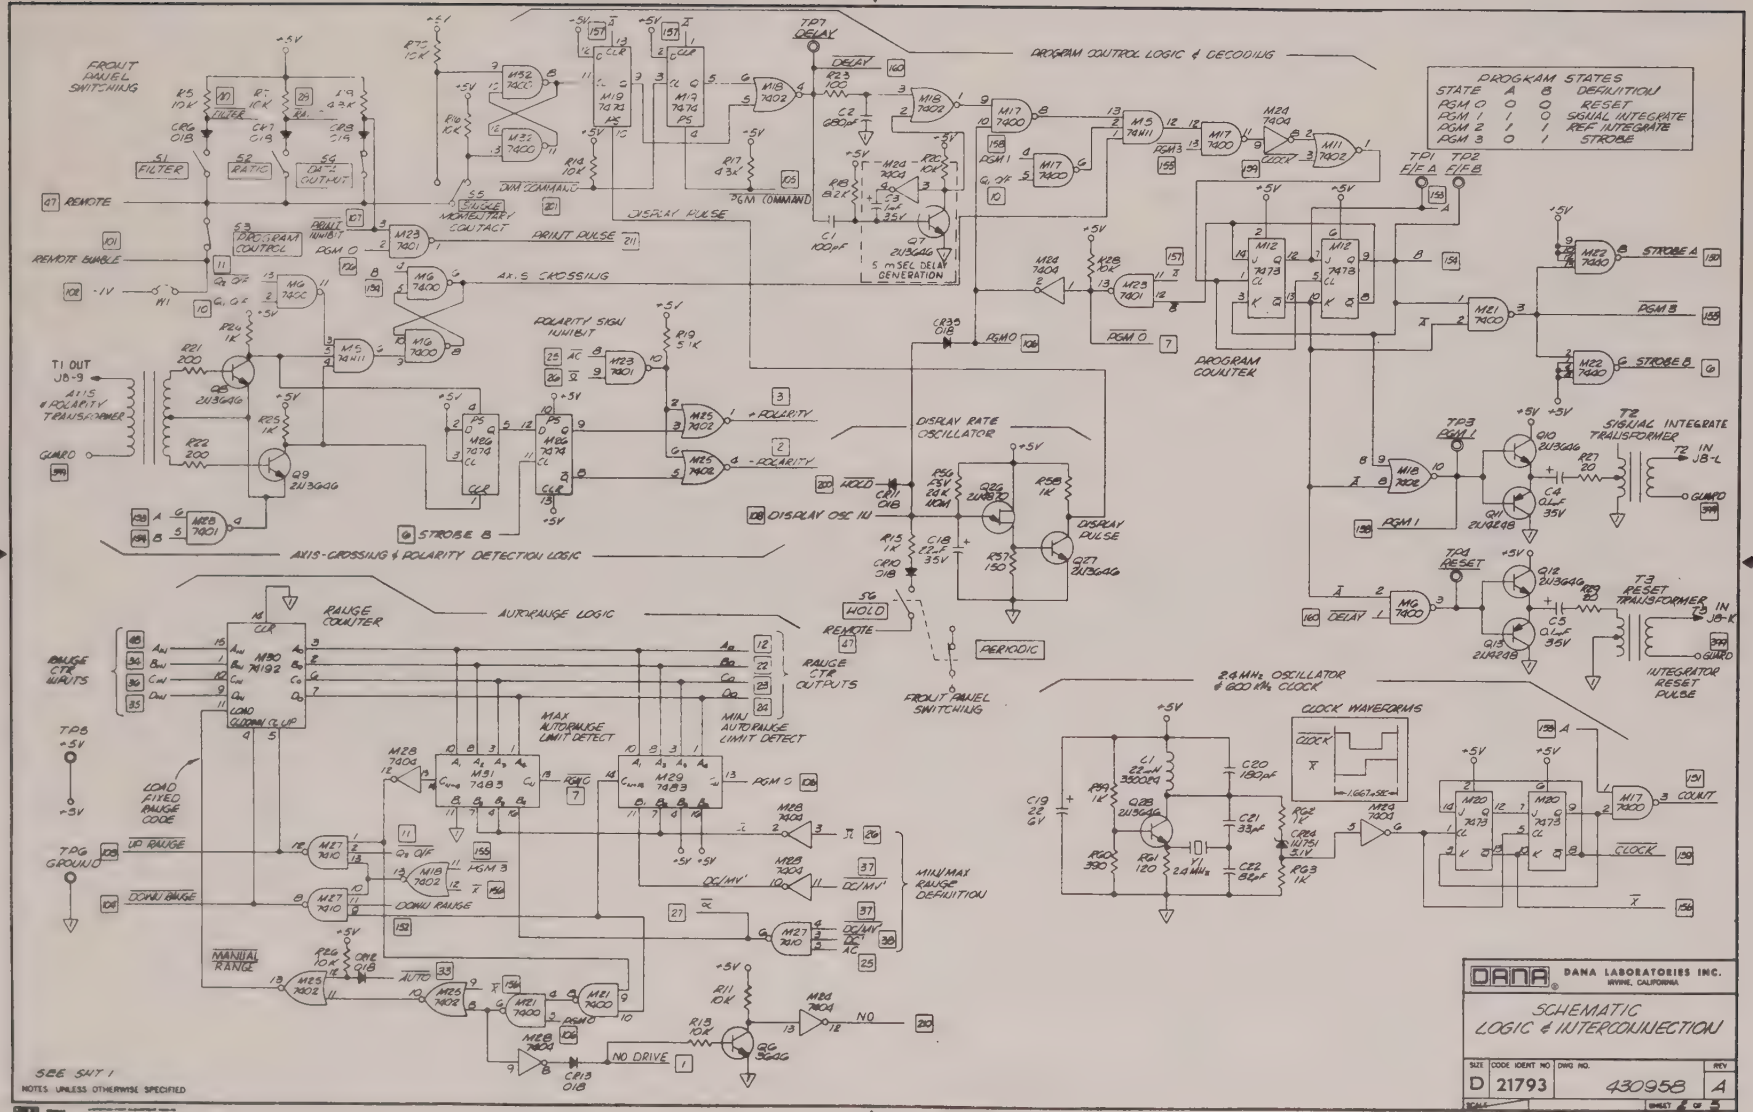

DANA DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
LOGIC & INTERCONNECTION

SIZE	CODE IDENT NO	DWG NO.	REV
D	21793	430958	A

SCALE — SHEET 2 OF 5

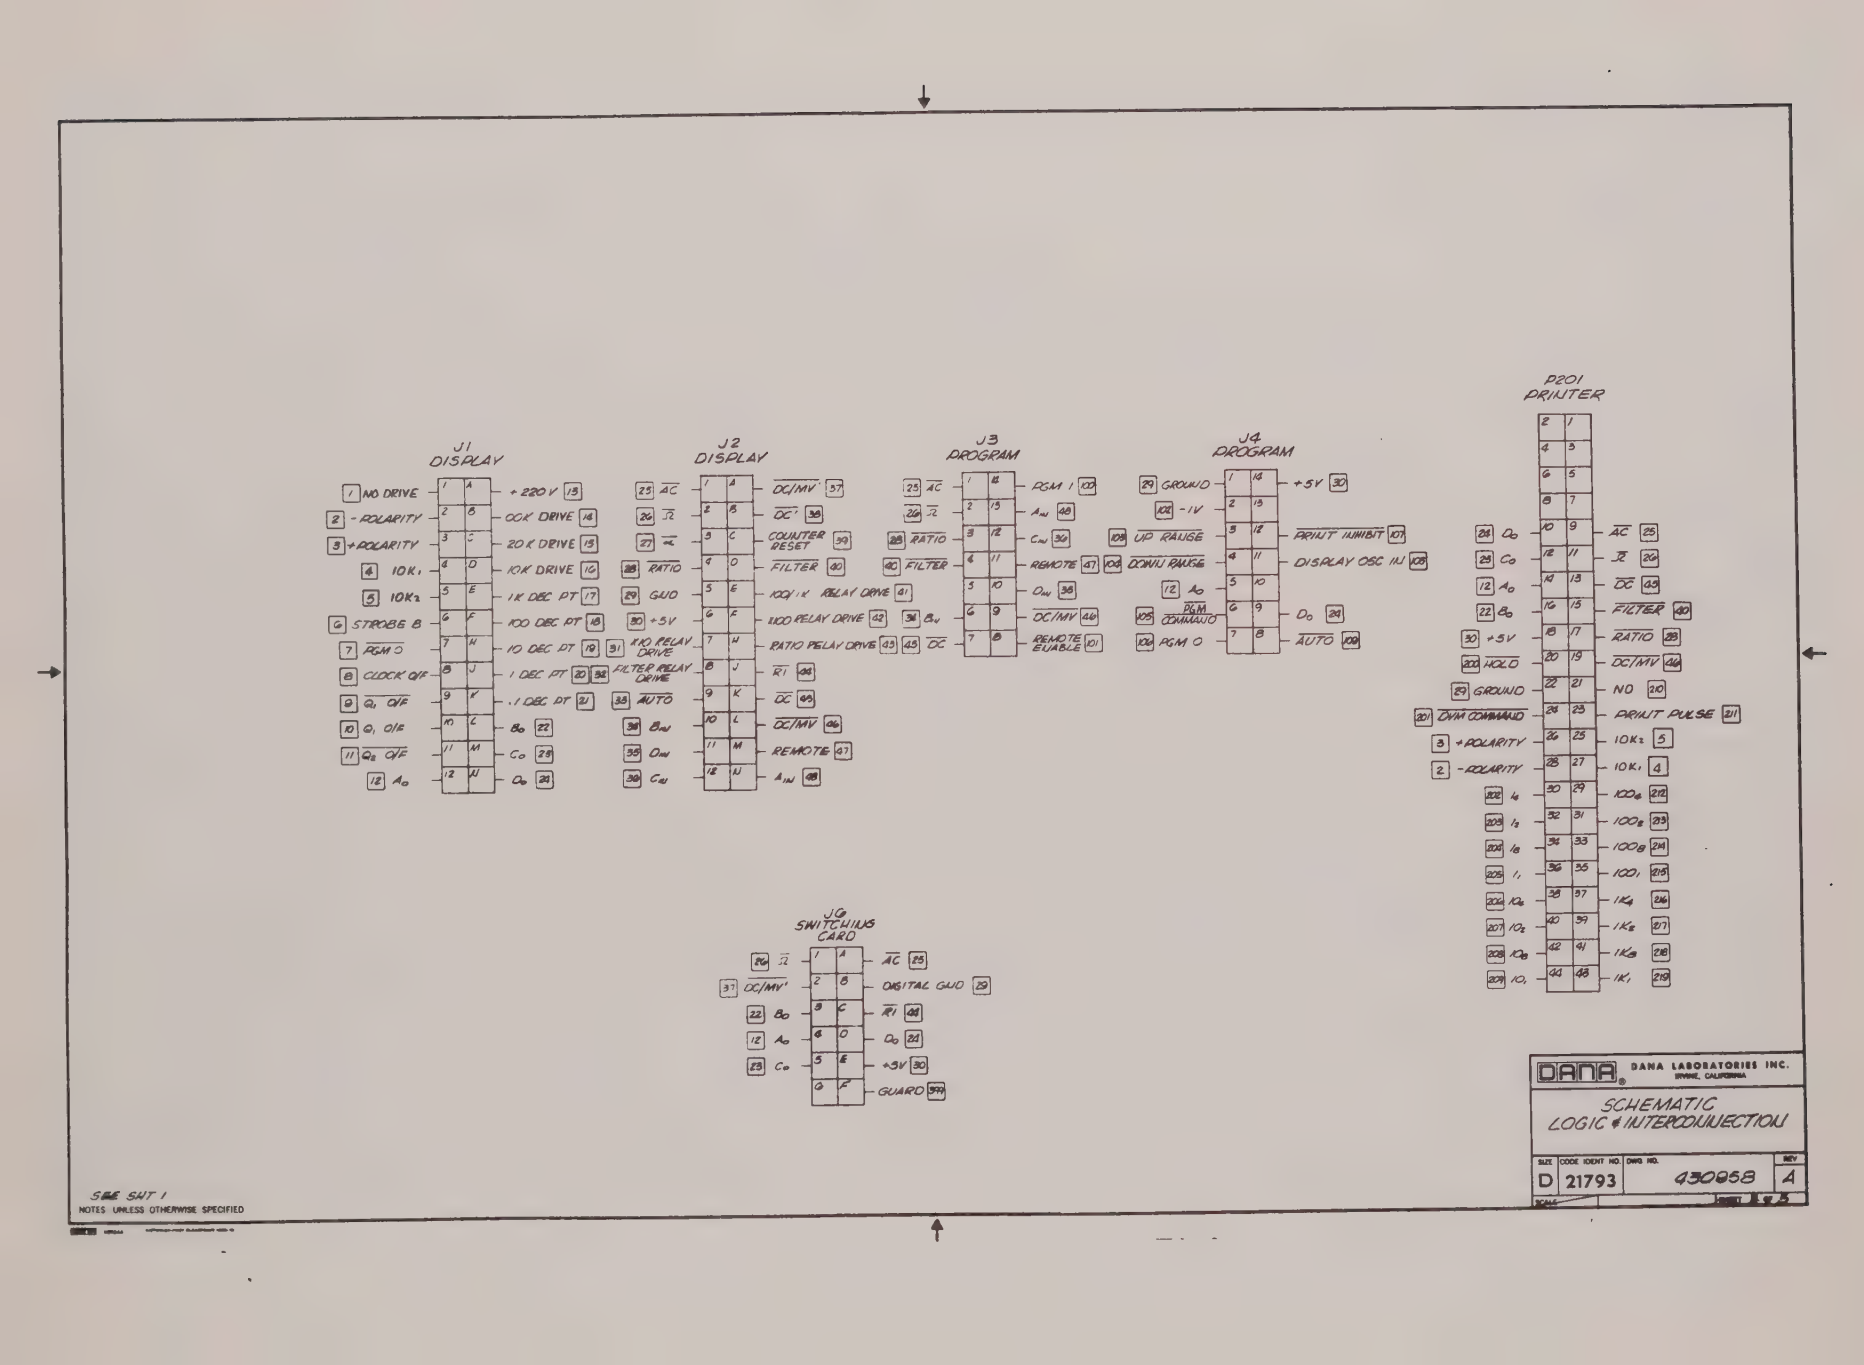
J1 DISPLAY
1 NO DRIVE
2 - POLARITY
3 + POLARITY
4 10K1
5 10K2
6 STROBE B
7 PGM 0
8 CLOCK O/F
9 Q1 O/F
10 Q1 O/E
11 Q2 O/F
12 A0
+220 V 19
CCK DRIVE 14
20 K DRIVE 15
10K DRIVE 16
1K DEC PT 17
100 DEC PT 18
10 DEC PT 19 31
1 DEC PT 20 32
.1 DEC PT 21
B0 22
C0 23
D0 24
J2 DISPLAY
25 AC
26 J2
27 K
RATIO 28
GND 29
+5V 30
X10 RELAY DRIVE
FILTER RELAY DRIVE
AUTO 38
B1N 39
D1N 39
C1N 39
DC/MV' 57
DC' 58
COUNTER RESET 59
FILTER 60
100/1 RELAY DRIVE 61
100 RELAY DRIVE 62
RATIO RELAY DRIVE 63 65 DC
R1 66
DC 65
DC/MV 66
REMOTE 67
A1N 68
J3 PROGRAM
25 AC
26 J2
RATIO 28
FILTER 40
PGM 1 102
A1N 68
C1N 39
REMOTE 67 106
D1N 38
DC/MV 66
REMOTE ENABLE 101
J4 PROGRAM
29 GROUND
-1V 103
UP RANGE 105
DOWN RANGE 104
12 A0
PGM COMMAND 105
PGM 0 106
+5V 30
PRINT INHIBIT 107
DISPLAY OSC IN 108
D0 24
AUTO 109
P201 PRINTER
24 D0
25 C0
12 A0
22 B0
30 +5V
200 HOLD
29 GROUND
201 DVM COMMAND
3 + POLARITY
2 - POLARITY
202 4
203 2
204 1
205 1,
206 10
207 10
208 10
209 10,
AC 25
J2 26
DC 58
FILTER 60
RATIO 28
DC/MV 66
NO 210
PRINT PULSE 211
10K2 5
10K1 4
100 212
100 213
100 214
100 215
1K 216
1K 217
1K 218
1K, 219
J6 SWITCHING CARD
J2 J2
37 DC/MV'
22 B0
12 A0
23 C0
AC 25
DIGITAL GND 29
R1 66
D0 24
+5V 30
GUARD 999
SEE SHT 1
NOTES UNLESS OTHERWISE SPECIFIED
DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA
SCHEMATIC LOGIC & INTERCONNECTION
SIZE D
CODE IDENT NO. 21793
DWG NO. 430958
REV A
SCALE
SHEET 1 OF 5

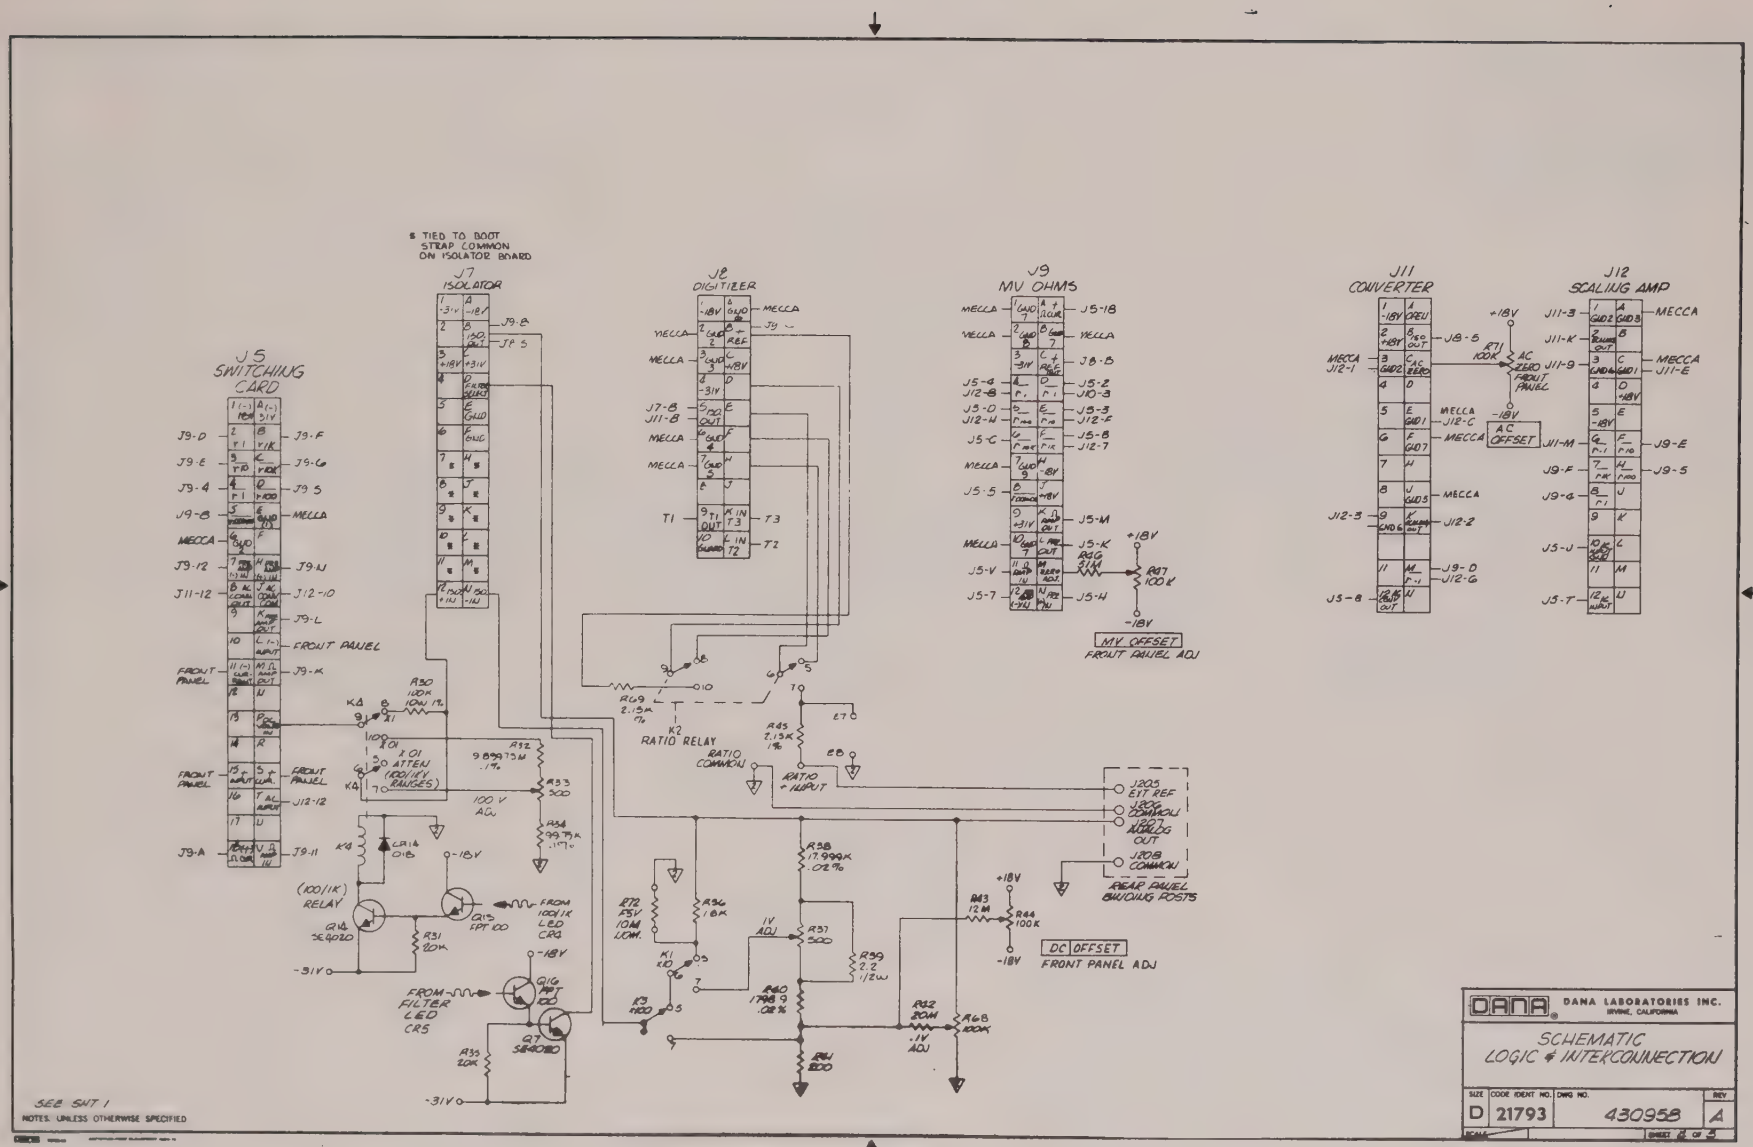

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

SCHEMATIC LOGIC & INTERCONNECTION

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430958	A

SCALE — SHEET 2 OF 3

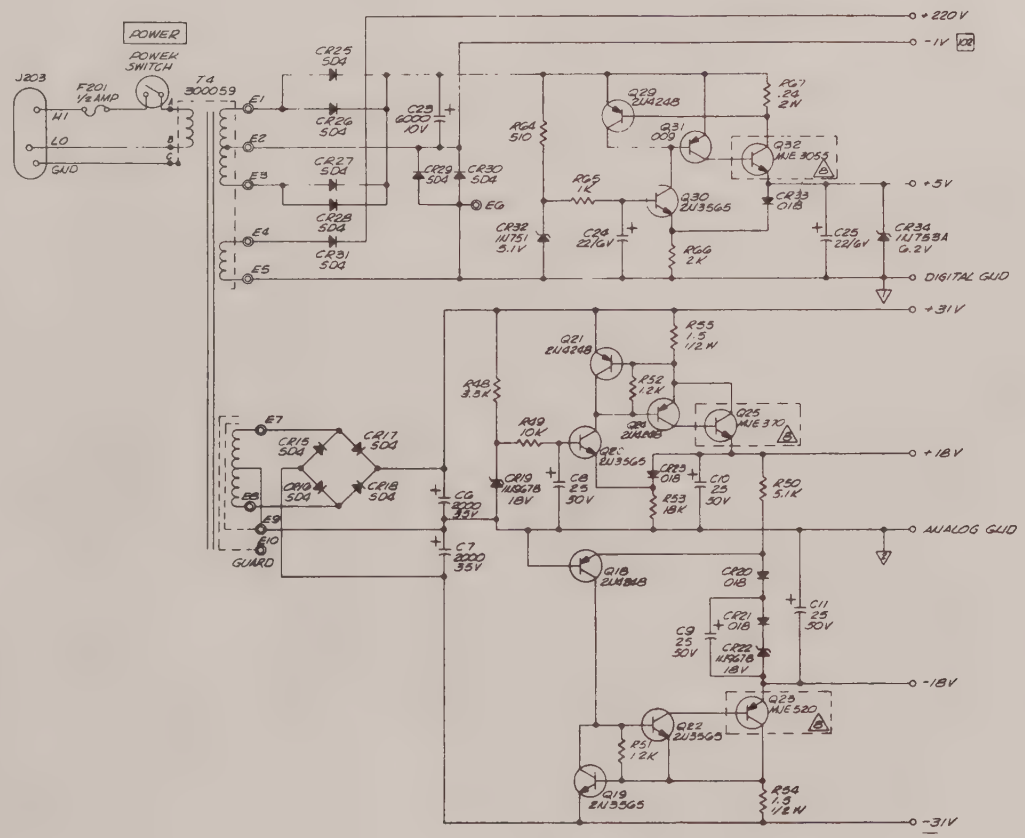



LINE VOLTAGE	JUMPER
100 V	2-3-6
120 V	1-3-7
200 V	5-6
220 V	4-6
240 V	4-7

T4 EXPORT OPTION (300066)

SEE SHT 1

NOTES: UNLESS OTHERWISE SPECIFIED

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

SCHEMATIC
LOGIC & INTERCONNECTION

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430958	A

SCALE | SHEET 5 of 8

REVISIONS				
LTR	DESCRIPTION	DR	CHK	APPD
A	RELEASED PER DAN # 974	5/30/70		
B	ADDED R46,R52 & 2 TERMINALS PER EO 5992	7/14/70		
C	CR20 WAS 1N974 PER EO 6012			
D	ADD 610198 TO P/L. PER E.O. 6060			
E	REVISE HARDWARE PER E.O. 6173			
F	CR20 WAS 1N957 EO 6280			

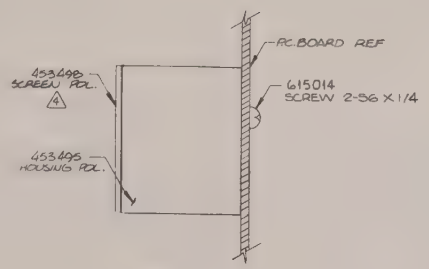

VIEW C-C

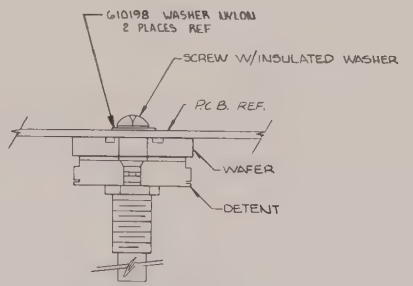

VIEW A-A
TYPICAL 2 PLACES

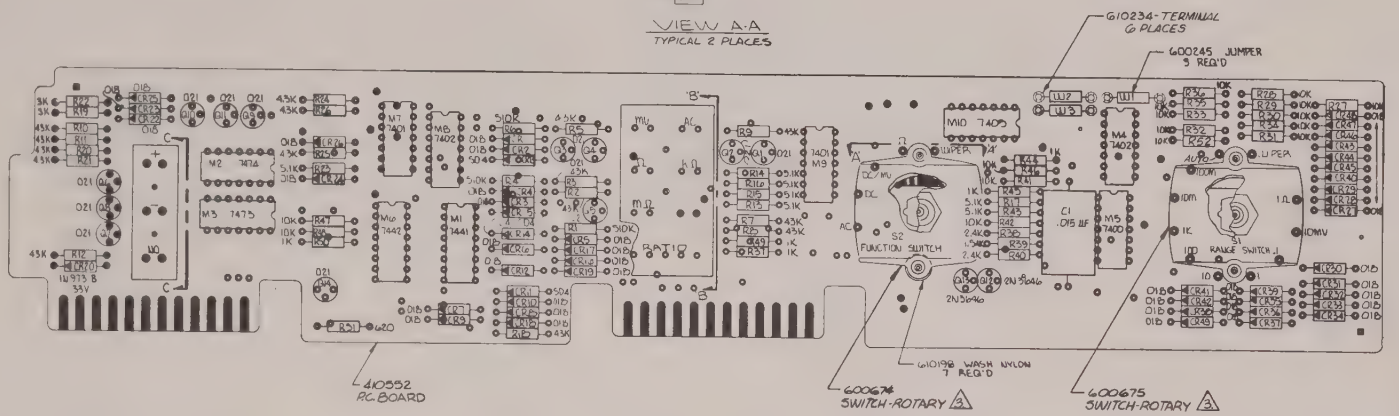

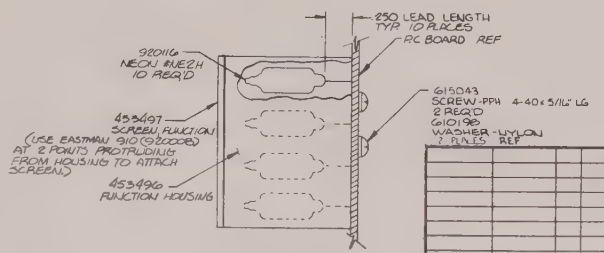
.250 LEAD LENGTH TYP 10 PLACES
PC BOARD REF
920116 NECK BUSH 10 REQ'D
615043 SCREW-PPH 4-40 x 5/16" LG 2 REQ'D
610198 WASHER-NYLON 2 PLACES REF
453497 SCREEN, FUNCTION (USE EASTMAN 910 (920008) AT 2 POINTS PROTRUDING FROM HOUSING TO ATTACH SCREEN.)
453496 FUNCTION HOUSING

VIEW B-B

3 USE EASTMAN 910 P/N 920008 AT 2 POINTS PROTRUDING FROM HOUSING TO ATTACH POLARITY SCREEN.

4 DETENT PART OF SWITCH SHALL BE TURNED FULL COUNTER CLOCK WISE BEFORE FINAL MATING WITH WAFER.

2 SCHEMATIC REF. # 450957

1 ASSY PROCESS (S) AND PROCEDURES TO CONFORM TO DANA MFGR'S MANUAL OF STANDARDS.

NOTES: UNLESS OTHERWISE SPECIFIED

403442	4800		
NEXT DWG	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE THICKNESS OF PLATING.

TOLERANCES

DECIMALS	ANGLES	HOLE DIAMETERS
X .030 XX .010 XXX .010	0° 30' FORMED 1° 0'	+ .004 - .001

DIMENSIONS AND TOLERANCES PER USAS Y14.5M

MATERIAL | FINISH

DRAWN	K.C.	4-8-70
CHECK	C.P. BAKER	4/14/70
DESIGN		4-21-70
W'CH ENGR		
PROJ ENGR	G. Gillette	6-21-70
PROD ENGR	D. Bates	4/24/70

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

ASSY DISPLAY BOARD

SIZE	CODE IDENT NO	DWG NO.	REV
D	21793	403430	F

SCALE 2:1 SHEET 1 OF 4

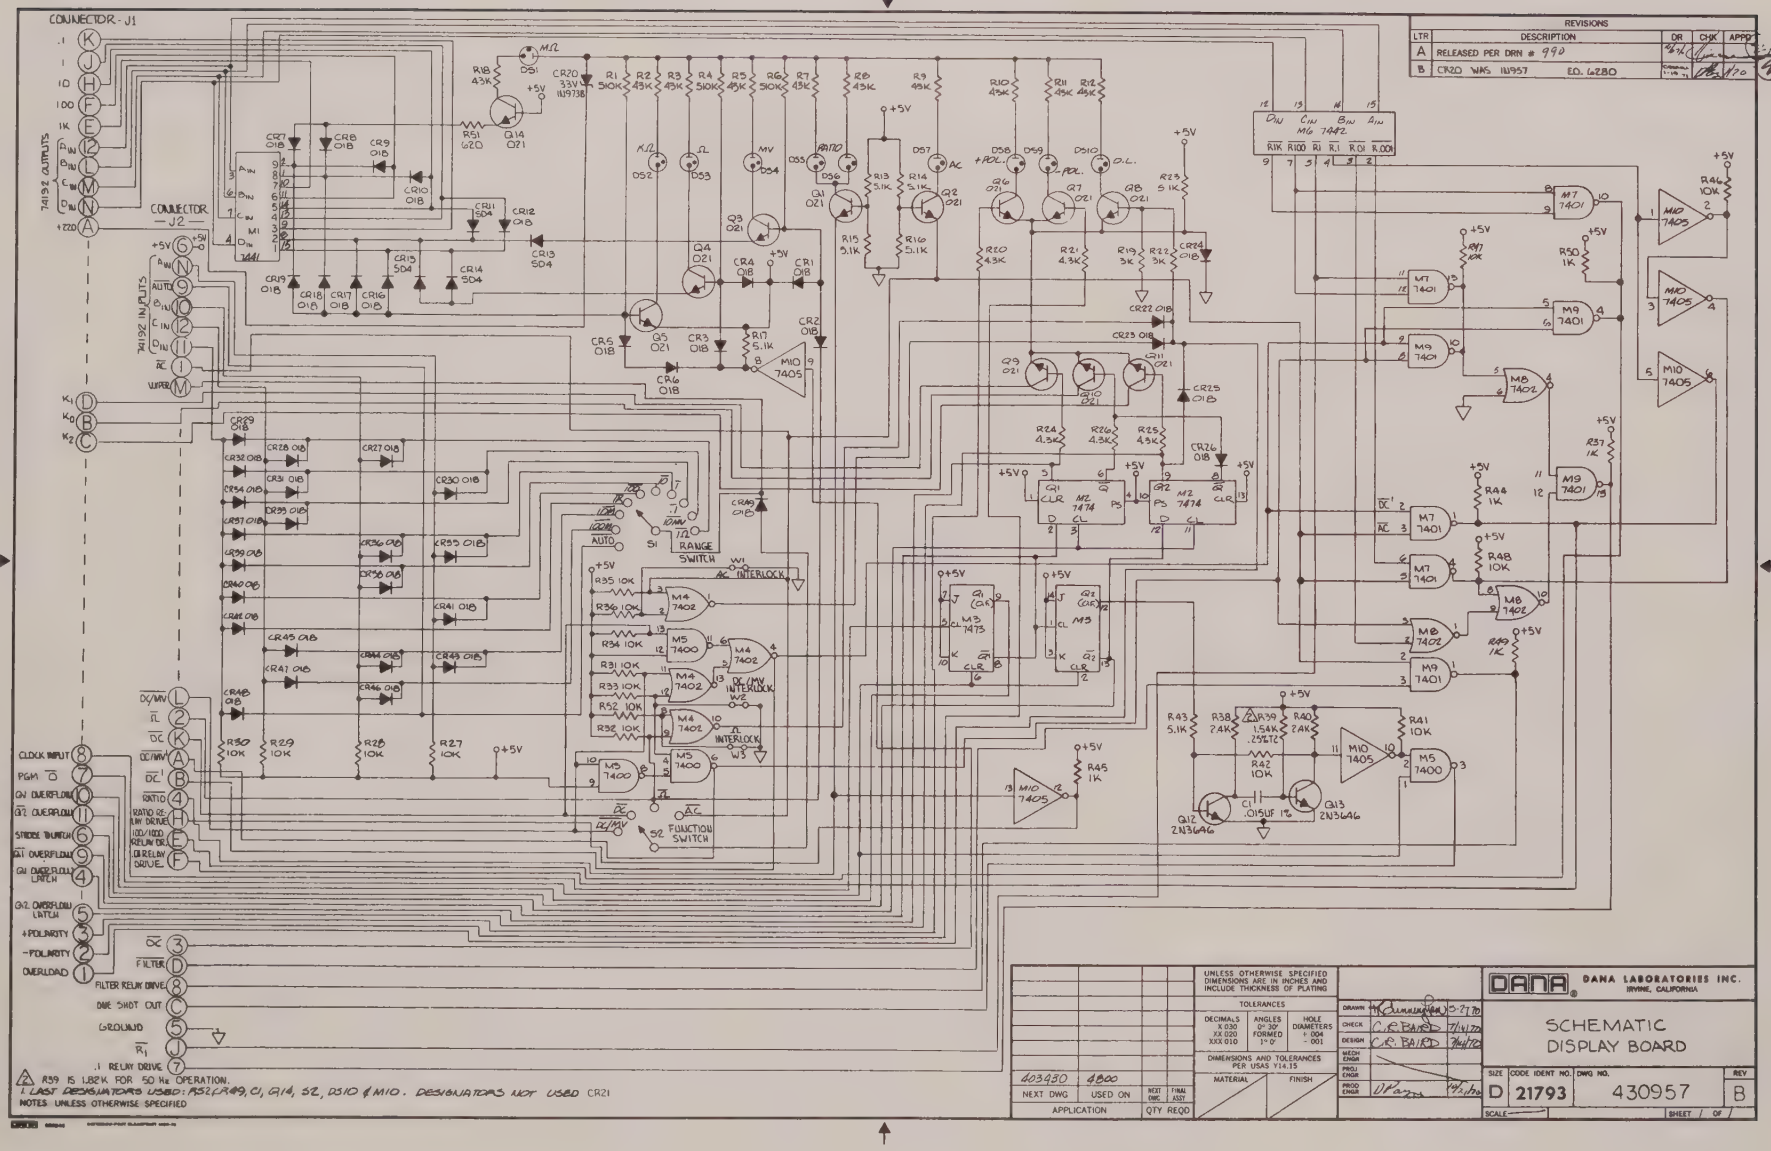

REVISIONS				
LTR	DESCRIPTION	DR	CHK	APPD
A	RELEASED PER DRN # 990			
B	CR20 WAS 111957 ECO. 6280			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE THICKNESS OF PLATING

TOLERANCES

DECIMALS X .030 XX .020 XXX .010 | ANGLES 0° 30' FORMED 1° 0' | HOLE DIAMETERS + .004 - .001

DIMENSIONS AND TOLERANCES PER USAS Y14.15

MATERIAL | FINISH

DRAWN			
CHECK	C.S. BAIRD	7/14/70	
DESIGN	C.S. BAIRD	7/14/70	
MECH ENGR			
PROJ ENGR			
PROD ENGR			

403930	4800		
NEXT DWG	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QTY REQD	

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
DISPLAY BOARD

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430957	B

SCALE | SHEET 1 OF 1

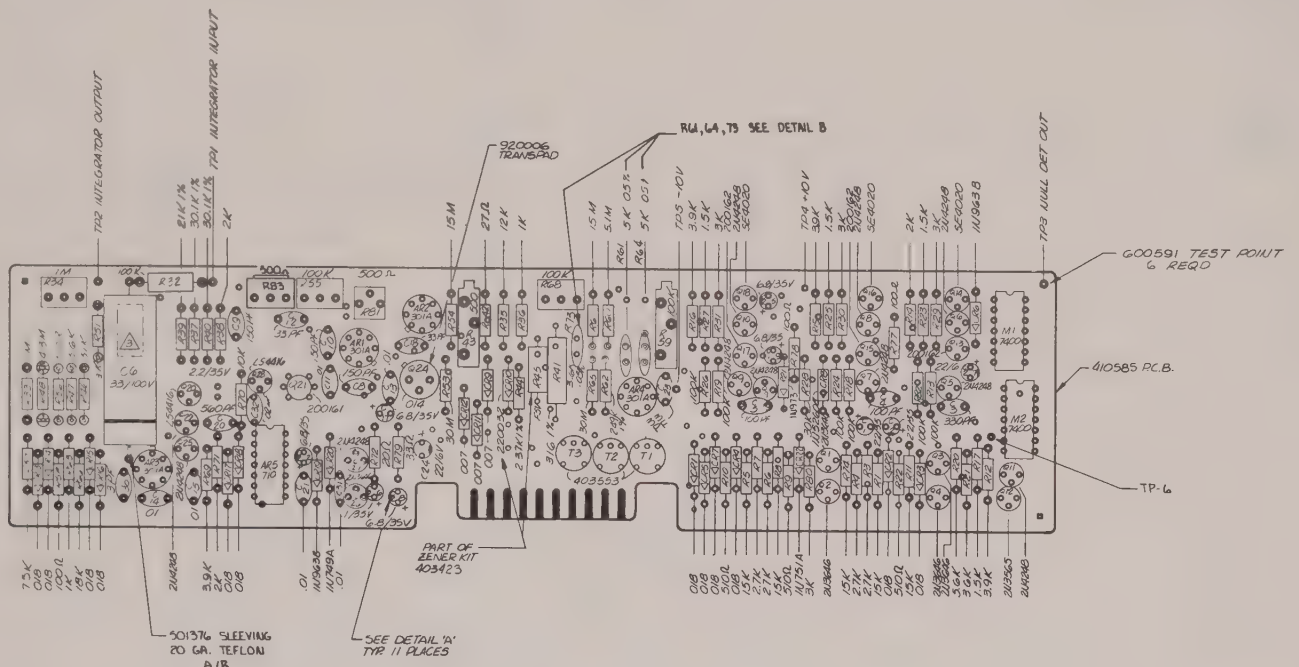

DETAIL "A"

TYP FOR AR1, AR2, AR3, AR4



DETAIL D

MOUNT VISHAY RESISTORS R14, 64 & 79 ABOVE PCB PAD SHOWN.

⚠ PLACE ZELUS STICKER PART 403423 ASSY ON TOP OF C6

2 SCHEMATIC REF # 450349

ASSEMBLY PROCESSES & PROCEDURES TO CONFORM TO DANA WORKMANSHIP STANDARDS.

NOTES UNLESS OTHERWISE NOTED

DANA LABORATORIES INC.
IRVINE CALIFORNIA

ASSEMBLY
DIGITIZER

SIZE	CODE IDENT NO	DWG NO	REV
D	21793	403432	F

SCALE 2:1 SHEET 1 OF 5

SHEETS 2 THRU 5 ARE A SIZE

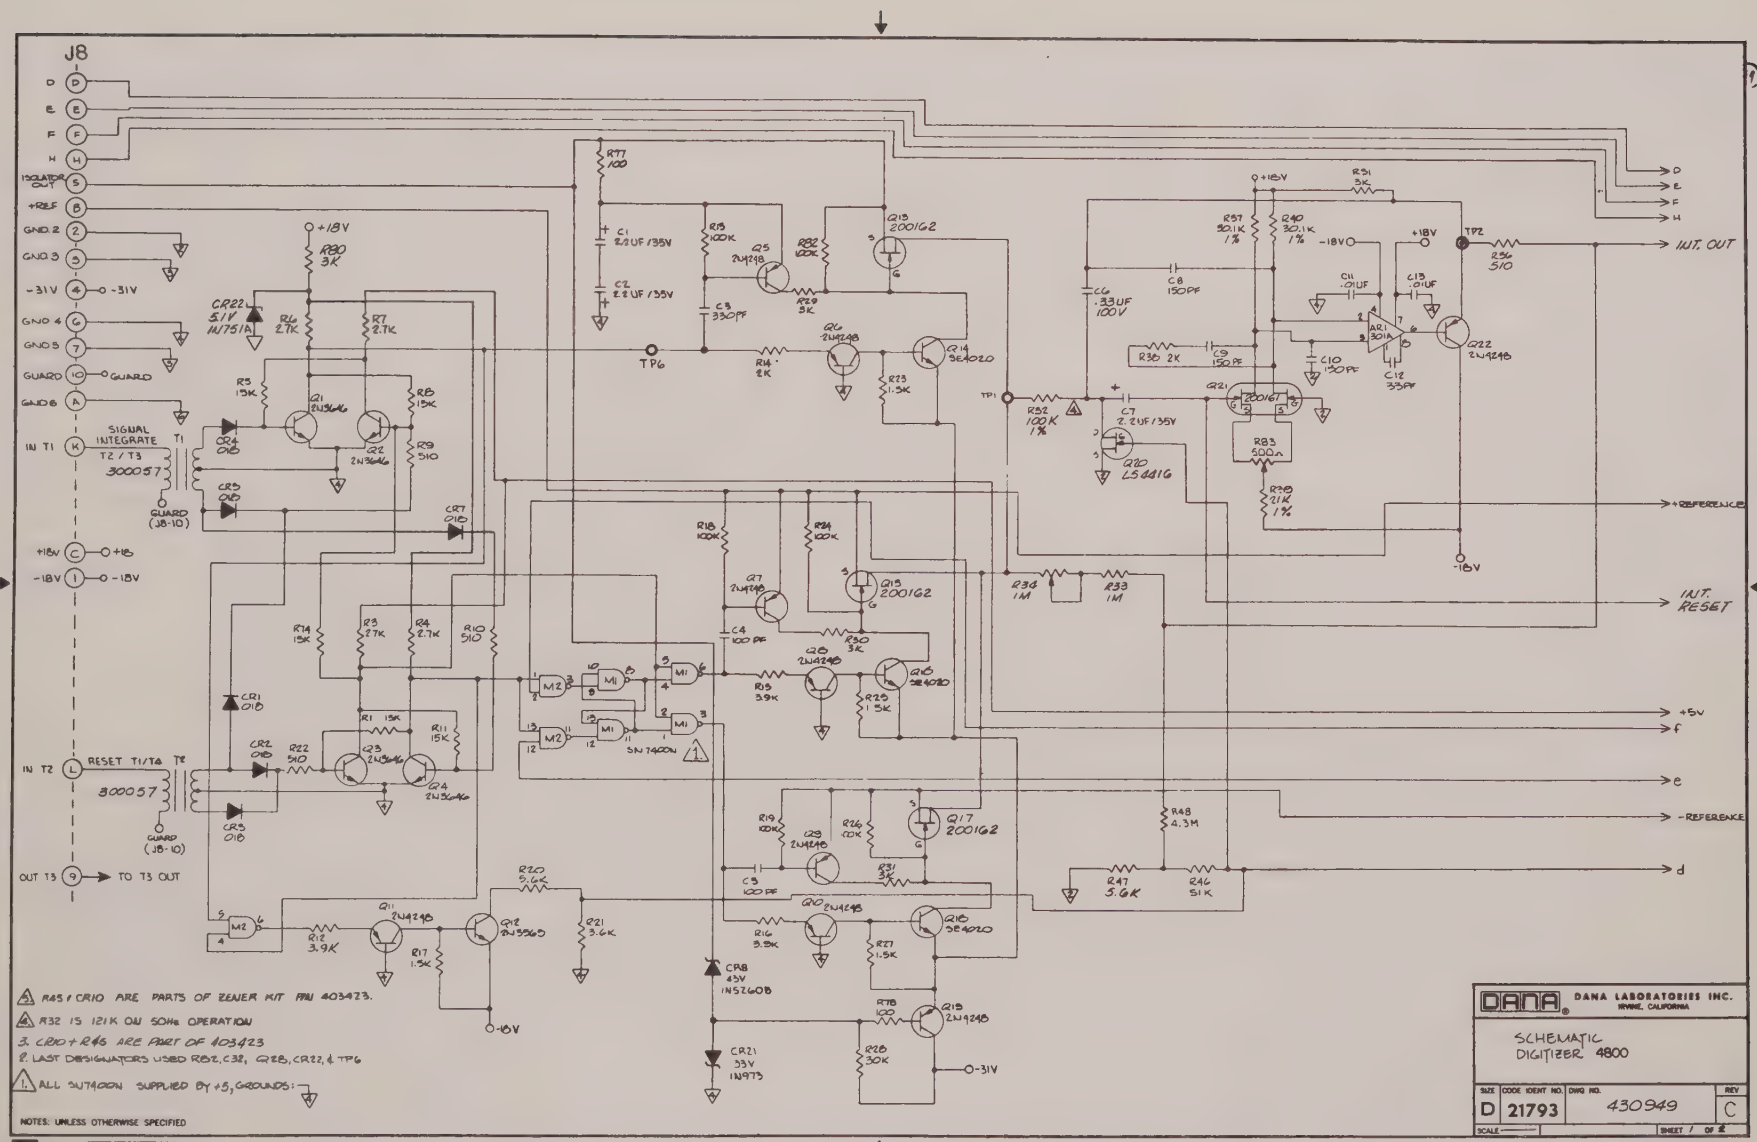

⚠5 R45 / CR10 ARE PARTS OF ZENER KIT PN 403423.

⚠4 R32 IS 121K ON 50Hz OPERATION

3. CR10 + R45 ARE PART OF 403423

2. LAST DESIGNATORS USED R82, C32, Q28, CR22, & TP6

⚠1 ALL SN7400N SUPPLIED BY +5, GROUNDS:

NOTES: UNLESS OTHERWISE SPECIFIED

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

SCHEMATIC DIGITIZER 4800

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430949	C

SCALE — SHEET 1 OF 2

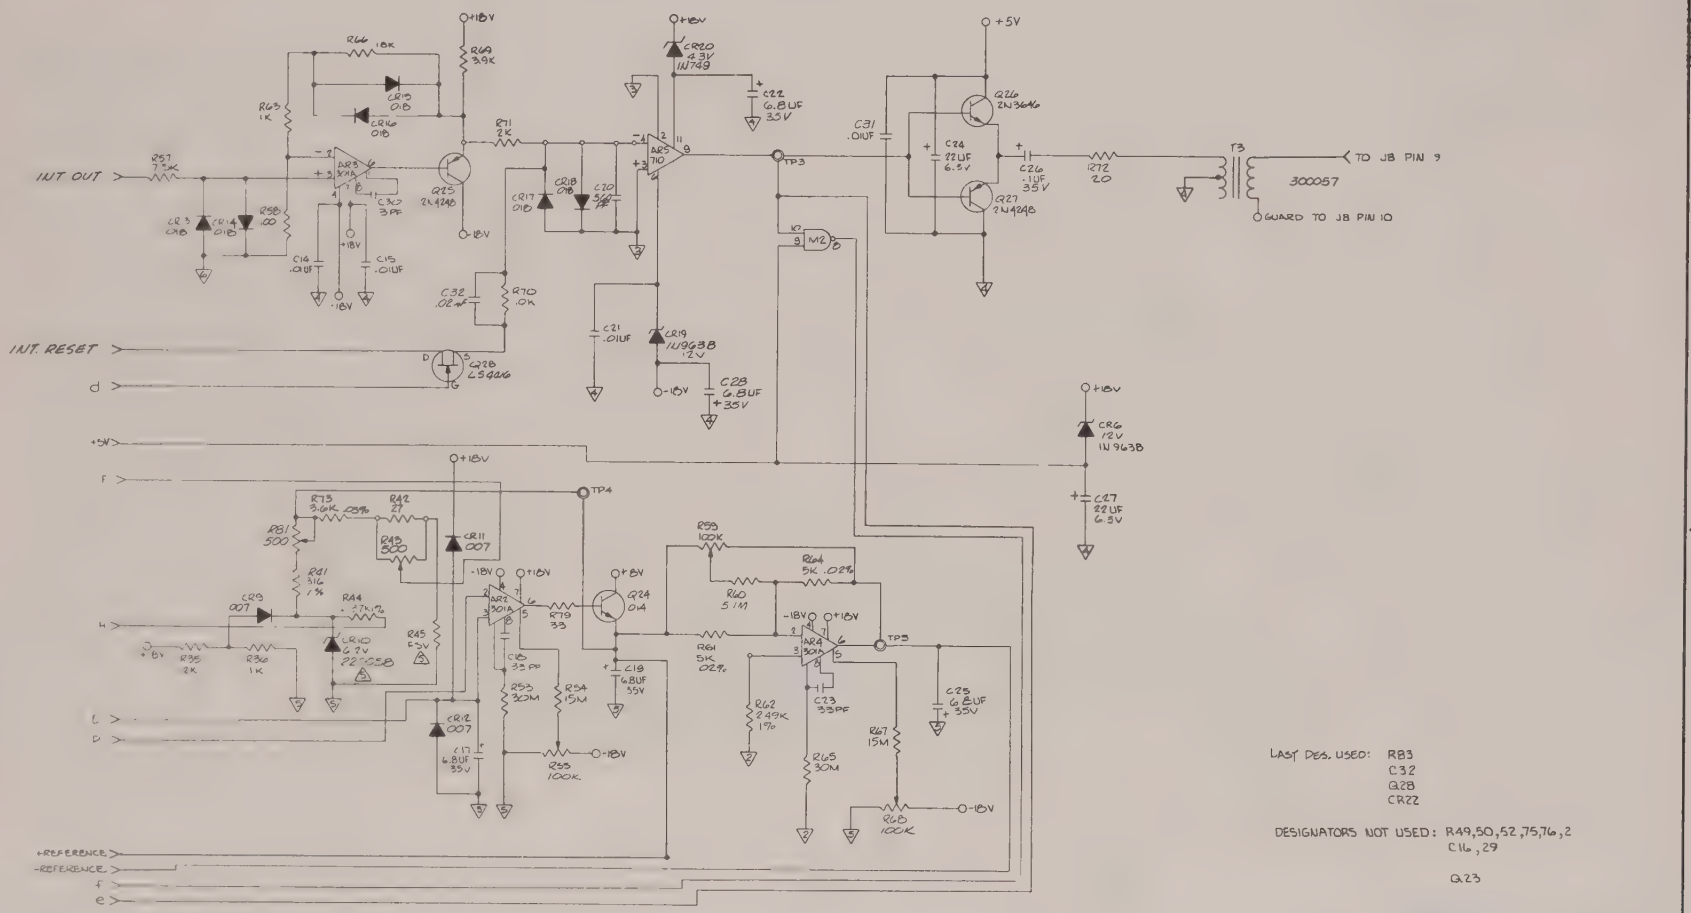

LAST DES. USED: RB3
C32
Q28
CR22

DESIGNATORS NOT USED: R49,50,52,75,76,2
C16,29
Q23

SEE SHEET 1.
NOTES. UNLESS OTHERWISE SPECIFIED

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
DIGITEER 4800

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430949	C

SCALE — SHEET 2 OF 2

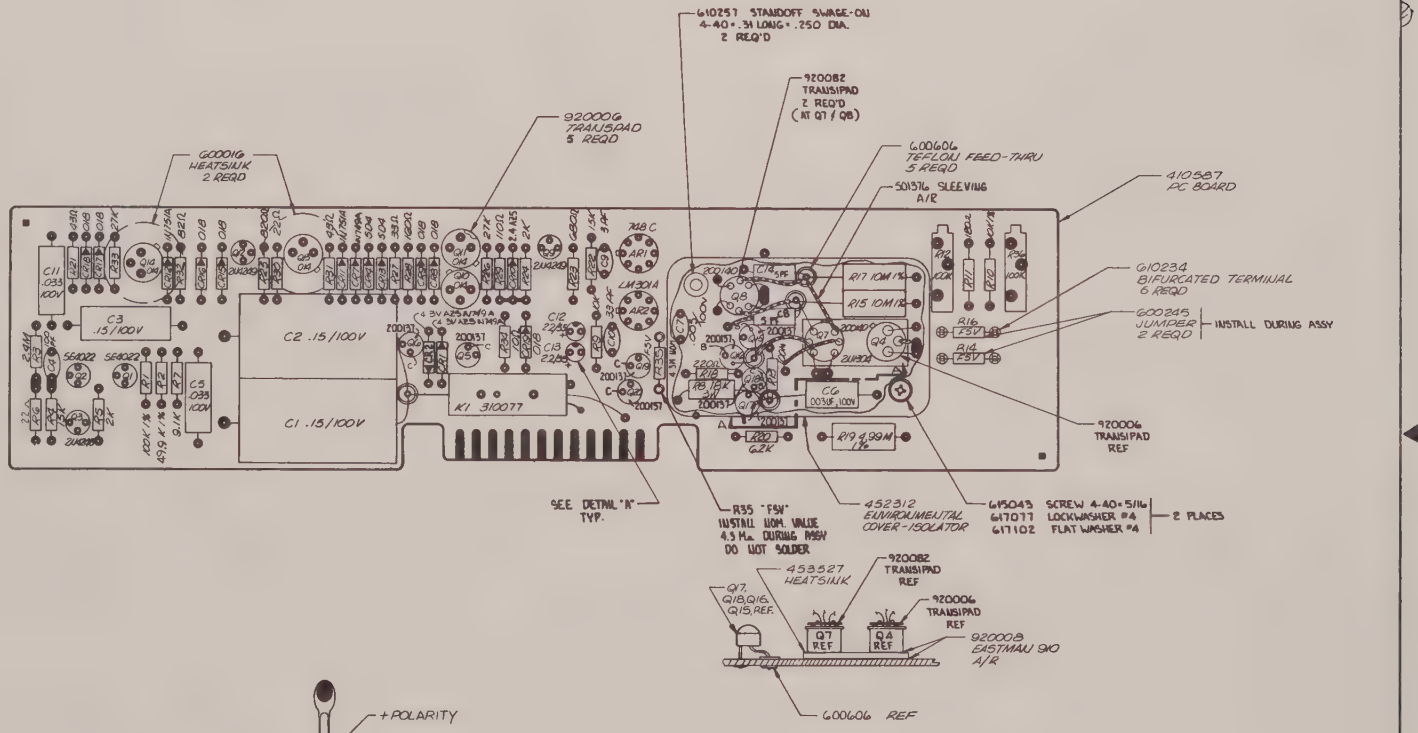
610257 STANDOFF SWAGE-ON 4-40 x .31 LONG x .250 DIA. 2 REQ'D
920082 TRANSIPAD 2 REQ'D (AT Q7 / Q8)
600606 TEFLON FEED-THRU 5 REQ'D
501376 SLEEVING A/R
410587 PC BOARD
600016 HEATSINK 2 REQ'D
920006 TRANSIPAD 5 REQ'D
610234 BIFURCATED TERMINAL 6 REQ'D
600245 JUMPER 2 REQ'D
INSTALL DURING ASSY
920006 TRANSIPAD REF
SEE DETAIL "A" TYP.
R35 "FSV" INSTALL NOM. VALUE 4.5 MΩ DURING ASSY DO NOT SOLDER
452312 ENVIRONMENTAL COVER-ISOLATOR
615043 SCREW 4-40 x 5/16
617077 LOCKWASHER #4
617102 FLAT WASHER #4
2 PLACES
453527 HEATSINK
920082 TRANSIPAD REF
920006 TRANSIPAD REF
920008 EASTMAN 910 A/R
Q7, Q18, Q16, Q15 REF.
Q7 REF
Q4 REF
600606 REF
C2 .15/100V
C1 .15/100V
K1 310077
C3 .15/100V
C11 .033 100V
C14 .033 100V
C6 .003UF, 100V
R17 10M 1%
R15 10M 1%
R19 4.99M 1%
R20 62K
R16 FSV
R14 FSV
AR1
AR2
LM301A
Q8
Q7
Q4
Q5
Q6
C12 2225
C13 2225
C7 4.5M MAX
C8 3PF
C9 3PF
C10 3PF
C15 3PF
C16 3PF
C17 3PF
C18 3PF
C19 3PF
C20 3PF
C21 3PF
C22 3PF
C23 3PF
C24 3PF
C25 3PF
C26 3PF
C27 3PF
C28 3PF
C29 3PF
C30 3PF
C31 3PF
C32 3PF
C33 3PF
C34 3PF

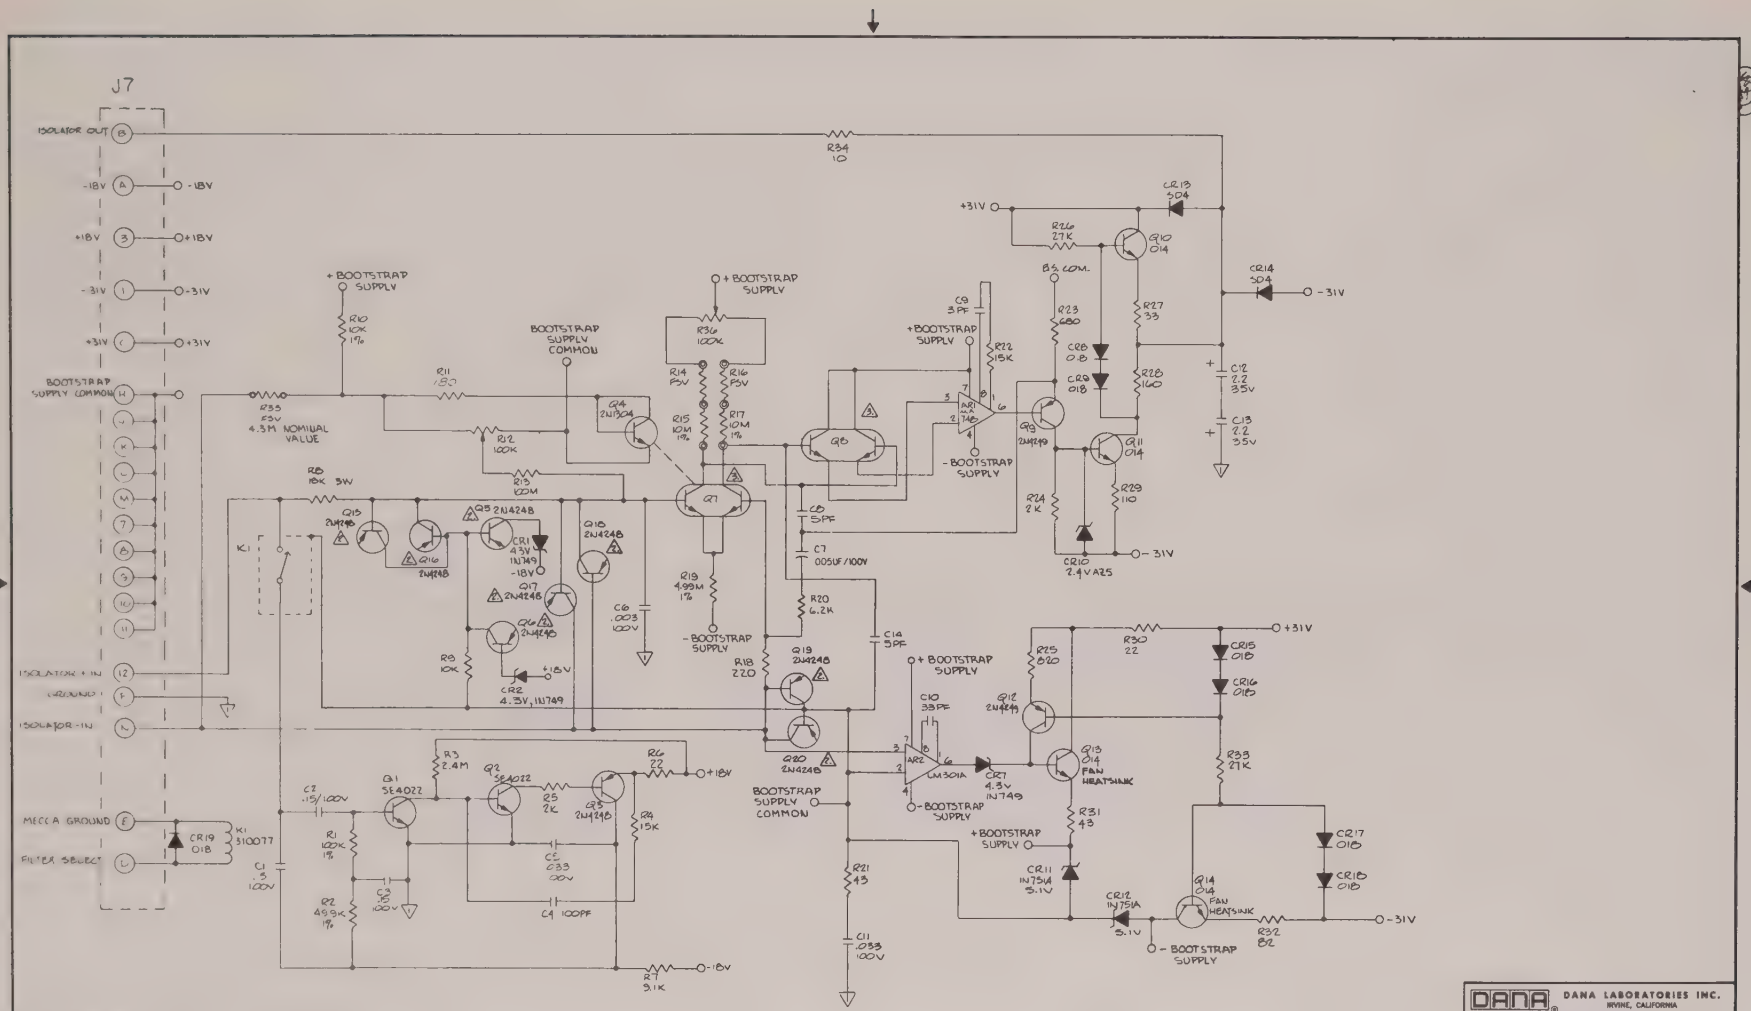

5 ALL RESISTORS ARE IN OHMS, ±5%, 1/4W CARBON.
4 CR3, CR4, CR5 & CR6 NOT USED
⚠ DANA P/N 200140
⚠ DANA P/N 200187
1. LAST DESIGNATORS USED R36, C14, CR19, Q20, K1, & AR2
NOTES UNLESS OTHERWISE SPECIFIED

DANA DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
±20V INPUT ISOLATOR 4800

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	430951	C
SCALE		SHEET	OF

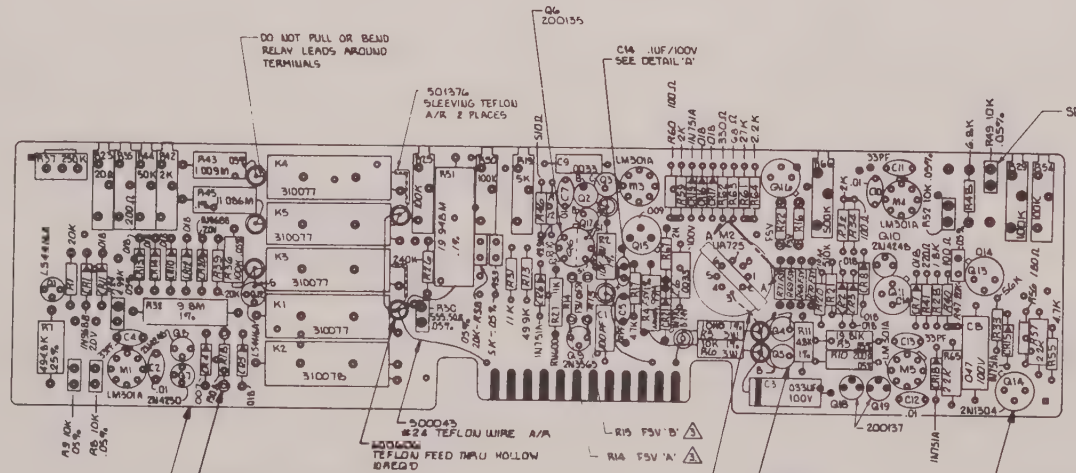
DO NOT PULL OR BEND RELAY LEADS AROUND TERMINALS
501376 SLEEVING TEFLON A/R 2 PLACES
Q6 200135
C14 .1UF/100V SEE DETAIL 'A'
SEE DETAIL 'B'
500043 #24 TEFLON WIRE A/R
500094 TEFLON FEED THRU HOLLOW 10 REQ'D
R19 FSV 'B' 3
R14 FSV 'A' 3
610234 BIFUACATED TERMINAL 10 REQ'D
410586 P.C. BOARD
500096 WIRE 24 GA. A/R FARSIDE
200137 Q2, Q3, Q4 & Q5 CLIP EMITTER LEADS AT CASE
920006 TRANSPAD 5 REQ'D
493569 RETAINER-CUP
453539 BUMPER
920585 CUP
453568 INSULATOR 2 REQ'D
M2 uA 725 (REF)
410646 FLEXIPRINT
410586 P.C. BOARD REFERENCE
600621 PC PIN 8 PLACES
VIEW A-A
EXPLODED
SCALE: NONE
+ POLARITY
DETAIL 'A'
500100 SLEEVING TEFLON A/R
.18 (3/16")
DETAIL 'B'
MOUNT VISHAY RESISTORS R8, R9, R30, R49, & R52 ABOVE PC. BOARD AS SHOWN.

4. SCHEMATIC REFERENCE 450950.

3 IF THE FET, Q6, P/N 200135 IS MARKED 'A' THE 'FSV' RESISTOR IN THE KIT SHOULD BE INSTALLED AT R14 AND THE JUMPER AT R19. IF IT IS MARKED 'B' THE 'FSV' RESISTOR IS INSERTED AT R19 AND THE JUMPER AS R14.

2. _____

_____

_____

1. ASSEMBLY PROCESSES AND PROCEDURES TO CONFORM TO DANA WORKMANSHIP STANDARDS.

NOTES: UNLESS OTHERWISE SPECIFIED.

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

ASSEMBLY
MV OHMS
ACCESSORY

SIZE	CODE IDENT NO	DWG NO.	REV
D	21793	403435	K

SCALE 2:1 SHEET 1 OF 6

SHEETS 2 THRU 6 ARE A SUB

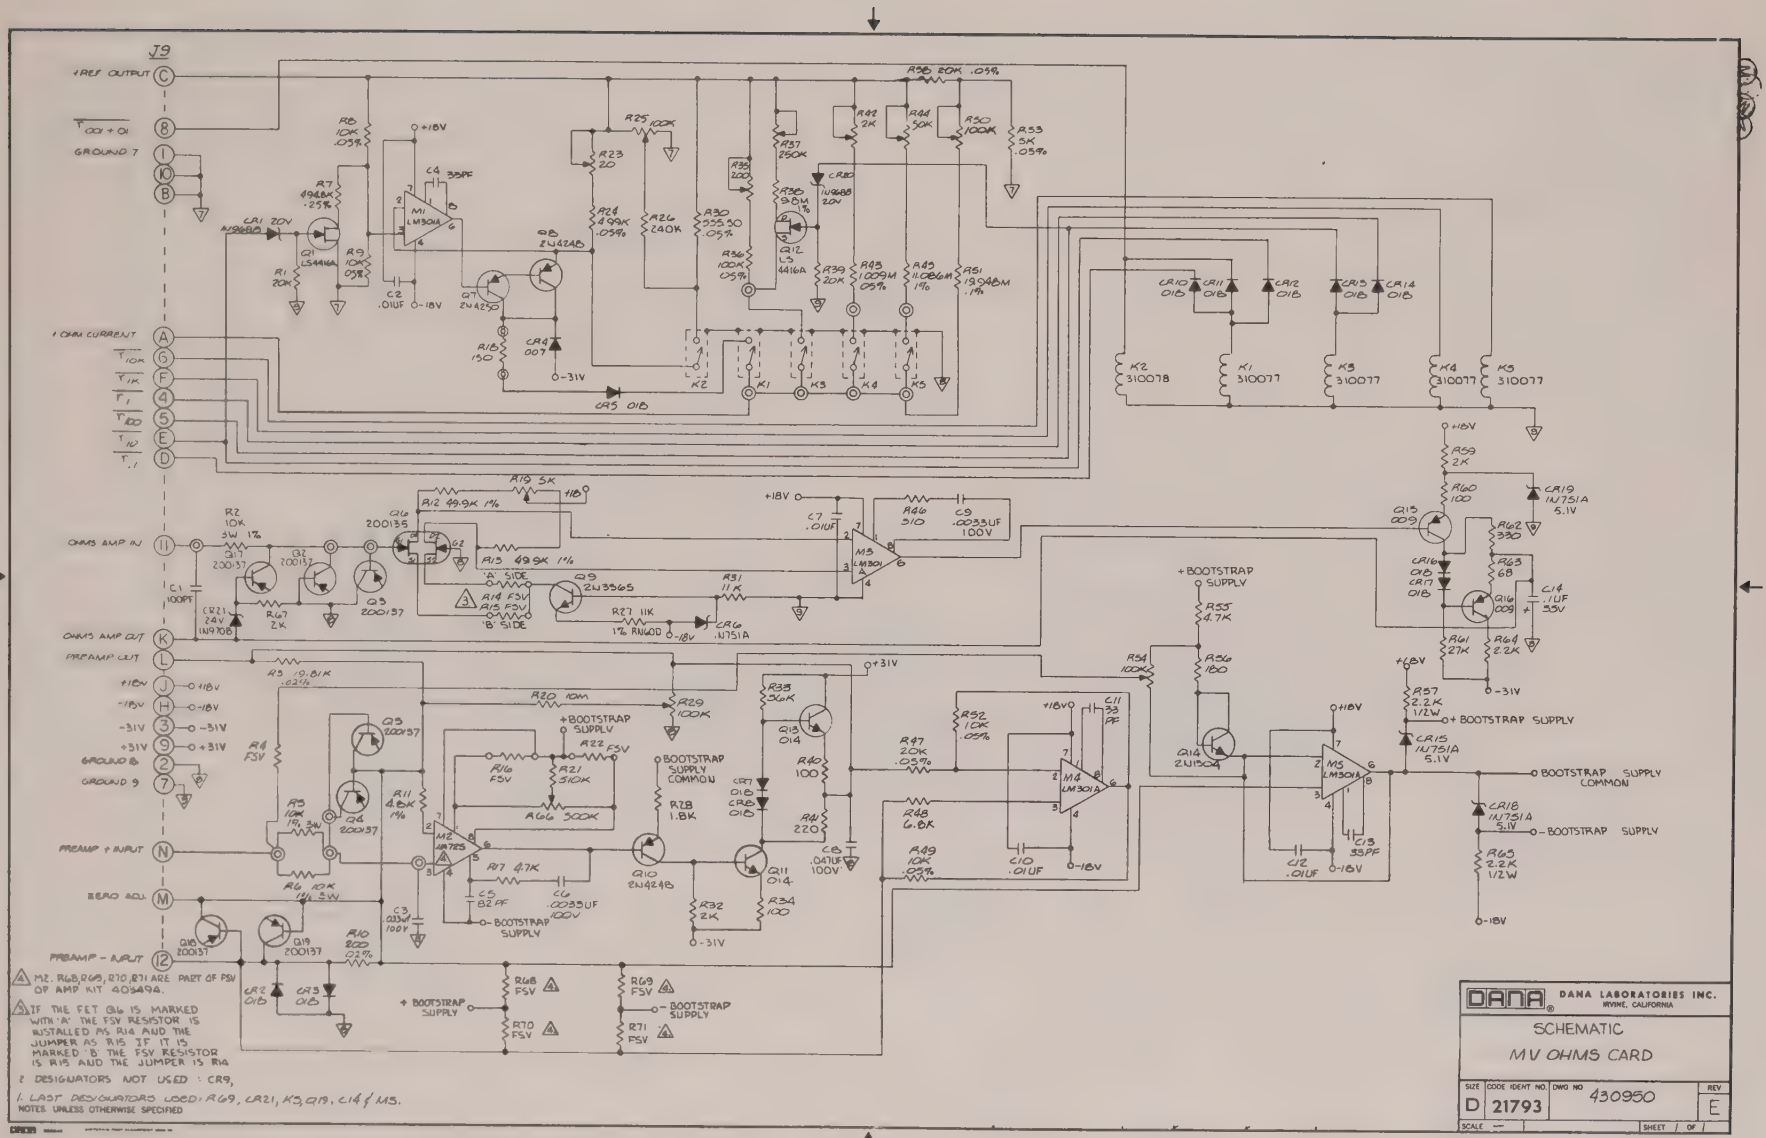

⚠ M2. R68,R69,R70,R71 ARE PART OF FSV OP AMP KIT 403494.

⚠ IF THE FET Q6 IS MARKED WITH 'A' THE FSV RESISTOR IS INSTALLED AS R14 AND THE JUMPER AS R15. IF IT IS MARKED 'B' THE FSV RESISTOR IS R15 AND THE JUMPER IS R14.

2 DESIGNATORS NOT USED : CR9,

1. LAST DESIGNATORS USED: R69, CR21, K5, Q19, C14 & M5.

NOTES: UNLESS OTHERWISE SPECIFIED

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC

MV OHMS CARD

SIZE	CODE IDENT NO.	DWG NO	REV
D	21793	430950	E

SCALE — SHEET / OF /

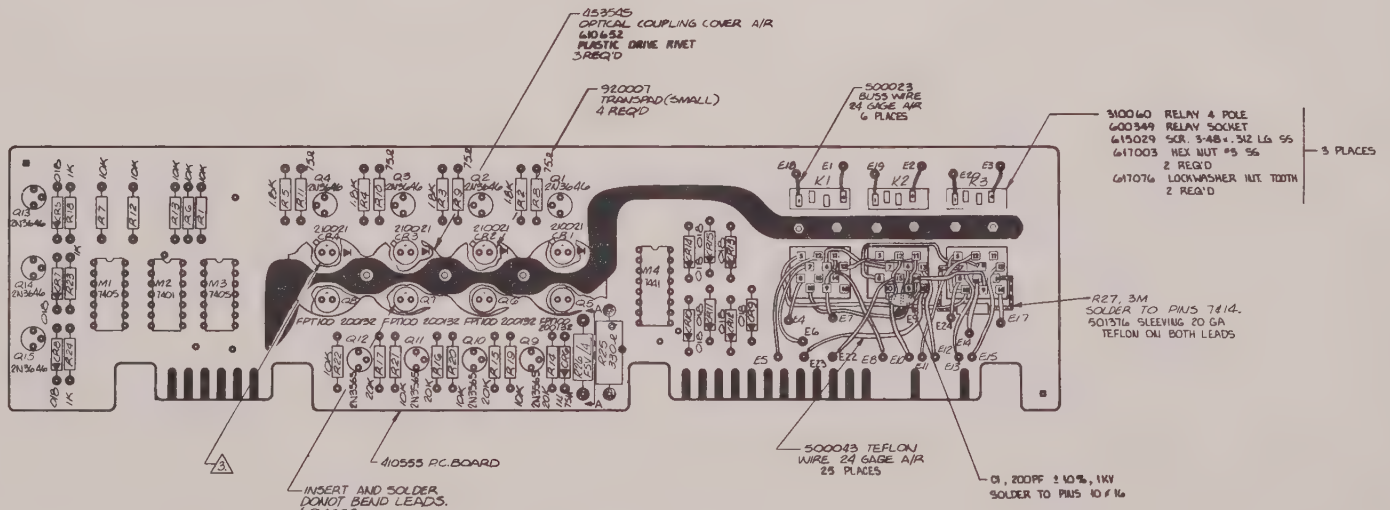
053545 OPTICAL COUPLING COVER A/R
610652 PLASTIC DRIVE RIVET 3 REQ'D
920007 TRANSPAD (SMALL) 4 REQ'D
500023 BUSS WIRE 24 GAGE A/R 6 PLACES
310060 RELAY 4 POLE
600349 RELAY SOCKET
615029 SCR. 3-48 x .312 LG SS
617003 HEX NUT #3 SS
2 REQ'D
617076 LOCKWASHER INT. TOOTH
2 REQ'D
3 PLACES
R27, 3M SOLDER TO PINS 7 & 14. 501376 SLEEVING 20 GA TEFLON ON BOTH LEADS
410555 P.C. BOARD
INSERT AND SOLDER DO NOT BEND LEADS. 4 PLACES
500043 TEFLON WIRE 24 GAGE A/R 23 PLACES
C1, 200PF ± 10%, 1KV SOLDER TO PINS 10 & 16
R26
VIEW A-A

△3 INSTALL 910.1Ω (P/N 001784) 1/2W DURING INITIAL ASSEMBLY

△5 WHEN USING LED'S WITH 3 LEADS DISREGARD TAB ON CASE AND USE 3 HOLE PATTERN ON BOARD.

2. SCHEMATIC REF. NO. 430952.

1. ASSEMBLY PROCESSES AND PROCEDURES TO CONFORM TO DANA WORKMANSHIP STANDARDS.

NOTES: UNLESS OTHERWISE SPECIFIED:

DANA DANA LABORATORIES INC. IRVINE CALIFORNIA

ASSEMBLY SWITCHING CARD

SIZE	CODE IDENT NO	DWG NO	REV
D	21793	403431	F

SCALE 2:1 SHEET 1 OF 3

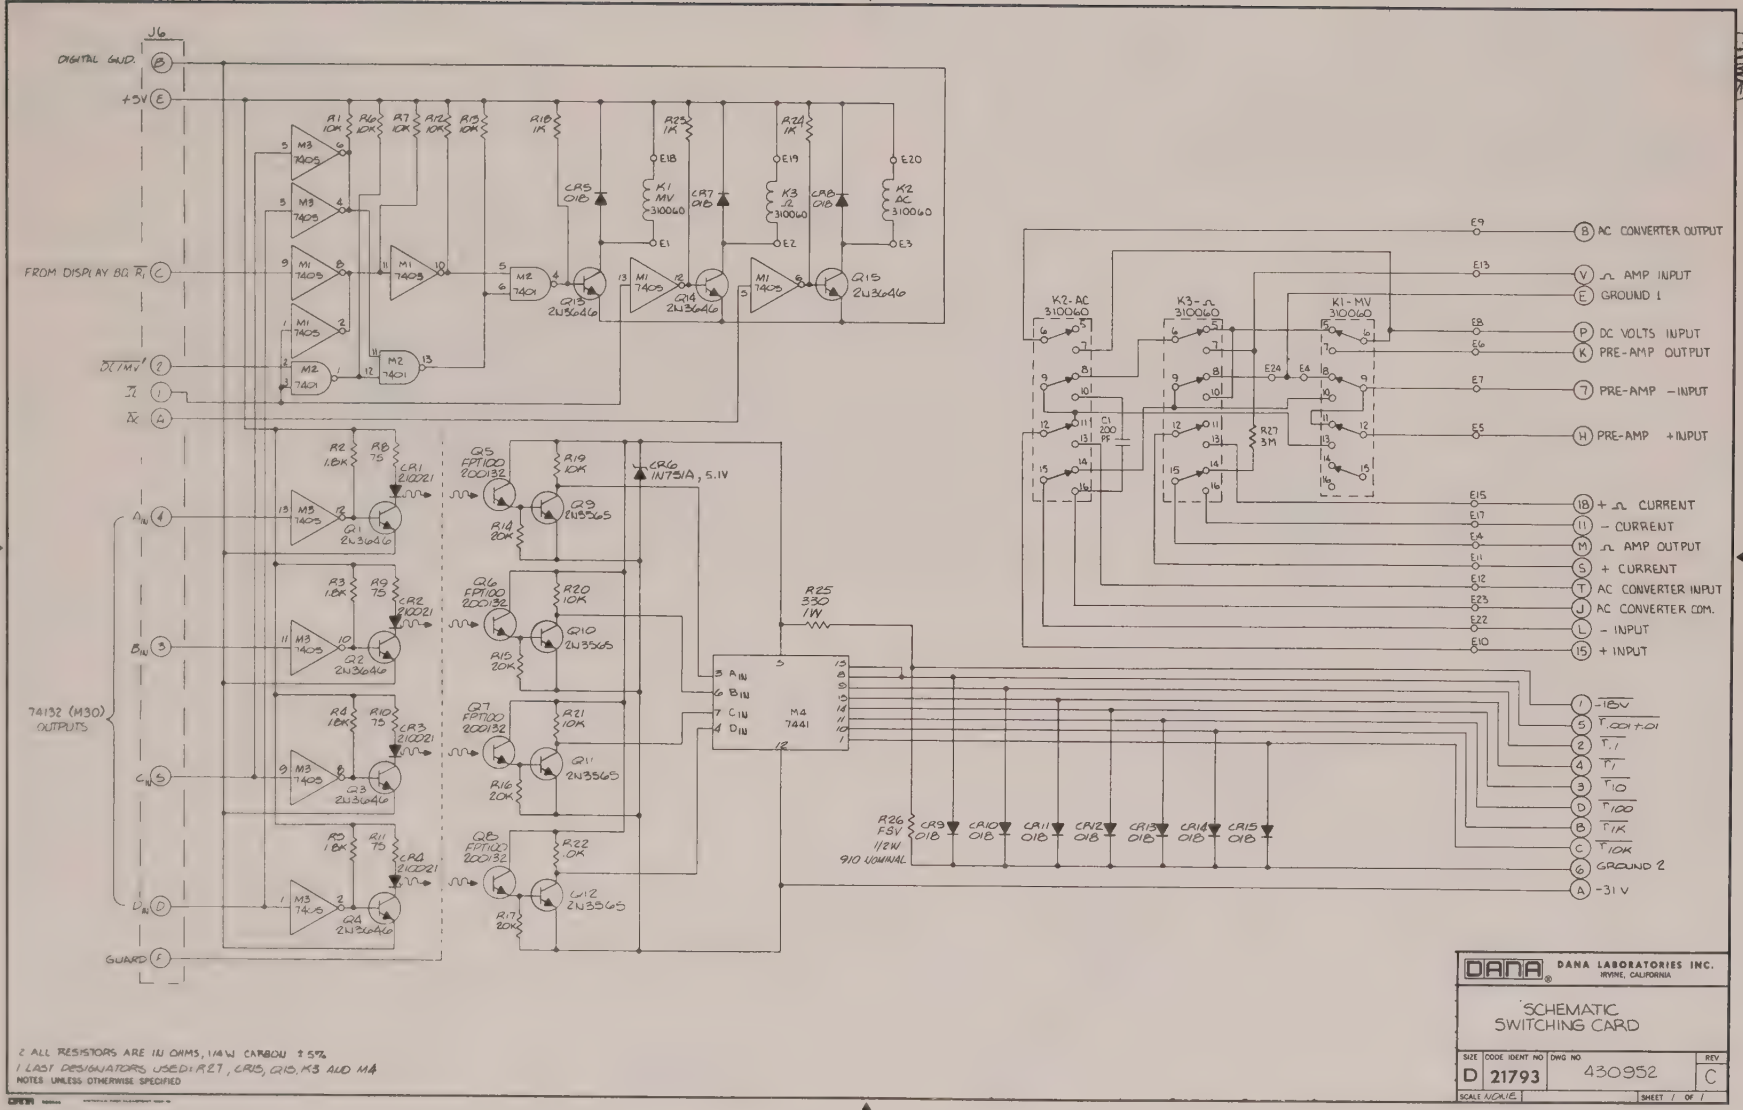

2 ALL RESISTORS ARE IN OHMS, 1/4W CARBON ±5%
1 LAST DESIGNATORS USED: R27, CR15, Q15, K3 AND M4
NOTES UNLESS OTHERWISE SPECIFIED

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
SWITCHING CARD

SIZE	CODE IDENT NO	DWG NO	REV
D	21793	430952	C

SCALE NONE | SHEET 1 OF 1

REVISIONS				
LTR	DESCRIPTION	DR	CHK	APPD
A	RELEASED PER DRN # 595	1/4/71		

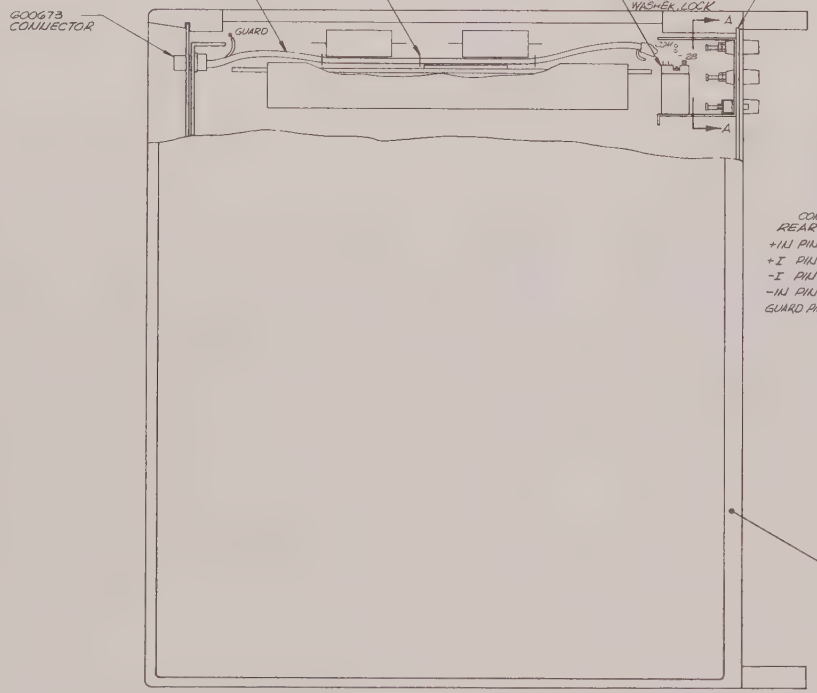

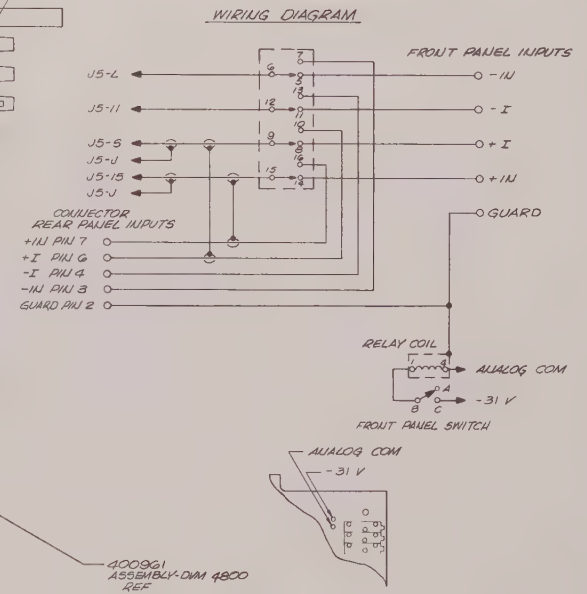

400961
ASSEMBLY-DAN 4800
REF



VIEW A-A

4. USE LOCTITE 920056 ON SCREWS
5. REPLACE WASHER G10G39 WITH G10G15
6. REPLACE PANEL 453492 WITH 453624
1. ASSEMBLY PROCEDURES AND PROCESSES TO CONFORM TO DANA WORKMANSHIP STANDARDS

NOTES UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE THICKNESS OF PLATING

TOLERANCES

DECIMALS	ANGLES	HOLE DIAMETERS
X.030	0° 30'	+.004
XX.020	FORMED	-.001
XXX.010	1° 0"	

DIMENSIONS AND TOLERANCES PER USAS Y14.15

MATERIAL | FINISH

DRAWN		1/14/70	
CHECK		1/14/70	
DESIGN		1/14/70	
MECH ENGR			
PROJ ENGR		1/14/70	
PROD ENGR		1/23/70	

NEXT DWG	USED ON	NEXT ASSY
	4800	
APPLICATION		QTY REQD

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

ACCESSORY ASSY REAR INPUT-4800

SIZE	CODE IDENT NO	DWG NO	REV
D	21793	403502	A

SCALE 1/2/1/1 | SHEET 1 OF 2

SHT 2 IS AN 'A' SIZE

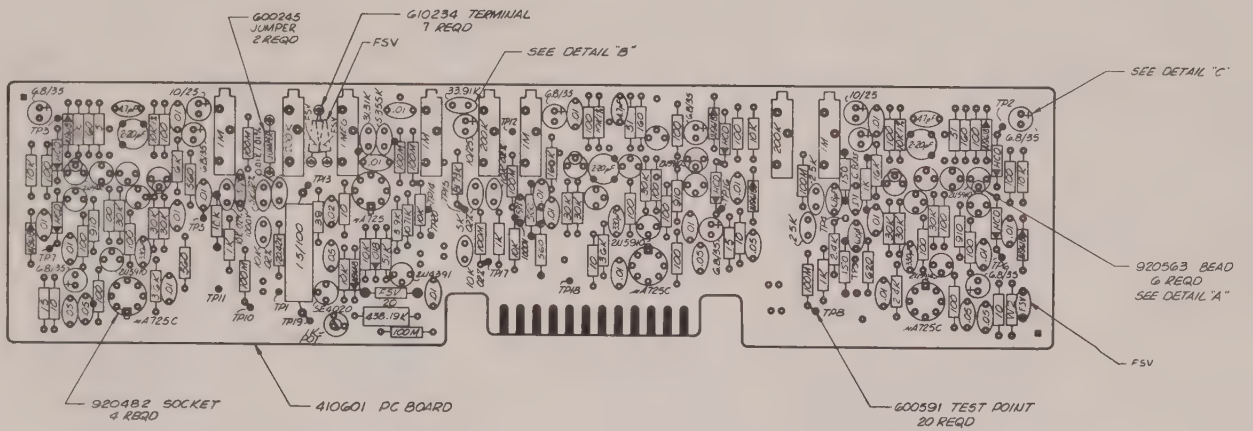



DETAIL A

6 PLACES

DETAIL B

MOUNT VISHAY RESISTORS R1, R2, R6, R7, R8, R27, R70, R72, R73 R78, R79, R82 ABOVE PC BOARD AS SHOWN

DETAIL C

4. MCD IS 210035 P/N
3. ALL TRANSISTORS THAT DO NOT HAVE A VALUE CALLED OUT ARE SE3005
2. ASSEMBLY PROCEDURES AND PROCESSES TO CONFORM TO DANA WORKMANSHIP STANDARDS
1. REF SCHEMATIC 430964

NOTES : UNLESS OTHERWISE SPECIFIED

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

A C CONVERTER ASSEMBLY

SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	403470	D

SCALE 2:1 SHEET 1 OF 7

SHEETS 3 THRU 7 DES A 5-68 P/L

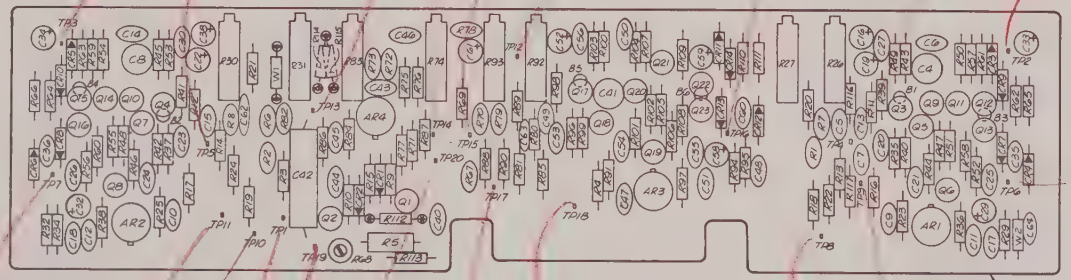

2. ASSEMBLY PROCEDURES AND PROCESSES TO CONFORM TO DANA WORKMANSHIP STANDARDS
1. REF SCHEMATIC 430964

NOTES: UNLESS OTHERWISE SPECIFIED

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

AC CONVERTER ASSEMBLY

SIZE	CODE IDENT NO	DWG NO	REV.
D	21793	403470	D

SCALE 2/1 SHEET 2 OF 7

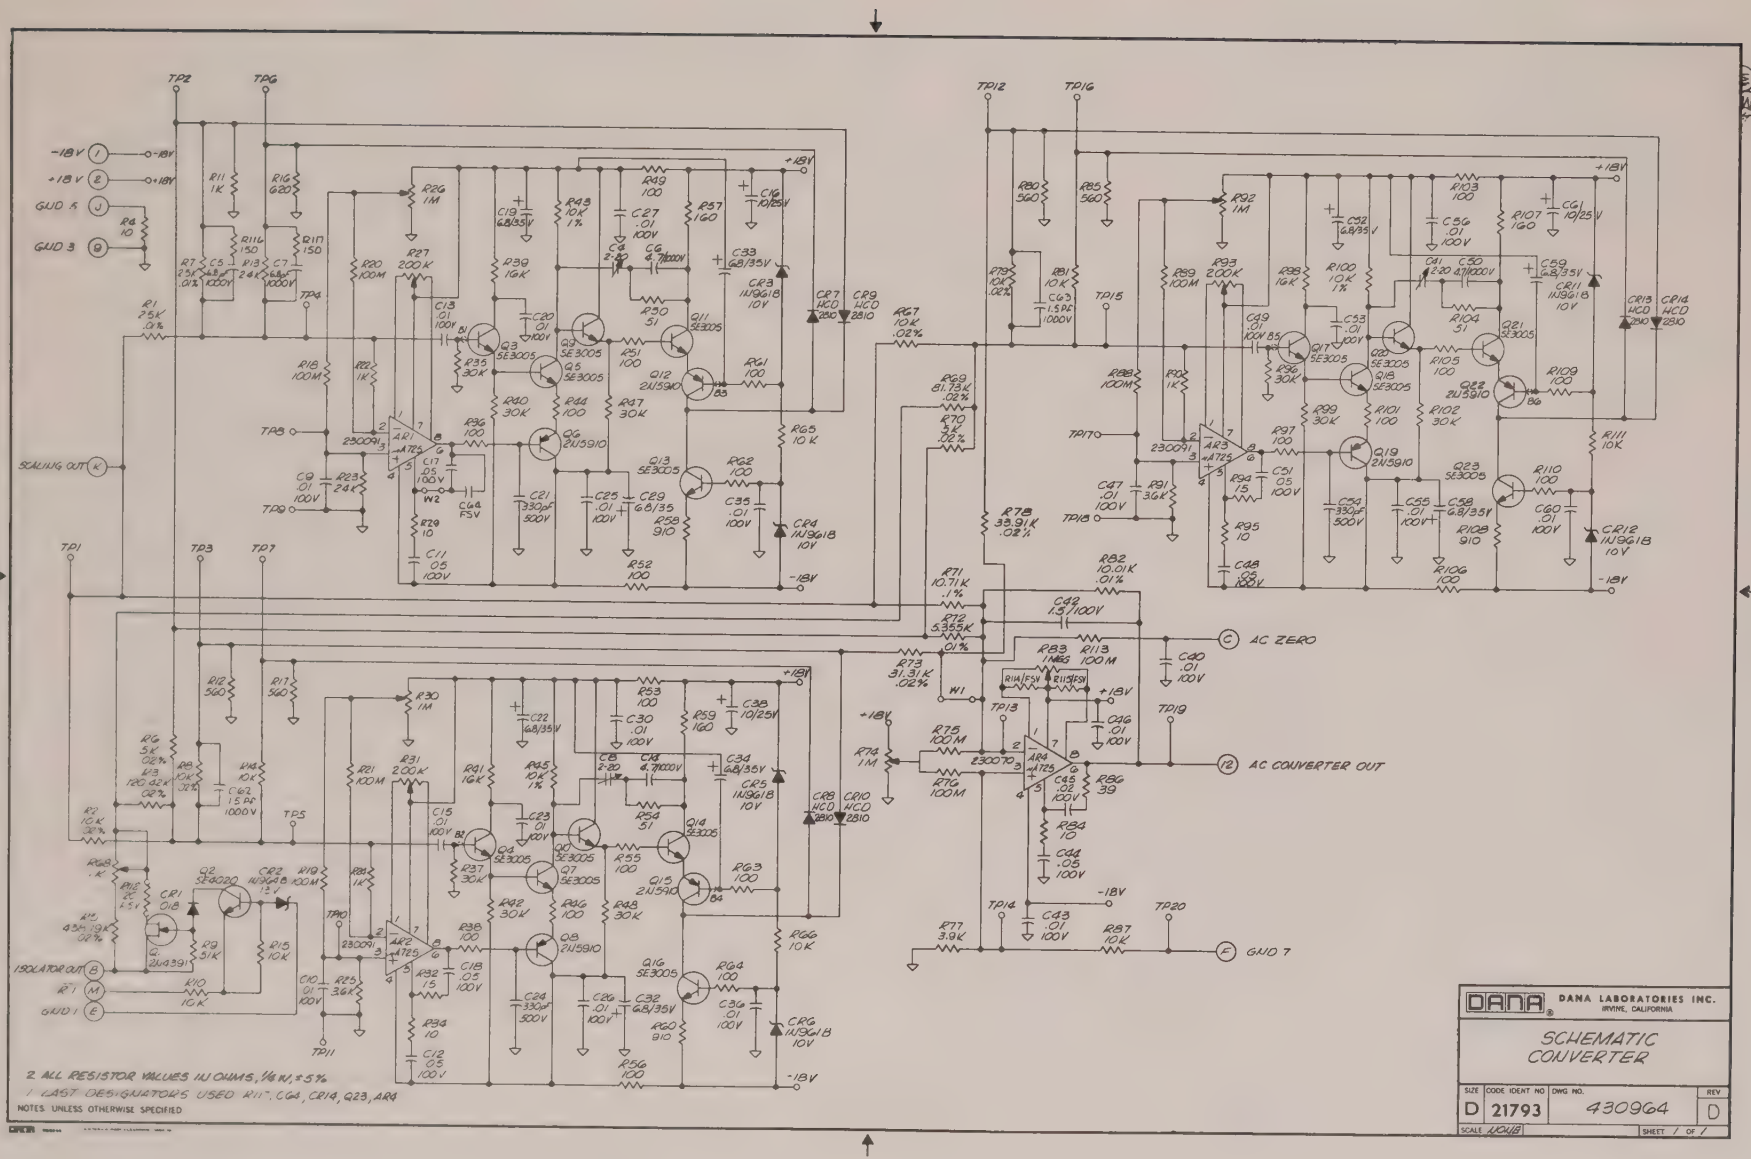
-18V
+18V
GND A
GND B
SCALING OUT
ISOLATOR OUT
GND I
AC ZERO
AC CONVERTER OUT
GND 7
NOTES UNLESS OTHERWISE SPECIFIED
1. ALL RESISTOR VALUES IN OHMS, 1/4 W, ±5%
2. LAST DESIGNATORS USED R117, C68, CR14, Q23, AR4
DANA LABORATORIES INC.
IRVINE, CALIFORNIA
SCHEMATIC
CONVERTER
SIZE D
CODE IDENT NO 21793
DWG NO. 430964
REV D
SCALE NONE
SHEET 1 OF 1

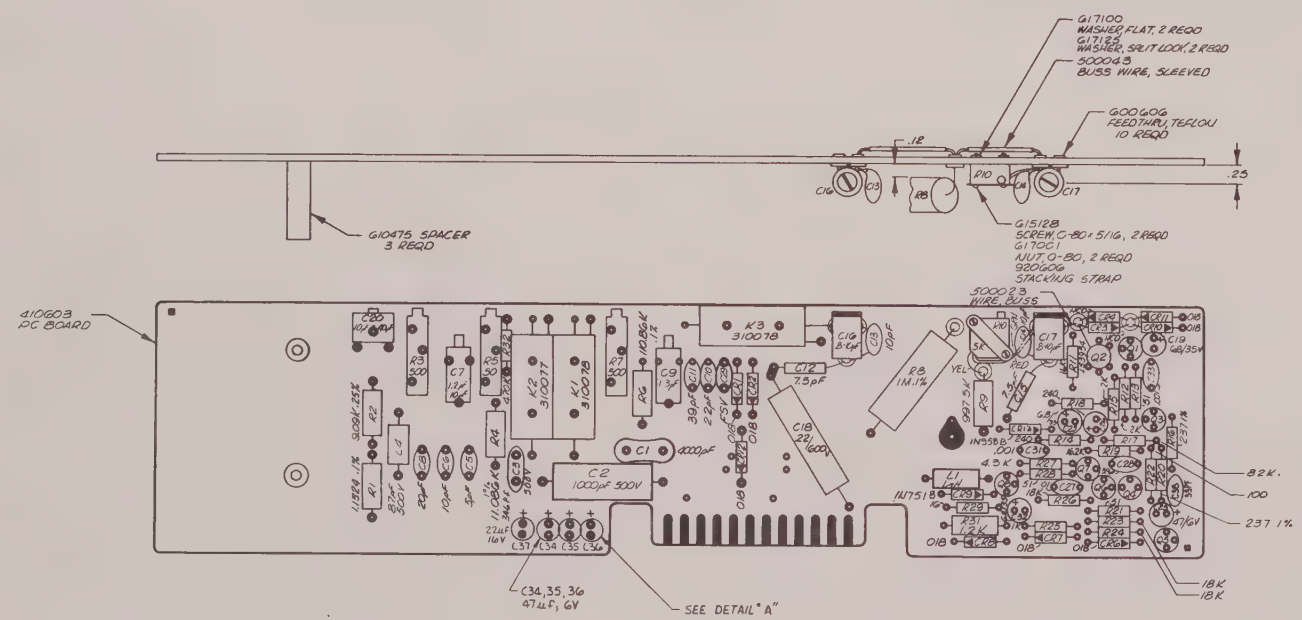

DETAIL "A"

NOTES · UNLESS OTHERWISE SPECIFIED

1 ASSEMBLY PROCESSES & PROCEDURES TO CONFORM TO DANA WORKMANSHIP STANDARDS

2. SCHEMATIC REF #430964

3. Q1, Q3, Q4, Q5, Q6, Q7 & Q8 ARE SE3005

4. HCD IS 210035 P/N

DANA® DANA LABORATORIES INC. IRVINE, CALIFORNIA			
SCALING AMP ASSEMBLY			
SIZE	CODE IDENT NO.	DWG NO.	REV
D	21793	403472	E
SCALE 8/1		SHEET 1 OF 5	

SHEETS 2 THRU 5 ARE A SIZE

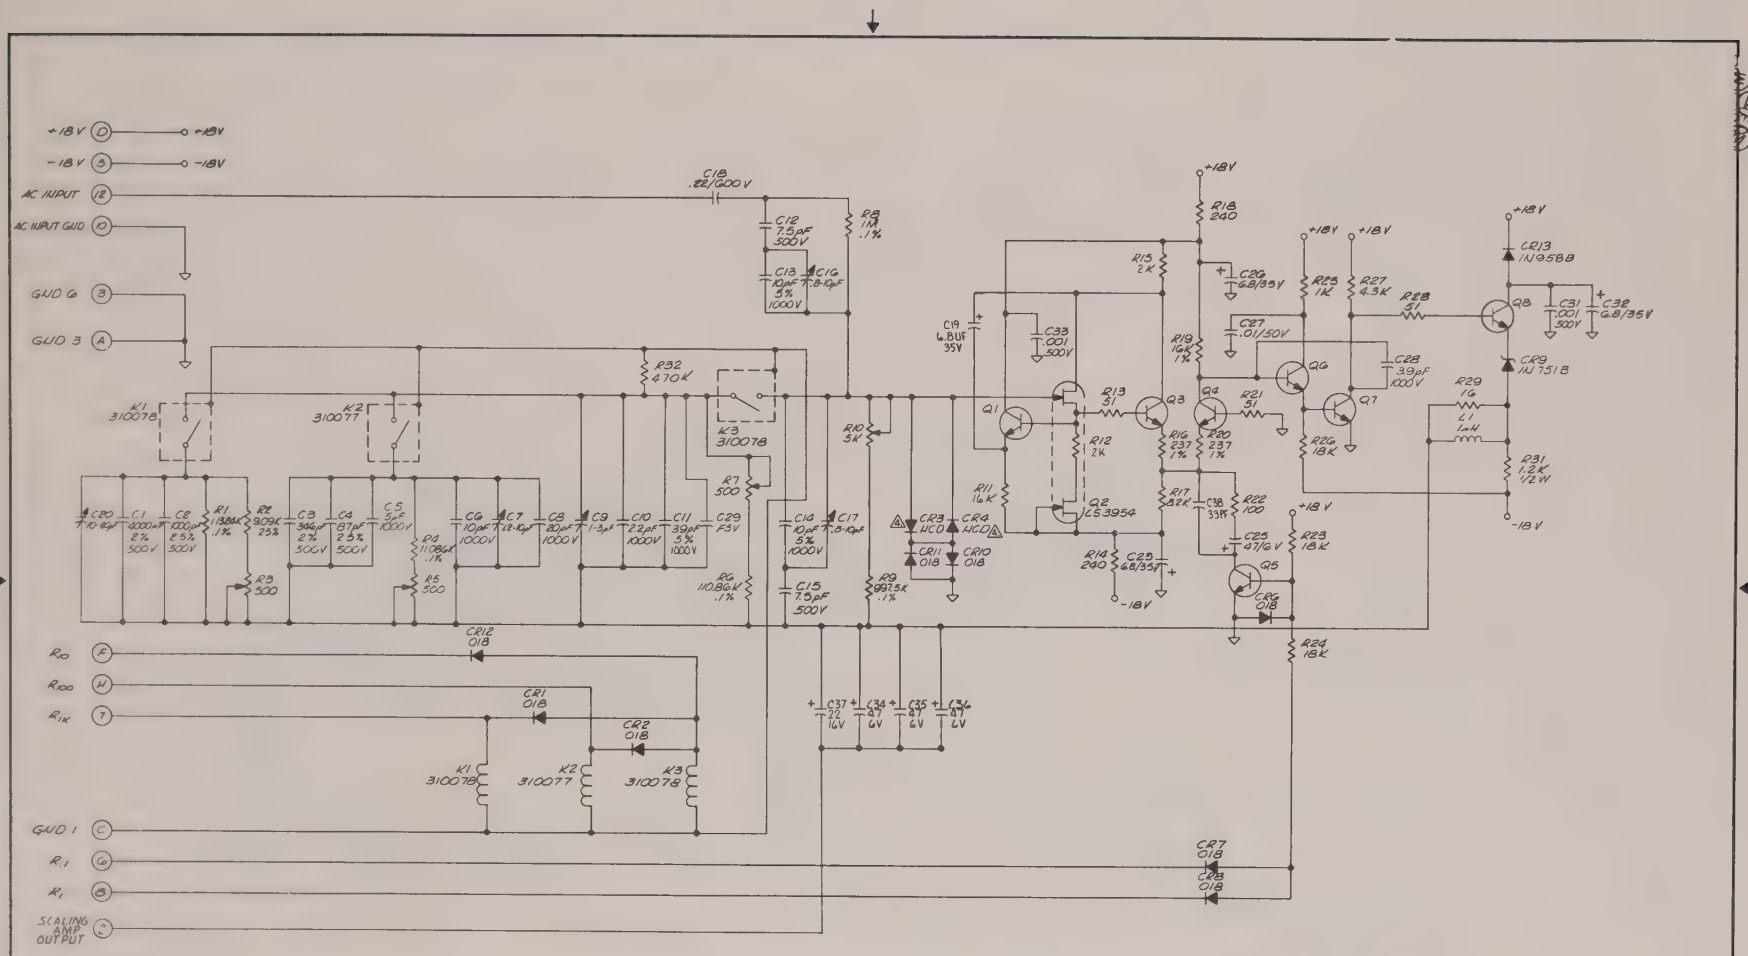

⚠ HCD IS AMI 210035
3. TRANSISTORS Q1,Q3,Q4,Q5,Q6,Q7 & Q8 ARE SE3005
2. ALL RESISTOR VALUE IN OHMS, 1/8 W, ± 5%
1. LAST DESIGNATORS USED R32, C38, CR13, Q8, K3
NOTES UNLESS OTHERWISE SPECIFIED

DANA DANA LABORATORIES INC.
IRVINE, CALIFORNIA

SCHEMATIC
SCALING AMP

SIZE	CODE IDENT NO	DWG NO	REV
D	21793	430966	D

SCALE NONE SHEET 1 OF 1

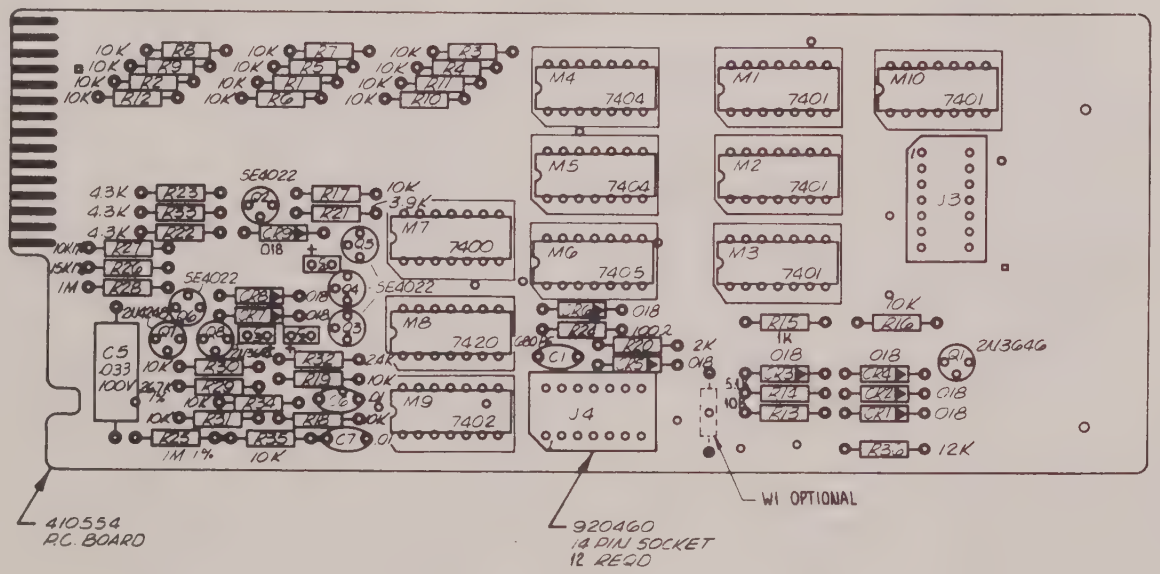

3. C2-.47/50V, C3-.22/50V, C4-.27/50V
2. SCHEMATIC REFERENCE 430959
1. ASSEMBLY PROCESSES AND PROCEDURES TO CONFORM TO DANA WORKMANSHIP STANDARDS

NOTES: UNLESS OTHERWISE SPECIFIED

DANA LABORATORIES INC.
IRVINE, CALIFORNIA

ASSEMBLY PROGRAMMING BOARD

SIZE	CODE IDENT NO	DWG NO.	REV
C	21793	403436	D
SCALE 2:1		SHEET 1 OF 3	

With 2 & 3 Are A size

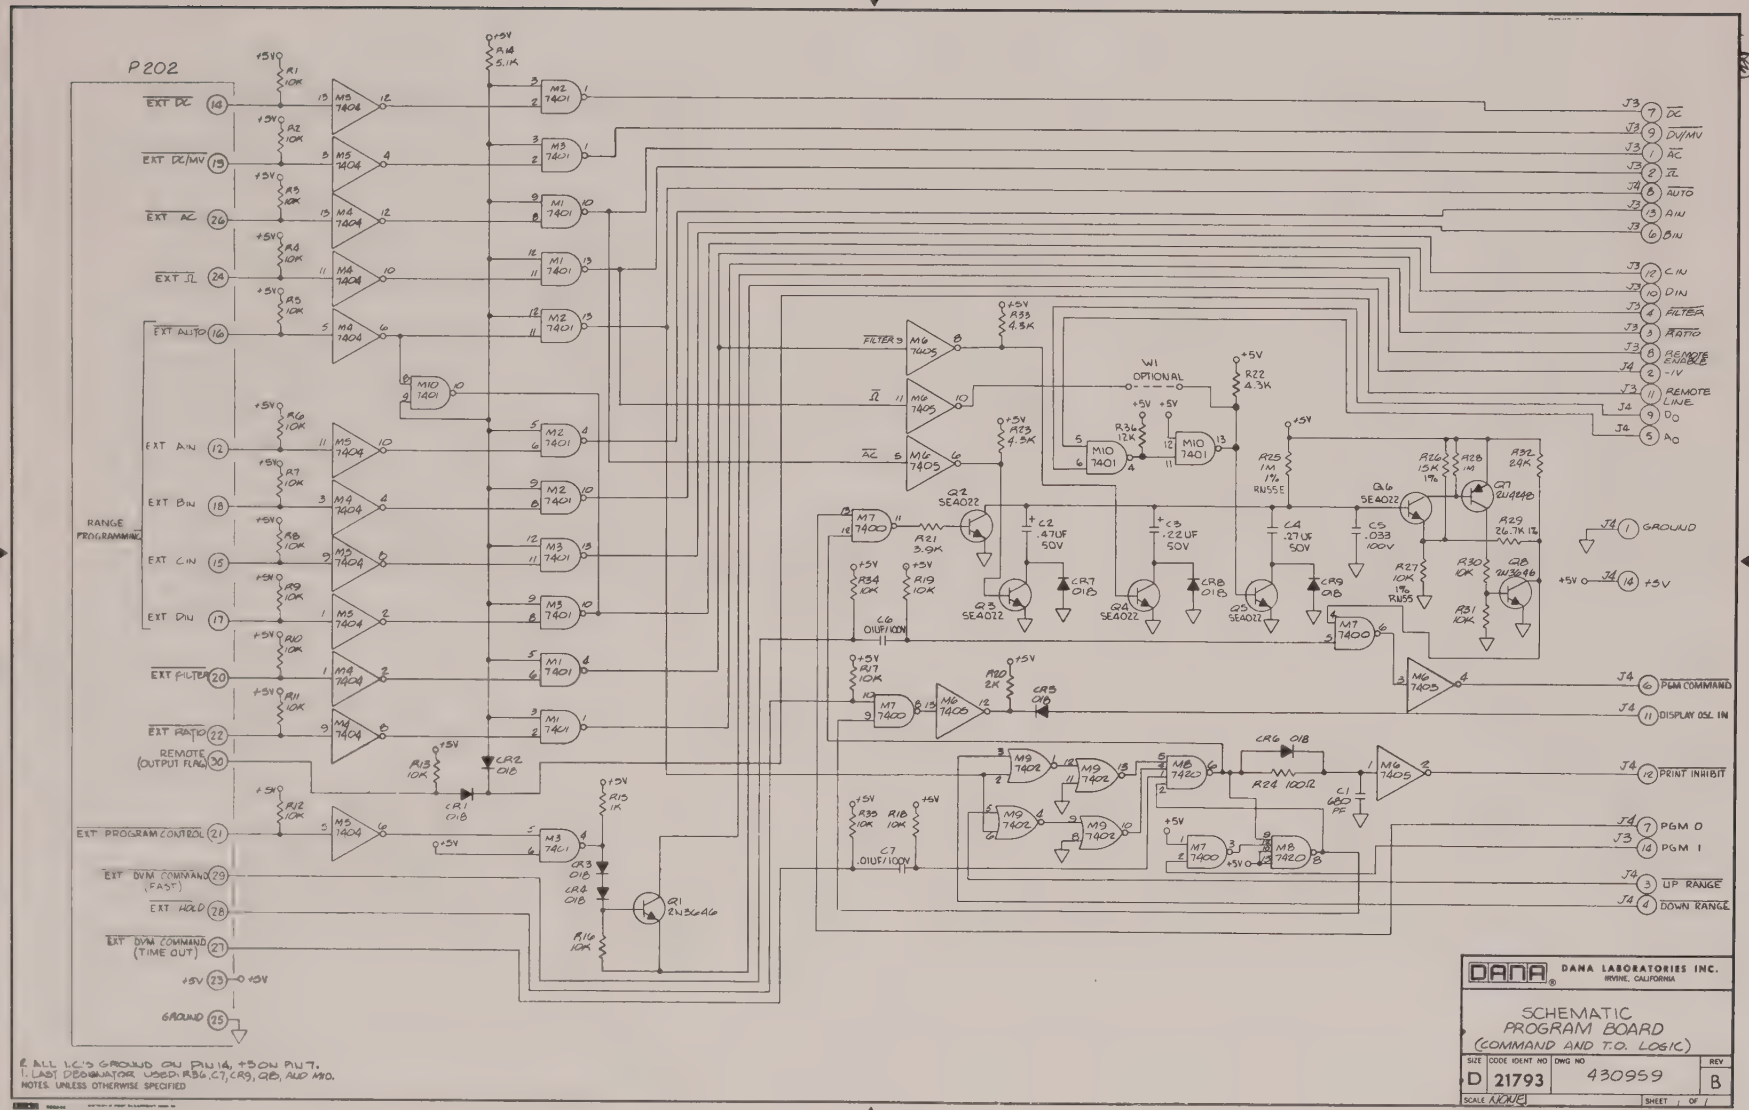

NOTES. UNLESS OTHERWISE SPECIFIED
1. LAST DESIGNATOR USED: RB6, C7, CR9, Q8, AND M10.
2. ALL IC'S GROUND ON PIN 14, +5V ON PIN 7.

DANA DANA LABORATORIES INC. IRVINE, CALIFORNIA

SCHEMATIC
PROGRAM BOARD
(COMMAND AND T.O. LOGIC)

SIZE	CODE IDENT NO	DWG NO	REV
D	21793	430959	B

SCALE NONE SHEET OF

PARTS LIST

ASSEMBLY 403433 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION			
CR01	211083	DIODE SILICO	018	DANA	211083
CR02	211083	DIODE SILICO	018	DANA	211083
CR03	211083	DIODE SILICO	018	DANA	211083
CR04	210021	DIODE		DANA	210021
CR04	920007	TRANSISTOR PAD		M-R	10045
CR05	210021	DIODE		DANA	210021
CR05	920007	TRANSISTOR PAD		M-R	10045
CR06	211083	DIODE SILICO	018	DANA	211083
CR07	211083	DIODE SILICO	018	DANA	211083
CR08	211083	DIODE SILICO	018	DANA	211083
CR09	211083	DIODE SILICO	018	DANA	211083
CR10	211083	DIODE SILICO	018	DANA	211083
CR11	211083	DIODE SILICO	018	DANA	211083
CR12	211083	DIODE SILICO	018	DANA	211083
CR13	211083	DIODE SILICO	018	DANA	211083
CR14	211083	DIODE SILICO	018	DANA	211083
CR15	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR16	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR17	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR18	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR19	220015	DIODE SILICO ZENER	1N967B	MOTOROLA	1N967B
CR20	211083	DIODE SILICO	018	DANA	211083
CR21	211083	DIODE SILICO	018	DANA	211083
CR22	220015	DIODE SILICO ZENER	1N967B	MOTOROLA	1N967B
CR23	211083	DIODE SILICO	018	DANA	211083
CR24	220007	DIODE SILICO ZENER	1N751	MOTOROLA	1N751
CR25	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR26	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR27	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR28	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR29	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR30	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR31	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR32	220007	DIODE SILICO ZENER	1N751	MOTOROLA	1N751
CR33	211083	DIODE SILICO	018	DANA	211083

PARTS LIST

ASSEMBLY 403433 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
CR34	220040	DIODE ZENER					SEMCOR	1N753
CR35	211083	DIODE SILICO	018				DANA	211083
C01	101145	CAP	CERAM	100 PFD	500 V	10%	AERCVOX	SCD1X5F
C02	101099	CAP	CERAM	680 PFD	500 V	10%	AERCVCX	SCD2X5F
C03	110071	CAP	ELECT	.1 MFD	35 V	10%	KEMET	K1W35K
C04	110129	CAP	TANTA	.1MF	35V		ITT	4321217010
C05	110129	CAP	TANTA	.1MF	35V		ITT	4321217010
C06	110067	CAP	ELECT	2000 MFD	35 V	20%	DUCATI	2000-35
C07	110067	CAP	ELECT	2000 MFD	35 V	20%	DUCATI	2000-35
C08	110036	CAP	ELECT	25 MFD	50 V	20%	DUCATI	25-50
C09	110036	CAP	ELECT	25 MFD	50 V	20%	DUCATI	25-50
C10	110036	CAP	ELECT	25 MFD	50 V	20%	DUCATI	25-50
C11	110036	CAP	ELECT	25 MFD	50 V	20%	DUCATI	25-50
C18	110069	CAP	ELEC	10 MFD	10 V		KEMET	K10W10K
C19	110127	CAP	TANT	22 MFD	6.3 V		ITT	43212 12222
C20	101642	CAP	CERAM	150 PFD	500 V	10%	AERCVOX	SCD2X5F
C21	100012	CAP	CERAM	33 PFD	500 V	10%	AERCVOX	TCD-N750
C22	100008	CAP	CERAM	82 PFD	500 V	10%	AERCVOX	TCD-N750
C23	110128	CAP		6000 MFD	10 V		SPRGUE36D602G010AA2A	
C24	110127	CAP	TANT	22 MFD	6.3 V		ITT	43212 12222
C25	110127	CAP	TANT	22 MFD	6.3 V		ITT	43212 12222
J01	453505	CONN 12 P					CINCH	252-12-30-160
J02	600280	CONN 12 P					CINCH	252-12-30-
J03	920460	INTEGRATED CIRCUIT					AUGAT	314AG5D-2R
J04	920460	INTEGRATED CIRCUIT					AUGAT	314AG5D-2R
J05	600228	CONN 18 P					CINCH	252-18-30-160
J06	600671	CONN					CINCH	50-12B-10
J07	600280	CONN 12 P					CINCH	252-12-30-
J08	600670	CONN 10 P					CINCH	50-20B-10
J09	600280	CONN 12 P					CINCH	252-12-30-
J11	600280	CONN 12 P					CINCH	252-12-30-
J12	600280	CONN 12 P					CINCH	252-12-30-
K01	310063	RELAY		150 OHM			P & B	R10E1221-1
K02	310063	RELAY		150 OHM			P & B	R10E1221-1

PARTS LIST

ASSEMBLY 403433 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION			
K03	310063	RELAY	150 OHM	P & B	R10E1221-1
K04	310076	RELAY	28 V	P & B	R10E-1297-2
L01	310062	CHOKE	22 UH	DELEVAN	1537-44
M01	230034	INTEGRATED CIRCUIT		TI	SN7441N
M01	920419	INTEGRATED CIRCUIT	SOCKET - 16 PIN	AUGAT	316AG5D-2R
M02	230034	INTEGRATED CIRCUIT		TI	SN7441N
M03	230034	INTEGRATED CIRCUIT		TI	SN7441N
M04	230034	INTEGRATED CIRCUIT		TI	SN7441N
M04	920419	INTEGRATED CIRCUIT	SOCKET - 16 PIN	AUGAT	316AG5D-2R
M05	230038	INTEGRATED CIRCUIT		TI	SN74H11N
M05	920460	INTEGRATED CIRCUIT		AUGAT	314AG5D-2R
M06	230028	INTEGRATED CIRCUIT		TI	SN7400N
M06	920460	INTEGRATED CIRCUIT		AUGAT	314AG5D-2R
M07	230065	INTEGRATED CIRCUIT		TI	SN7475N
M07	920419	INTEGRATED CIRCUIT	SOCKET - 16 PIN	AUGAT	316AG5D-2R
M08	230065	INTEGRATED CIRCUIT		TI	SN7475N
M09	230065	INTEGRATED CIRCUIT		TI	SN7475N
M10	230065	INTEGRATED CIRCUIT		TI	SN7475N
M10	920419	INTEGRATED CIRCUIT	SOCKET - 16 PIN	AUGAT	316AG5D-2R
M11	230030	INTEGRATED CIRCUIT		TI	SN7402N
M11	920460	INTEGRATED CIRCUIT		AUGAT	314AG5D-2R
M12	230035	INTEGRATED CIRCUIT		TI	SN7473N
M13	230037	INTEGRATED CIRCUIT		TI	SN7490N
M14	230037	INTEGRATED CIRCUIT		TI	SN7490N
M15	230037	INTEGRATED CIRCUIT		TI	SN7490N
M16	230037	INTEGRATED CIRCUIT		TI	SN7490N
M17	230028	INTEGRATED CIRCUIT		TI	SN7400N
M18	230030	INTEGRATED CIRCUIT		TI	SN7402N
M19	230072	INTEGRATED CIRCUIT		TI	SN7474N
M20	230035	INTEGRATED CIRCUIT		TI	SN7473N
M21	230028	INTEGRATED CIRCUIT		TI	SN7400N
M22	230063	INTEGRATED CIRCUIT		TI	SN7440N
M23	230029	INTEGRATED CIRCUIT		TI	SN7401N
M24	230064	INTEGRATED CIRCUIT		TI	SN7404N
M25	230030	INTEGRATED CIRCUIT		TI	SN7402N

PARTS LIST

ASSEMBLY 403433 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION		
M26	230072	INTEGRATED CIRCUIT	TI	SN7474N
M27	230031	INTEGRATED CIRCUIT	TI	SN7410N
M28	230064	INTEGRATED CIRCUIT	TI	SN7404N
M28	920460	INTEGRATED CIRCUIT	AUGAT	314AG5D-2R
M29	230036	INTEGRATED CIRCUIT	TI	SN7483N
M29	920419	INTEGRATED CIRCUIT SOCKET - 16 PIN	AUGAT	316AG5D-2R
M30	230067	INTEGRATED CIRCUIT	TI	SN74192
M31	230036	INTEGRATED CIRCUIT	TI	SN7483N
M31	920419	INTEGRATED CIRCUIT SOCKET - 16 PIN	AUGAT	316AG5D-2R
M32	230028	INTEGRATED CIRCUIT	TI	SN7400N
M32	920460	INTEGRATED CIRCUIT	AUGAT	314AG5D-2R
Q01	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q02	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q03	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q04	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q05	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q06	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q07	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q08	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q09	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q10	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q11	200088	TRANS SILICO PNP 2N4248	FAIRCHILD	2N4248
Q12	200037	TRANS SILICO NPN 2N3646	FAIRCHILD	2N3646
Q13	200088	TRANS SILICO PNP 2N4248	FAIRCHILD	2N4248
Q14	200129	TRANS	FAIRCHILD	SE4020
Q15	200132	TRANS	FAIRCHILD	FPT100
Q16	200132	TRANS	FAIRCHILD	FPT100
Q17	200129	TRANS	FAIRCHILD	SE4020
Q18	200088	TRANS SILICO PNP 2N4248	FAIRCHILD	2N4248
Q19	200043	TRANS SILICO NPN 2N3565	FAIRCHILD	2N3565
Q20	200043	TRANS SILICO NPN 2N3565	FAIRCHILD	2N3565
Q21	200088	TRANS SILICO PNP 2N4248	FAIRCHILD	2N4248
Q22	200043	TRANS SILICO NPN 2N3565	FAIRCHILD	2N3565
Q23	200154	TRANS	MOTOROLA	MJE370
Q24	200088	TRANS SILICO PNP 2N4248	FAIRCHILD	2N4248

PARTS LIST

ASSEMBLY 403433 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
Q25	200155	TRANS					MCTORCLA	MJE520
Q26	200075	TRANS			2N4870		MOTOROLA	2N4870
Q27	200037	TRANS	SILICO	NPN	2N3646		FAIRCHILD	2N3646
Q28	200037	TRANS	SILICO	NPN	2N3646		FAIRCHILD	2N3646
Q29	200088	TRANS	SILICO	PNP	2N4248		FAIRCHILD	2N4248
Q30	200043	TRANS	SILICO	NPN	2N3565		FAIRCHILD	2N3565
Q31	200052	TRANS	SILICO	PNP	009		DANA	200052
R01	001681	RES	CARBON	7.5 K	5%	1/2 W	OHMITE	RC20GF752J
R02	001681	RES	CARBON	7.5 K	5%	1/2 W	OHMITE	RC20GF752J
R03	000750	RES	CARBON	75 OHM	5%	1/4 W	OHMITE	RC07GF750J
R04	000750	RES	CARBON	75 OHM	5%	1/4 W	OHMITE	RC07GF750J
R05	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R06	001681	RES	CARBON	7.5 K	5%	1/2 W	OHMITE	RC20GF752J
R07	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R08	000432	RES	CARBON	4.3 K	5%	1/4 W	OHMITE	RC07GF432J
R09	001681	RES	CARBON	7.5 K	5%	1/2 W	OHMITE	RC20GF752J
R10	000512	RES	CARBON	5.1 K	5%	1/4 W	OHMITE	RC07GF512J
R11	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R12	001681	RES	CARBON	7.5 K	5%	1/2 W	OHMITE	RC20GF752J
R13	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R14	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R15	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R16	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R17	000432	RES	CARBON	4.3 K	5%	1/4 W	OHMITE	RC07GF432J
R18	000822	RES	CARBON	8.2 K	5%	1/4 W	OHMITE	RC07GF822J
R19	000512	RES	CARBON	5.1 K	5%	1/4 W	OHMITE	RC07GF512J
R20	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R21	000201	RES	CARBON	200 OHM	5%	1/4 W	OHMITE	RC07GF201J
R22	000201	RES	CARBON	200 OHM	5%	1/4 W	OHMITE	RC07GF201J
R23	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R24	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R25	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R26	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R27	000200	RES	CARBON	20 OHM	5%	1/4 W	OHMITE	RC07GF200J
R28	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J

PARTS LIST

ASSEMBLY 403433 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
R29	000200	RES	CARBON	20	OHM	5%	1/4 W	OHMITE RC07GF200J
R30	030015	RES	WW	100	K	1%	10 W	C-F M-100
R31	000203	RES	CARBON	20	K	5%	1/4 W	OHMITE RC07GF203J
R32	010334	RES		SET				DANA 010334
R33	040187	POT	CERMET	500	OHM	20%		CTS 360T501B
R34	010334	RES		SET				DANA 010334
R35	000203	RES	CARBON	20	K	5%	1/4 W	OHMITE RC07GF203J
R36	000182	RES	CARBON	1.8	K	5%	1/4 W	OHMITE RC07GF182J
R37	040187	POT	CERMET	500	OHM	20%		CTS 360T501B
R38	010607	RES	METAL	17.999	K	.05%		VISHAY V53-1
R39	001721	RES	CARBON	2.2	OHM	5%	1/2 W	OHMITE RC20GF020J
R40	010608	RES	METAL	1798.9	OHM	.05%		VISHAY V53-1
R41	010658	RES		199.8	OHM	.05%		VISHAY V53-1
R42	000106	RES	CARBON	10	M	5%	1/4 W	OHMITE RC07GF106J
R43	000106	RES	CARBON	10	M	5%	1/4 W	OHMITE RC07GF106J
R44	040113	RES	VARI	100	K	10%		BECKMAN 79P100K
R45	010645	RES	METAL			1%	T-0	IRC RN55D2371F
R46	000516	RES	CARBON	51	M	5%	1/4 W	OHMITE RC07GF516J
R47	040113	RES	VARI	100	K	10%		BECKMAN 79P100K
R48	000332	RES	CARBON	3.3	K	5%	1/4 W	OHMITE RC07GF332J
R49	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE RC07GF103J
R50	000512	RES	CARBON	5.1	K	5%	1/4 W	OHMITE RC07GF512J
R51	000122	RES	CARBON	1.2	K	5%	1/4 W	OHMITE RC07GF122J
R52	000122	RES	CARBON	1.2	K	5%	1/4 W	OHMITE RC07GF122J
R53	000183	RES	CARBON	18	K	5%	1/4 W	OHMITE RC07GF183J
R54	001738	RES	CARBON	1.5	OHM	5%	1/2 W	OHMITE RC20GF010J
R55	001738	RES	CARBON	1.5	OHM	5%	1/2 W	OHMITE RC20GF010J
R56	001737	RES	FSV			5%	1/4 W	DANA 001737
R57	000151	RES	CARBON	150	OHM	5%	1/4 W	OHMITE RC07GF151J
R58	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE RC07GF102J
R59	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE RC07GF102J
R60	000391	RES	CARBON	390	OHM	5%	1/4 W	OHMITE RC07GF391J
R61	000121	RES	CARBON	120	OHM	5%	1/4 W	OHMITE RC07GF121J
R62	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE RC07GF102J
R63	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE RC07GF102J

ASSEMBLY 403433 - Model 4800

REF. DESIG.	PART NO.	DESCRIPTION							
R64	000511	RES	CARBON	510	OHM	5%	1/4 W	CHMITE	RC07GF511J
R65	000102	RES	CARBON	1	K	5%	1/4 W	CHMITE	RC07GF102J
R66	000202	RES	CARBON	2	K	5%	1/4 W	CHMITE	RC07GF202J
R67	020576	RES	WW	.24	OHM		5% 2W		
R68	040188	POT	CERMET	100	K	20%		CTS	360T104B
R69	010645	RES	METAL			1%	T-0	IRC	RN55D2371F
R70	000103	RES	CARBON	10	K	5%	1/4 W	CHMITE	RC07GF103J
R71	040113	RES	VARI	100	K	10%		BECKMAN	79P100K
S01	600684	SWITCH PUSHBUTTON						DANA	600684
S02	600684	SWITCH PUSHBUTTON						DANA	600684
S03	600682	SWITCH PUSHBUTTON						DANA	600682
S04	600682	SWITCH PUSHBUTTON						DANA	600682
S05	600683	SWITCH PUSHBUTTON						DANA	600683
S06	600683	SWITCH PUSHBUTTON						DANA	600683
TP01	600591	POST, TEST POINT						AMP	85931-6
TP07	600591	POST, TEST POINT						AMP	85931-6
T01	403553	TRANSFORMER, PULSE						DANA	403553
T02	403553	TRANSFORMER, PULSE						DANA	403553
T03	403553	TRANSFORMER, PULSE						DANA	403553
V01	920466	TUBE, READOUT						AMPEREX	ZM1005
V02	920466	TUBE, READOUT						AMPEREX	ZM1005
V03	920466	TUBE, READOUT						AMPEREX	ZM1005
V04	920466	TUBE, READOUT						AMPEREX	ZM1005
V05	920466	TUBE, READOUT						AMPEREX	ZM1005
W01	600245	JUMPER						GETTIG	1-2007-1
Y01	920513	CRYSTAL			2.4 MHz			ERC	
R72	001737	RES	FSV				5% 1/4W	DANA	001737

PARTS LIST

ASSEMBLY 403430 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION			
CR01	211083	DIODE SILICO	018	DANA	211083
CR02	211083	DIODE SILICO	018	DANA	211083
CR03	211083	DIODE SILICO	018	DANA	211083
CR04	211083	DIODE SILICO	018	DANA	211083
CR05	211083	DIODE SILICO	018	DANA	211083
CR06	211083	DIODE SILICO	018	DANA	211083
CR07	211083	DIODE SILICO	018	DANA	211083
CR08	211083	DIODE SILICO	018	DANA	211083
CR09	211083	DIODE SILICO	018	DANA	211083
CR10	211083	DIODE SILICO	018	DANA	211083
CR11	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR12	211083	DIODE SILICO	018	DANA	211083
CR13	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR14	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR15	210004	DIODE SILICO	SD4	DIODES IN SD4	
CR16	211083	DIODE SILICO	018	DANA	211083
CR17	211083	DIODE SILICO	018	DANA	211083
CR18	211083	DIODE SILICO	018	DANA	211083
CR19	211083	DIODE SILICO	018	DANA	211083
CR20	220059	DIODE ZENER			
CR22	211083	DIODE SILICO	018	DANA	211083
CR23	211083	DIODE SILICO	018	DANA	211083
CR24	211083	DIODE SILICO	018	DANA	211083
CR25	211083	DIODE SILICO	018	DANA	211083
CR26	211083	DIODE SILICO	018	DANA	211083
CR27	211083	DIODE SILICO	018	DANA	211083
CR28	211083	DIODE SILICO	018	DANA	211083
CR29	211083	DIODE SILICO	018	DANA	211083
CR30	211083	DIODE SILICO	018	DANA	211083
CR31	211083	DIODE SILICO	018	DANA	211083
CR32	211083	DIODE SILICO	018	DANA	211083
CR33	211083	DIODE SILICO	018	DANA	211083
CR34	211083	DIODE SILICO	018	DANA	211083
CR35	211083	DIODE SILICO	018	DANA	211083
CR36	211083	DIODE SILICO	018	DANA	211083

PARTS LIST

ASSEMBLY 403430 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION			
CR37	211083	DIODE SILICO	018	DANA	211083
CR38	211083	DIODE SILICO	018	DANA	211083
CR39	211083	DIODE SILICO	018	DANA	211083
CR40	211083	DIODE SILICO	018	DANA	211083
CR41	211083	DIODE SILICO	018	DANA	211083
CR42	211083	DIODE SILICO	018	DANA	211083
CR43	211083	DIODE SILICO	018	DANA	211083
CR44	211083	DIODE SILICO	018	DANA	211083
CR45	211083	DIODE SILICO	018	DANA	211083
CR46	211083	DIODE SILICO	018	DANA	211083
CR47	211083	DIODE SILICO	018	DANA	211083
CR48	211083	DIODE SILICO	018	DANA	211083
CR49	211083	DIODE SILICO	018	DANA	211083
C01	120230	CAP POLY	.015 MFD 33 V 1%	NPC	
M01	230034	INTEGRATED CIRCUIT		TI	SN7441N
M02	230072	INTEGRATED CIRCUIT		TI	SN7474N
M03	230035	INTEGRATED CIRCUIT		TI	SN7473N
M04	230030	INTEGRATED CIRCUIT		TI	SN7402N
M05	230028	INTEGRATED CIRCUIT		TI	SN7400N
M06	230074	INTEGRATED CIRCUIT		IRC	SN7442N
M07	230029	INTEGRATED CIRCUIT		TI	SN7401N
M07	230030	INTEGRATED CIRCUIT		TI	SN7402N
M08	230030	INTEGRATED CIRCUIT		TI	SN7402N
M09	230029	INTEGRATED CIRCUIT		TI	SN7401N
M10	230073	INTEGRATED CIRCUIT		LIBERTY	SN7405N
Q01	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q02	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q03	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q04	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q05	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q06	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q07	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q08	200087	TRANS SILICO	021	MOTOROLA	SPS1226
Q09	200087	TRANS SILICO	021	MOTOROLA	SPS1226

PARTS LIST

ASSEMBLY 403430 - Model 4800

REF. DESIG.	PART NO.	DESCRIPTION
Q10	200087	TRANS SILICO 021 MOTOROLA SPS1226
Q11	200087	TRANS SILICO 021 MOTOROLA SPS1226
Q12	200037	TRANS SILICO NPN 2N3646 FAIRCHILD 2N3646
Q13	200037	TRANS SILICO NPN 2N3646 FAIRCHILD 2N3646
Q14	200087	TRANS SILICO 021 MOTOROLA SPS1226
R01	000514	RES CARBON 510 K 5% 1/4 W OHMITE RC07GF524J
R02	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R03	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R04	000514	RES CARBON 510 K 5% 1/4 W OHMITE RC07GF524J
R05	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R06	000514	RES CARBON 510 K 5% 1/4 W OHMITE RC07GF524J
R07	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R08	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R09	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R10	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R11	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R12	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R13	000512	RES CARBON 5.1 K 5% 1/4 W OHMITE RC07GF512J
R14	000512	RES CARBON 5.1 K 5% 1/4 W OHMITE RC07GF512J
R15	000512	RES CARBON 5.1 K 5% 1/4 W OHMITE RC07GF512J
R16	000512	RES CARBON 5.1 K 5% 1/4 W OHMITE RC07GF512J
R17	000512	RES CARBON 5.1 K 5% 1/4 W OHMITE RC07GF512J
R18	000433	RES CARBON 43 K 5% 1/4 W OHMITE RC07GF433J
R19	000302	RES CARBON 3 K 5% 1/4 W OHMITE RC07GF302J
R20	000432	RES CARBON 4.3 K 5% 1/4 W OHMITE RC07GF432J
R21	000432	RES CARBON 4.3 K 5% 1/4 W OHMITE RC07GF432J
R22	000302	RES CARBON 3 K 5% 1/4 W OHMITE RC07GF302J
R23	000512	RES CARBON 5.1 K 5% 1/4 W OHMITE RC07GF512J
R24	000432	RES CARBON 4.3 K 5% 1/4 W OHMITE RC07GF432J
R25	000432	RES CARBON 4.3 K 5% 1/4 W OHMITE RC07GF432J
R26	000432	RES CARBON 4.3 K 5% 1/4 W OHMITE RC07GF432J
R27	000103	RES CARBON 10 K 5% 1/4 W OHMITE RC07GF103J
R28	000103	RES CARBON 10 K 5% 1/4 W OHMITE RC07GF103J
R29	000103	RES CARBON 10 K 5% 1/4 W OHMITE RC07GF103J
R30	000103	RES CARBON 10 K 5% 1/4 W OHMITE RC07GF103J

PARTS LIST

ASSEMBLY 403430 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION						
R31	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R32	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R33	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R34	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R35	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R36	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R37	000102	RES	CARBON	1 K	5%	1/4 W	CHMITE	RC07GF102J
R38	000242	RES	CARBON	2.4 K	5%	1/4 W	CHMITE	RC07GF242J
R39	010568	RES	METAL	1.54 K	.25%	(T-2)	IRC	RN55C
R40	000242	RES	CARBON	2.4 K	5%	1/4 W	CHMITE	RC07GF242J
R41	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R42	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R43	000512	RES	CARBON	5.1 K	5%	1/4 W	CHMITE	RC07GF512J
R44	000102	RES	CARBON	1 K	5%	1/4 W	CHMITE	RC07GF102J
R45	000102	RES	CARBON	1 K	5%	1/4 W	CHMITE	RC07GF102J
R46	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R47	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R48	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R49	000102	RES	CARBON	1 K	5%	1/4 W	CHMITE	RC07GF102J
R50	000102	RES	CARBON	1 K	5%	1/4 W	CHMITE	RC07GF102J
R51	000621	RES	CARBON	620 OHM	5%	1/4 W	CHMITE	RC07GF621J
R52	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
S01	600675	SWITCH, ROTARY					DANA	600675
S02	600674	SWITCH, ROTARY					DANA	600674
W01	600245	JUMPER					GETTIG	L-2007-1
W02	600245	JUMPER					GETTIG	L-2007-1
W03	600245	JUMPER					GETTIG	L-2007-1

PARTS LIST

ASSEMBLY 403432 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION					
AR01	230054	INTEGRATED CIRCUIT	LM301A		NAT SEMI	LM301A	
AR02	230109	INTEGRATED CIRCUIT	LM301A - SELECTED		DANA	230109	
AR03	230054	INTEGRATED CIRCUIT	LM301A		NAT SEMI	LM301A	
AR04	230109	INTEGRATED CIRCUIT	LM301A- SELECTED		DANA	230109	
AR05	230056	INTEGRATED CIRCUIT	UA710C		FAIRCHILD	U6A7710393	
CR01	211083	DIODE SILICO	018		DANA	211083	
CR02	211083	DIODE SILICO	018		DANA	211083	
CR03	211083	DIODE SILICO	018		DANA	211083	
CR04	211083	DIODE SILICO	018		DANA	211083	
CR05	211083	DIODE SILICO	018		DANA	211083	
CR06	220026	DIODE ZENER			MOTOROLA	1N963B	
CR07	211083	DIODE SILICO	018		DANA	211083	
CR08	220054	DIODE ZENER			MOTOROLA	1N5260B	
CR09	211236	DIODE SILICO	007		DANA	211236	
CR10	403423	ASSEMBLY, ZENER			DANA	403423	
CR11	211236	DIODE SILICO	007		DANA	211236	
CR12	211236	DIODE SILICO	007		DANA	211236	
CR13	211083	DIODE SILICO	018		DANA	211083	
CR14	211083	DIODE SILICO	018		DANA	211083	
CR15	211083	DIODE SILICO	018		DANA	211083	
CR16	211083	DIODE SILICO	018		DANA	211083	
CR17	211083	DIODE SILICO	018		DANA	211083	
CR18	211083	DIODE SILICO	018		DANA	211083	
CR19	220026	DIODE ZENER			MOTOROLA	1N963B	
CR20	220027	DIODE SILICO ZENER 1N749A			MOTOROLA	1N749A	
CR21	220059	DIODE ZENER					
CR22	220007	DIODE SILICO ZENER 1N751			MOTOROLA	1N751	
C01	110125	CAP TANT	2.2 MFD 35 V		ITT	43212 17122	
C02	110125	CAP TANT	2.2 MFD 35 V		ITT	43212 17122	
C03	101098	CAP CERAM	330 PFD 500 V	10%	AERCVCX	SCD1X5F	
C04	101145	CAP CERAM	100 PFD 500 V	10%	AERCVCX	SCD1X5F	
C05	101145	CAP CERAM	100 PFD 500 V	10%	AERCVCX	SCD1X5F	
C06	120253	CAP	.33 MFD 100 V	1%	TRW	863UW	
C07	110125	CAP TANT	2.2 MFD 35 V		ITT	43212 17122	
C08	101642	CAP CERAM	150 PFD 500 V	10%	AERCVCX	SCD2X5F	

PARTS LIST

ASSEMBLY 403432 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION					
C09	101642	CAP	CERAM	150 PFD 500 V	10%	AEROVOX	SCD2X5F
C10	101642	CAP	CERAM	150 PFD 500 V	10%	AEROVOX	SCD2X5F
C11	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE	TH-S10
C12	100012	CAP	CERAM	33 PFD 500 V	10%	AEROVOX	TCD-N750
C13	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE	TH-S10
C14	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE	TH-S10
C15	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE	TH-S10
C17	110126	CAP	TANTA	6.8 MFD 35 V		ITT	4312 17168
C18	100012	CAP	CERAM	33 PFD 500 V	10%	AEROVOX	TCD-N750
C19	110126	CAP	TANTA	6.8 MFD 35 V		ITT	4312 17168
C20	100038	CAP	CERAM	560 PFD 500 V	5%	AEROVOX	TCD-N 750
C21	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE	TH-S10
C22	110126	CAP	TANTA	6.8 MFD 35 V		ITT	4312 17168
C23	100012	CAP	CERAM	33 PFD 500 V	10%	AEROVOX	TCD-N750
C24	110127	CAP	TANT	22 MFD 6.3 V		ITT	43212 12222
C25	110126	CAP	TANTA	6.8 MFD 35 V		ITT	4312 17168
C26	110129	CAP	TANTA	.1MF 35V		ITT	4321217010
C27	110127	CAP	TANT	22 MFD 6.3 V		ITT	43212 12222
C28	110126	CAP	TANTA			ITT	4312 17168
C30	100051	CAP		3 PF		TCD	B1-0
C31	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE	TH-S10
M01	230028	INTEGRATED CIRCUIT				TI	SN7400N
M02	230028	INTEGRATED CIRCUIT				TI	SN7400N
Q01	200037	TRANS SILICO NPN		2N3646		FAIRCHILD	2N3646
Q02	200037	TRANS SILICO NPN		2N3646		FAIRCHILD	2N3646
Q03	200037	TRANS SILICO NPN		2N3646		FAIRCHILD	2N3646
Q04	200037	TRANS SILICO NPN		2N3646		FAIRCHILD	2N3646
Q05	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q06	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q07	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q08	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q09	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q10	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q11	200088	TRANS SILICO PNP		2N4248		FAIRCHILD	2N4248
Q12	200043	TRANS SILICO NPN		2N3565		FAIRCHILD	2N3565

PARTS LIST

ASSEMBLY 403432 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION
Q13	200162	SWITCHES FET MATCHED SET LEDEL
Q14	200129	TRANS FAIRCHILD SE4020
Q15	200162	SWITCHES FET MATCHED SET LEDEL
Q16	200129	TRANS FAIRCHILD SE4020
Q17	200162	SWITCHES FET MATCHED SET LEDEL
Q18	200129	TRANS FAIRCHILD SE4020
Q19	200088	TRANS SILICO PNP 2N4248 FAIRCHILD 2N4248
Q20	200160	FET LEDEL LS4416
Q21	200161	DUAL FET LEDEL LS3954
Q22	200088	TRANS SILICO PNP 2N4248 FAIRCHILD 2N4248
Q24	200035	TRANS SILICO NPN 014 DANA 200035
Q25	200088	TRANS SILICO PNP 2N4248 FAIRCHILD 2N4248
Q26	200037	TRANS SILICO NPN 2N3646 FAIRCHILD 2N3646
Q27	200088	TRANS SILICO PNP 2N4248 FAIRCHILD 2N4248
Q28	200160	FET LEDEL LS4416
R01	000153	RES CARBON 15 K 5% 1/4 W OHMITE RC07GF153J
R03	000272	RES CARBON 2.7 K 5% 1/4 W OHMITE RC07GF272J
R04	000272	RES CARBON 2.7 K 5% 1/4 W OHMITE RC07GF272J
R05	000153	RES CARBON 15 K 5% 1/4 W OHMITE RC07GF153J
R06	000272	RES CARBON 2.7 K 5% 1/4 W OHMITE RC07GF272J
R07	000272	RES CARBON 2.7 K 5% 1/4 W OHMITE RC07GF272J
R08	000153	RES CARBON 15 K 5% 1/4 W OHMITE RC07GF153J
R09	000511	RES CARBON 510 OHM 5% 1/4 W OHMITE RC07GF511J
R10	000511	RES CARBON 510 OHM 5% 1/4 W OHMITE RC07GF511J
R11	000153	RES CARBON 15 K 5% 1/4 W OHMITE RC07GF153J
R12	000392	RES CARBON 0003.9 K 5% 1/4 W OHMITE RC07GF392J
R13	000104	RES CARBON 100 K 5% 1/4 W OHMITE RC07GF104J
R14	000202	RES CARBON 2 K 5% 1/4 W OHMITE RC07GF202J
R15	000392	RES CARBON 0003.9 K 5% 1/4 W OHMITE RC07GF392J
R16	000392	RES CARBON 0003.9 K 5% 1/4 W OHMITE RC07GF392J
R17	000152	RES CARBON 1.5 K 5% 1/4 W OHMITE RC07GF152J
R18	000104	RES CARBON 100 K 5% 1/4 W OHMITE RC07GF104J
R19	000104	RES CARBON 100 K 5% 1/4 W OHMITE RC07GF104J
R20	000562	RES CARBON 5.6 K 5% 1/4 W OHMITE RC07GF562J
R21	000362	RES CARBON 3.6 K 5% 1/4 W OHMITE RC07GF362J

PARTS LIST

ASSEMBLY 403432 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION							
R22	000511	RES	CARBON	510	OHM	5%	1/4 W	OHMITE	RC07GF511J
R23	000152	RES	CARBON	1.5	K	5%	1/4 W	OHMITE	RC07GF152J
R24	000104	RES	CARBON	100	K	5%	1/4 W	OHMITE	RC07GF104J
R25	000152	RES	CARBON	1.5	K	5%	1/4 W	OHMITE	RC07GF152J
R26	000104	RES	CARBON	100	K	5%	1/4 W	OHMITE	RC07GF104J
R27	000152	RES	CARBON	1.5	K	5%	1/4 W	OHMITE	RC07GF152J
R28	000303	RES	CARBON	30	K	5%	1/4 W	OHMITE	RC07GF303J
R29	000302	RES	CARBON	3	K	5%	1/4 W	OHMITE	RC07GF302J
R30	000302	RES	CARBON	3	K	5%	1/4 W	OHMITE	RC07GF302J
R31	000302	RES	CARBON	3	K	5%	1/4 W	OHMITE	RC07GF302J
R32	010169	RES	METAL	100	K	1%	1/4 W	ELECTRA	RN60D1003F
R33	000105	RES	CARBON	1	M	5%	1/4 W	OHMITE	RC07GF105J
R34	040180	POT		1	M	20%		CTS	360S105B
R35	000123	RES	CARBON	12	K	5%	1/4 W	OHMITE	RC07GF123J
R36	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE	RC07GF102J
R37	010582	RES	METAL	30.1	K	1%	T-0	IRC	RN55D3012F
R38	000202	RES	CARBON	2	K	5%	1/4 W	OHMITE	RC07GF202J
R39	010580	RES	METAL	21	K	1%	T-0	IRC	RN55D2102F
R40	010582	RES	METAL	30.1	K	1%	T-0	IRC	RN55D3012F
R41	010647	RES	METAL	316	OHM	1%		IRC	RN65E3160F
R42	000270	RES	CARBON	27	OHM	5%	1/4 W	OHMITE	RC07GF270J
R43	040174	POT	CERMET	500	OHM			BECKMAN	79PR500
R44	010645	RES	METAL			1%	T-0	IRC	RN55D2371F
R45	403423	ASSEMBLY ZENER						DANA	403423
R46	000513	RES	CARBON	51	K	5%	1/4 W	OHMITE	RC07GF513J
R47	000562	RES	CARBON	5.6	K	5%	1/4 W	OHMITE	RC07GF562J
R48	000435	RES	CARBON	4.3	M	5%	1/4 W	OHMITE	RC07GF435J
R51	000302	RES	CARBON	3	K	5%	1/4 W	OHMITE	RC07GF302J
R53	000306	RES	CARBON	30	M	5%	1/4 W	OHMITE	RC07GF306J
R54	000156	RES	CARBON	15	M	5%	1/4 W	OHMITE	RC07GF156J
R55	040210	POT	CERMET	100	K		1 W	CTS	360S104B
R56	000511	RES	CARBON	510	OHM	5%	1/4 W	OHMITE	RC07GF511J
R57	000752	RES	CARBON	7.5	K	5%	1/4 W	OHMITE	RC07GF752J
R58	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R59	040113	RES	VARI	100	K	10%		BECKMAN	79P100K

ASSEMBLY 403432 - Model 4800

REF. DESIG.	PART NO.	DESCRIPTION							
R60	000515	RES	CARBON	5.1	M	5%	1/4	W	CHMITE	RC07GF515J
R61	010586	RES		5	K	.02%			VISHAY	V53-1-M
R62	010646	RES	METAL			1%	T-0		IRC	RN55D2491F
R63	000102	RES	CARBON	1	K	5%	1/4	W	CHMITE	RC07GF102J
R64	010586	RES		5	K	.02%			VISHAY	V53-1-M
R65	000306	RES	CARBON	30	M	5%	1/4	W	CHMITE	RC07GF306J
R66	000183	RES	CARBON	18	K	5%	1/4	W	CHMITE	RC07GF183J
R67	000156	RES	CARBON	15	M	5%	1/4	W	CHMITE	RC07GF156J
R68	040210	POT	CERMET	100	K		1	W	CTS	360S104B
R69	000392	RES	CARBON	0003.9	K	5%	1/4	W	CHMITE	RC07GF392J
R70	000103	RES	CARBON	10	K	5%	1/4	W	CHMITE	RC07GF103J
R71	000202	RES	CARBON	2	K	5%	1/4	W	CHMITE	RC07GF202J
R72	000200	RES	CARBON	20	OHM	5%	1/4	W	CHMITE	RC07GF200J
R73	010585	RES		3.6	K	.02%			VISHAT	V53-1
R74	000153	RES	CARBON	15	K	5%	1/4	W	CHMITE	RC07GF153J
R77	000101	RES	CARBON	100	OHM	5%	1/4	W	CHMITE	RC07GF101J
R78	000101	RES	CARBON	100	OHM	5%	1/4	W	CHMITE	RC07GF101J
R79	000330	RES	CARBON	33	K	5%	1/4	W	CHMITE	RC07GF330J
R80	000302	RES	CARBON	3	K	5%	1/4	W	CHMITE	RC07GF302J
R81	040190	POT	CERMET	500	OHM				BECKMAN	62PAR500Z
R82	000104	RES	CARBON	100	K	5%	1/4	W	CHMITE	RC07GF104J
R83	040211	POT	CERMET	500	OHM	20%			CTS	360S Series
T01	403553	TRANSFORMER, PULSE							DANA	403553
T02	403553	TRANSFORMER, PULSE							DANA	403553
T03	403553	TRANSFORMER, PULSE							DANA	403553

PARTS LIST

ASSEMBLY 403434 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION					
AR01	230075	INTEGRATED CIRCUIT				FAIRCHILD	UA748C
AR02	230054	INTEGRATED CIRCUIT	LM301A			NAT SEMI	LM301A
CR01	220027	DIODE SILICO ZENER	1N749A			MOTOROLA	1N749A
CR02	220027	DIODE SILICO ZENER	1N749A			MOTOROLA	1N749A
CR07	220027	DIODE SILICO ZENER	1N749A			MOTOROLA	1N749A
CR08	211083	DIODE SILICO	018			DANA	211083
CR09	211083	DIODE SILICO	018			DANA	211083
CR10	221177	DIODE SILICO ZENER		1/4 W		MOTOROLA	M.2.4A25
CR11	220007	DIODE SILICO ZENER	1N751			MOTOROLA	1N751
CR12	220007	DIODE SILICO ZENER	1N751			MOTOROLA	1N751
CR13	210004	DIODE SILICO	SD4			DIODES IN SD4	
CR14	210004	DIODE SILICO	SD4			DIODES IN SD4	
CR15	211083	DIODE SILICO	018			DANA	211083
CR16	211083	DIODE SILICO	018			DANA	211083
CR17	211083	DIODE SILICO	018			DANA	211083
CR18	211083	DIODE SILICO	018			DANA	211083
CR19	211083	DIODE SILICO	018			DANA	211083
C01	120237	CAP POLY	.15 MFD	100 V	5%	NPC	KSC Series
C02	120237	CAP POLY	.15 MFD	100 V	5%	NPC	KSC Series
C03	121394	CAP MYLAR	.15 MFD	100 V	10%	CDE	WMF1P15
C04	101145	CAP CERAM	100 PFD	500 V	10%	AERCVCX	SC01X5F
C05	121091	CAP MYLAR	.033 MFD	100 V	10%	CDE	WMF1533
C06	120070	CAP POLY	3000 PFD	100 V	5%	NPC	KSC Series
C07	100025	CAP CERAM	.005 MFD	100 V	20%	ERIE	835-000-X5V05
C08	120257	CAP POLY	5 PFD	630 V		NPC	KSO Series
C09	100051	CAP	3 PF			TCD	81-0
C10	100012	CAP CERAM	33 PFD	500 V	10%	AERCVCX	TCD-N750
C11	121091	CAP MYLAR	.033 MFD	100 V	10%	CDE	WMF1533
C12	110125	CAP TANT	2.2 MFD	35 V		ITT	43212 17122
C13	110125	CAP TANT	2.2 MFD	35 V		ITT	43212 17122
C14	120257	CAP POLY	5 PFD	630 V		NPC	KSO Series
K01	310077	REED RELAY, SHIELD				ELECTROL	R2691-3
Q01	200136	TRANS				FAIRCHILD	SE4022
Q02	200136	TRANS				FAIRCHILD	SE4022
Q03	200088	TRANS SILICO PNP	2N4248			FAIRCHILD	2N4248

PARTS LIST

ASSEMBLY 403434 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION							
Q04	201084	TRANS GERMAN PNP		2N1304				TI	2N1304
Q05	200137	TRANS						FAIRCHILD	2N4248
Q06	200137	TRANS						FAIRCHILD	2N4248
Q07	200140	TRANS DUAL		TYPE 140 NPN				DANA	200140
Q08	200140	TRANS DUAL		TYPE 140 NPN				DANA	200140
Q09	200142	TRANS						FAIRCHILD	2N4249
Q10	200035	TRANS SILICO NPN		014				DANA	200035
Q11	200035	TRANS SILICO NPN		014				DANA	200035
Q12	200142	TRANS						FAIRCHILD	2N4249
Q13	200035	TRANS SILICO NPN		014				DANA	200035
Q14	200035	TRANS SILICO NPN		014				DANA	200035
Q15	200137	TRANS						FAIRCHILD	2N4248
Q16	200137	TRANS						FAIRCHILD	2N4248
Q17	200137	TRANS						FAIRCHILD	2N4248
Q18	200137	TRANS						FAIRCHILD	2N4248
Q19	200137	TRANS						FAIRCHILD	2N4248
Q20	200137	TRANS						FAIRCHILD	2N4248
R01	010536	RES	METAL	100 K	1%	T-0		IRC	RN55D1003F
R02	010621	RES	METAL FILM	49.9 K	1%			IRC	RN55C
R03	000245	RES	CARBON	2.4 M	5%	1/4 W		CHMITE	RC07GF245J
R04	000153	RES	CARBON	15 K	5%	1/4 W		CHMITE	RC07GF153J
R05	000202	RES	CARBON	2 K	5%	1/4 W		CHMITE	RC07GF202J
R06	000220	RES	CARBON	22 OHM	5%	1/4 W		CHMITE	RC07GF220J
R07	000912	RES	CARBON	9.1 K	5%	1/4 W		CHMITE	RC07GF912J
R08	020582	RES		18 K	5%	3 W		C-F	M-20
R09	000103	RES	CARBON	10 K	5%	1/4 W		CHMITE	RC07GF103J
R10	010529	RES		10 K	1%			IRC	RN55D
R11	000181	RES	CARBON	180 OHM	5%	1/4 W		CHMITE	RC07GF181J
R12	040113	RES	VARI	100 K	10%			BECKMAN	79P100K
R13	000107	RES	CARBON	100 M	5%	1/4 W		CHMITE	RC07GF107J
R14	001737	RES	FSV		5%	1/4 W		DANA	001737
R15	010584	RES	SET	T-2	1%			PYROFILM	PME70
R16	001737	RES	FSV		5%	1/4 W		DANA	001737
R17	010584	RES	SET	T-2	1%			PYROFILM	PME70
R18	000221	RES	CARBON	220 OHM	5%	1/4 W		CHMITE	RC07GF221J

PARTS LIST

ASSEMBLY 403434 - Model 4800

REF. DESIG.	PART NO.	DESCRIPTION							
R19	011178	RES	METAL	4.99 K	1%	1/4 W	ELECTRA	RN20X4994F
R20	000622	RES	CARBON	6.2 K	5%	1/4 W	OHMITE	RC07GF622J
R21	000430	RES	CARBON	43 OHM	5%	1/4 W	OHMITE	RC07GF430J
R22	000153	RES	CARBON	15 K	5%	1/4 W	OHMITE	RC07GF153J
R23	000681	RES	CARBON	680 OHM	5%	1/4 W	OHMITE	RC07GF681J
R24	000202	RES	CARBON	2 K	5%	1/4 W	OHMITE	RC07GF202J
R25	000821	RES	CARBON	820 OHM	5%	1/4 W	OHMITE	RC07GF821J
R26	000273	RES	CARBON	27 K	5%	1/4 W	OHMITE	RC07GF273J
R27	000330	RES	CARBON	33 K	5%	1/4 W	OHMITE	RC07GF330J
R28	000161	RES	CARBON	160 OHM	5%	1/4 W	OHMITE	RC07GF161J
R29	000111	RES	CARBON	110 OHM	5%	1/4 W	OHMITE	RC07GF111J
R30	000220	RES	CARBON	22 OHM	5%	1/4 W	OHMITE	RC07GF220J
R31	000430	RES	CARBON	43 OHM	5%	1/4 W	OHMITE	RC07GF430J
R32	000820	RES	CARBON	82 OHM	5%	1/4 W	OHMITE	RC07GF820J
R33	000273	RES	CARBON	27 K	5%	1/4 W	OHMITE	RC07GF273J
R34	000100	RES	CARBON	10 OHM	5%	1/4 W	OHMITE	RC07GF100J
R35	000435	RES	CARBON	4.3 M	5%	1/4 W	OHMITE	RC07GF435J
R36	040113	RES	VARI	100 K	10%		BECKMAN	79P100K

PARTS LIST

ASSEMBLY 403435 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
CR01	220011	DIODE SILICO ZENER 1N968A					MOTORCLA	1N968A
CR02	211083	DIODE SILICO 018					DANA	211083
CR03	211083	DIODE SILICO 018					DANA	211083
CR04	211236	DIODE SILICO 007					DANA	211236
CR05	211083	DIODE SILICO 018					DANA	211083
CR06	220007	DIODE SILICO ZENER 1N751					MOTORCLA	1N751
CR07	211083	DIODE SILICO 018					DANA	211083
CR08	211083	DIODE SILICO 018					DANA	211083
CR10	211083	DIODE SILICO 018					DANA	211083
CR11	211083	DIODE SILICO 018					DANA	211083
CR12	211083	DIODE SILICO 018					DANA	211083
CR13	211083	DIODE SILICO 018					DANA	211083
CR14	211083	DIODE SILICO 018					DANA	211083
CR15	220007	DIODE SILICO ZENER 1N751					MOTORCLA	1N751
CR16	211083	DIODE SILICO 018					DANA	211083
CR17	211083	DIODE SILICO 018					DANA	211083
CR18	220007	DIODE SILICO ZENER 1N751					MOTORCLA	1N751
CR19	220007	DIODE SILICO ZENER 1N751					MOTORCLA	1N751
CR20	220011	DIODE SILICO ZENER 1N968A					MOTORCLA	1N968A
CR21	22C06C	DIODE ZENER		24 V	5%		MOTOROLA	1N970B
C01	120034	CAP POLYS	100 PFD	500 V	5%		CRL	CPR-100J
C02	100017	CAP CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10	
C03	121091	CAP MYLAR	.033 MFD	100 V	10%	CDE	WMF1533	
C04	100012	CAP CERAM	33 PFD	500 V	10%	AERCVCX	TCD-N750	
C05	100008	CAP CERAM	82 PFD	500 V	10%	AERCVCX	TCD-N750	
C06	120001	CAP MYLAR	.0033 MFD	100 V	10%	CDE	WMF1D33	
C07	100017	CAP CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10	
C08	121093	CAP MYLAR	.047 MFD	100 V	10%	CDE	WMF1S47	
C09	120001	CAP MYLAR	.0033 MFD	100 V	10%	CDE	WMF1D33	
C10	100017	CAP CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10	
C11	100012	CAP CERAM	33 PFD	500 V	10%	AERCVCX	TCD-N750	
C12	100017	CAP CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10	
C13	100012	CAP CERAM	33 PFD	500 V	10%	AERCVCX	TCD-N750	
C14	110129	CAP TANTA	.1MF	35V		ITT	4321217010	

PARTS LIST

ASSEMBLY 403435 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION				
K01	310077	REED RELAY, SHIELD			ELECTROL	R2691-3
K02	310078	REED RELAY, SHIELD			ELECTROL	R2690-3
K03	310077	REED RELAY, SHIELD			ELECTROL	R2691-3
K04	310077	REED RELAY, SHIELD			ELECTROL	R2691-3
K05	310077	REED RELAY, SHIELD			ELECTROL	R2691-3
M01	230054	INTEGRATED CIRCUIT	LM301A		NAT SEMI	LM301A
M02	403494	AMP KIT	FSV	1/4 W	DANA	403393
M03	230054	INTEGRATED CIRCUIT	LM301A		NAT SEMI	LM301A
M04	230054	INTEGRATED CIRCUIT	LM301A		NAT SEMI	LM301A
M05	230054	INTEGRATED CIRCUIT	LM301A		NAT SEMI	LM301A
Q01	200160	FET			LEDEL	LS4416
Q02	200137	TRANS			FAIRCHILD	2N4248
Q03	200137	TRANS			FAIRCHILD	2N4248
Q04	200137	TRANS			FAIRCHILD	2N4248
Q05	200137	TRANS			FAIRCHILD	2N4248
Q06	200135	FET KIT			DANA	200135
Q07	200068	TRANS	2N4250		FAIRCHILD	2N4250
Q08	200088	TRANS SILICO PNP	2N4248		FAIRCHILD	2N4248
Q09	200043	TRANS SILICO NPN	2N3565		FAIRCHILD	2N3565
Q10	200088	TRANS SILICO PNP	2N4248		FAIRCHILD	2N4248
Q11	200035	TRANS SILICO NPN	014		DANA	200035
Q12	200160	FET			LEDEL	LS4416
Q13	200035	TRANS SILICO NPN	014		DANA	200035
Q14	201084	TRANS GERMAN PNP	2N1304		TI	2N1304
Q15	200011	TRANS SILICO PNP	009		DANA	200011
Q16	200011	TRANS SILICO PNP	009		DANA	200011
Q17	200137	TRANS			FAIRCHILD	2N4248
Q18	200137	TRANS			FAIRCHILD	2N4248
Q19	200137	TRANS			FAIRCHILD	2N4248
R01	000203	RES CARBON	20 K	5% 1/4 W	OHMITE	RC07GF203J
R02	021154	RES WW	10 K	3% 1/4 W	C-F	C-FM20
R04	010741	RES CARBON	FSV	1%		
R05	021154	RES WW	10 K	3% 1/4 W	C-F	C-FM20
R06	021154	RES WW	10 K	3% 1/4 W	C-F	C-FM20

PARTS LIST

ASSEMBLY 403435 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
R07	010671	RES		494.8 K	.25%	T-0	PYROFILM	PME60
R08	010615	RES		10 K	.02%		VISHAY	V53-1
R09	010615	RES		10 K	.02%		VISHAY	V53-1
R10	020611	RES		200 OHM	.02%		NANSISTOR	5Q12A
R11	020615	RES	WW	4.8 K	1%		NANISTOR	5Q12A
R12	010621	RES	METAL FILM	49.9 K	1%		IRC	RN55C
R13	010621	RES	METAL FILM	49.9 K	1%		IRC	RN55C
R14	001737	RES	FSV		5%	1/4 W	DANA	001737
R15	001737	RES	FSV		5%	1/4 W	DANA	001737
R16	001737	RES	FSV		5%	1/4 W	DANA	001737
R17	000472	RES	CARBON	4.7 K	5%	1/4 W	CHMITE	RC07GF472J
R18	000151	RES	CARBON	150 OHM	5%	1/4 W	CHMITE	RC07GF151J
R19	040173	POT	CERMET	5 K			BECKMAN	79PR5K
R20	000106	RES	CARBON	10 M	5%	1/4 W	CHMITE	RC07GF106J
R21	000514	RES	CARBON	510 K	5%	1/4 W	CHMITE	RC07GF524J
R22	001737	RES	FSV		5%	1/4 W	DANA	001737
R23	040169	POT	CERMET	20 OHM	20%		BECKMAN	70PR20
R24	010652	RES		4.99 K	.05%		VISHAY	V53-1
R25	040113	RES	VARI	100 K	10%		BECKMAN	79P100K
R26	000244	RES	CARBON	240 K	5%	1/4 W	CHMITE	RC07GF244J
R27	010091	RES	METAL	11 K	1%	1/4 W	ELECTRA	RN60D1102F
R28	000182	RES	CARBON	1.8 K	5%	1/4 W	CHMITE	RC07GF182J
R29	040113	RES	VARI	100 K	10%		BECKMAN	79P100K
R30	010703	RES	METAL	555.50 OHM	.05%		VISHAY	V53-1
R31	000113	RES	CARBON	11 K	5%	1/4 W	CHMITE	RC07GF113J
R32	000202	RES	CARBON	2 K	5%	1/4 W	CHMITE	RC07GF202J
R33	000563	RES	CARBON	56 K	5%	1/4 W	CHMITE	RC07GF563J
R34	000101	RES	CARBON	100 OHM	5%	1/4 W	CHMITE	RC07GF101J
R35	040168	POT	CERMET	200 OHM	10%		BECKMAN	79PR200
R36	020604	RES		100 K	.05%		JORDAN	J-11
R37	040182	POT		250 K	20%		CTS	360S254B
R38	010682	RES	CARBON	9.8 M	1%		DALE	DCS1/2
R39	000203	RES	CARBON	20 K	5%	1/4 W	CHMITE	RC07GF203J
R40	000101	RES	CARBON	100 OHM	5%	1/4 W	CHMITE	RC07GF101J
R41	000221	RES	CARBON	220 OHM	5%	1/4 W	CHMITE	RC07GF221J

PARTS LIST

ASSEMBLY 403435 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION						
R42	040112	RES	VARI	2 K			BECKMAN	79PR2K
R43	020612	RES		1.009 M	.05%		JORDAN	J-12
R44	040172	POT	CERMET	50 K			BECKMAN	79PR50K
R45	010655	RES		11.086 M	.1%	T-9	PYROFILM	PME70
R46	000511	RES	CARBON	510 OHM	5%	1/4 W	OHMITE	RC07GF511J
R47	010654	RES		20 K	.05%		VISHAY	V53-1
R49	010615	RES		10 K	.02%		VISHAY	V53-1
R50	040113	RES	VARI	100 K	10%		BECKMAN	79P100K
R51	010656	RES		19.948 M	.1%	T-9	PYROFILM	PME75
R52	010615	RES		10 K	.02%		VISHAY	V53-1
R53	010586	RES		5 K	.02%		VISHAY	V53-1-M
R54	040113	RES	VARI	100 K	10%		BECKMAN	79P100K
R55	000472	RES	CARBON	4.7 K	5%	1/4 W	OHMITE	RC07GF472J
R56	000181	RES	CARBON	180 OHM	5%	1/4 W	OHMITE	RC07GF181J
R57	001100	RES	CARBON	2.2 K	5%	1/2 W	OHMITE	RC20GF222J
R58	010654	RES		20 K	.05%		VISHAY	V53-1
R59	000202	RES	CARBON	2 K	5%	1/4 W	OHMITE	RC07GF202J
R60	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R61	000273	RES	CARBON	27 K	5%	1/4 W	OHMITE	RC07GF273J
R62	000331	RES	CARBON	330 OHM	5%	1/4 W	OHMITE	RC07GF331J
R63	000680	RES	CARBON	68 OHM	5%	1/4 W	OHMITE	RC07GF680J
R64	000222	RES	CARBON	2.2 K	5%	1/4 W	OHMITE	RC07GF222J
R65	001100	RES	CARBON	2.2 K	5%	1/2 W	OHMITE	RC20GF222J
R66	040085	RES	VARI	500 K	30%		BECKMAN	79PR500K
R67	000202	RES	CARBON	2 K	5%	1/4 W	OHMITE	RC07GF202J
R68	403494	AMP KIT		FSV		1/4 W	DANA	403494
R69	403494	AMP KIT		FSV		1/4 W	DANA	403494
R03	020614	RES		19.81 K	.01%		JORDAN	J-11
R48	000682	RES	CARBON	6.8 K	5%	1/4 W	OHMITE	RC07GF682J

PARTS LIST

ASSEMBLY 403431 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION			
CR01	210021	DIODE		DANA	210021
CR02	210021	DIODE		DANA	210021
CR03	210021	DIODE		DANA	210021
CR04	210021	DIODE		DANA	210021
CR05	211083	DIODE SILICO	018	DANA	211083
CR06	220007	DIODE SILICO ZENER	1N751	MOTORCLA	1N751
CR07	211083	DIODE SILICO	018	DANA	211083
CR08	211083	DIODE SILICO	018	DANA	211083
CR09	211083	DIODE SILICO	018	DANA	211083
CR10	211083	DIODE SILICO	018	DANA	211083
CR11	211083	DIODE SILICO	018	DANA	211083
CR12	211083	DIODE SILICO	018	DANA	211083
CR13	211083	DIODE SILICO	018	DANA	211083
CR14	211083	DIODE SILICO	018	DANA	211083
CR15	211083	DIODE SILICO	018	DANA	211083
C01	100040	CAP	200 PF	SPRAGUE	5GA-T20
K01	310060	RELAY	1000 V	P&B	R10E1223-2
K02	310060	RELAY	1000 V	P&B	R10E1223-2
K03	310060	RELAY	1000 V	P&B	R10E1223-2
M01	230073	INTEGRATED CIRCUIT		LIBERTY	SN7405N
M02	230029	INTEGRATED CIRCUIT		TI	SN7401N
M03	230073	INTEGRATED CIRCUIT		LIBERTY	SN7405N
M04	230034	INTEGRATED CIRCUIT		TI	SN7441N
Q01	200037	TRANS SILICO NPN	2N3646	FAIRCHILD	2N3646
Q02	200037	TRANS SILICO NPN	2N3646	FAIRCHILD	2N3646
Q03	200037	TRANS SILICO NPN	2N3646	FAIRCHILD	2N3646
Q04	200037	TRANS SILICO NPN	2N3646	FAIRCHILD	2N3646
Q05	200132	TRANS		FAIRCHILD	FPT100
Q06	200132	TRANS		FAIRCHILD	FPT100
Q07	200132	TRANS		FAIRCHILD	FPT100
Q08	200132	TRANS		FAIRCHILD	FPT100
Q09	200043	TRANS SILICO NPN	2N3565	FAIRCHILD	2N3565
Q10	200043	TRANS SILICO NPN	2N3565	FAIRCHILD	2N3565
Q11	200043	TRANS SILICO NPN	2N3565	FAIRCHILD	2N3565
Q12	200043	TRANS SILICO NPN	2N3565	FAIRCHILD	2N3565

PARTS LIST

ASSEMBLY 403431 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
Q13	20C037	TRANS SILICO NPN		2N3646			FAIRCHILD	2N3646
Q14	200037	TRANS SILICO NPN		2N3646			FAIRCHILD	2N3646
Q15	200037	TRANS SILICO NPN		2N3646			FAIRCHILD	2N3646
R01	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R02	000182	RES	CARBON	1.8 K	5%	1/4 W	OHMITE	RC07GF182J
R03	000182	RES	CARBON	1.8 K	5%	1/4 W	OHMITE	RC07GF182J
R04	000182	RES	CARBON	1.8 K	5%	1/4 W	OHMITE	RC07GF182J
R05	000182	RES	CARBON	1.8 K	5%	1/4 W	OHMITE	RC07GF182J
R06	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R07	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R08	000750	RES	CARBON	75 OHM	5%	1/4 W	OHMITE	RC07GF750J
R09	000750	RES	CARBON	75 OHM	5%	1/4 W	OHMITE	RC07GF750J
R10	000750	RES	CARBON	75 OHM	5%	1/4 W	OHMITE	RC07GF750J
R11	000750	RES	CARBON	75 OHM	5%	1/4 W	OHMITE	RC07GF750J
R12	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R13	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R14	000203	RES	CARBON	20 K	5%	1/4 W	OHMITE	RC07GF203J
R15	000203	RES	CARBON	20 K	5%	1/4 W	OHMITE	RC07GF203J
R16	000203	RES	CARBON	20 K	5%	1/4 W	OHMITE	RC07GF203J
R17	000203	RES	CARBON	20 K	5%	1/4 W	OHMITE	RC07GF203J
R18	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R19	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R20	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R21	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R22	000103	RES	CARBON	10 K	5%	1/4 W	OHMITE	RC07GF103J
R23	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R24	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R25	001758	RES	CARBON	330 OHM	5%	1 W	OHMITE	RC32GF331J
R26	001784	RES		910 OHM	5%	1/2 W		
R27	000305	RES	CARBON	3 M	5%	1/4 W	OHMITE	RC07GF305J

PARTS LIST

ASSEMBLY 403470 - Model 4800

REF. DESIG.	PART NO.	DESCRIPTION					
AR01	230091	INTEGRATED CIRCUIT	UA725			DANA	230091
AR02	230091	INTEGRATED CIRCUIT	UA725			DANA	230091
AR03	230091	INTEGRATED CIRCUIT	UA725			DANA	230091
AR04	230070	INTEGRATED CIRCUIT	UA725			FAIRCHILD	U5B7725393
B01	920563	BEADS				FERX CBE	56-59065-4B
B02	920563	BEADS				FERX CBE	56-59065-4B
B03	920563	BEADS				FERX CBE	56-59065-4B
B04	920563	BEADS				FERX CBE	56-59065-4B
B05	920563	BEADS				FERX CBE	56-59065-4B
B06	920563	BEADS				FERX CBE	56-59065-4B
CR01	211083	DIODE SILICO	018			DANA	211083
CR02	220016	DIODE SILICO ZENER	1N964B			MOTOROLA	1N964B
CR03	220004	DIODE SILICO ZENER	1N961B			MOTOROLA	1N961B
CR04	220004	DIODE SILICO ZENER	1N961B			MOTOROLA	1N961B
CR05	220004	DIODE SILICO ZENER	1N961B			MOTOROLA	1N961B
CR06	220004	DIODE SILICO ZENER	1N961B			MOTOROLA	1N961B
CR07	210035	DIODE				HP	5082-2810
CR08	210035	DIODE				HP	5082-2810
CR09	210035	DIODE				HP	5082-2810
CR10	210035	DIODE				HP	5082-2810
CR11	220004	DIODE SILICO ZENER	1N961B			MOTOROLA	1N961B
CR12	220004	DIODE SILICO ZENER	1N961B			MOTOROLA	1N961B
CR13	210035	DIODE				HP	5082-2810
CR14	210035	DIODE				HP	5082-2810
C01	110140	CAP TANTA	47 MFD	6.3 V		ITT	4-3212-12247
C02	110140	CAP TANTA	47 MFD	6.3 V		ITT	4-3212-12247
C03	110141	CAP	22 MFD	16 V		ITT	43212-14222
C04	130131	CAP	20 PFD	100 V		AMPEREX	C010KA/20E
C05	100050	CAP				SPRAGUE	10TCC-V22
C06	100081	CAP	4.7 PFD	1000 V		SPRAGUE	C030B102E4R7D
C07	100050	CAP				SPRAGUE	10TCC-V22
C08	130131	CAP	20 PFD	100 V		AMPEREX	C010KA/20E
C09	100017	CAP CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10
C10	100017	CAP CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10

PARTS LIST

ASSEMBLY 403470 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION				
C11	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C12	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C13	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C14	100081	CAP		4.7 PFD 1000 V		SPRAGUE C030B102E4R7D
C15	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C16	110151	CAP		10 MFD 25 V		ITT 43212-16210
C17	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C18	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C19	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C20	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C21	101098	CAP	CERAM	330 PFD 500 V	10%	AERCVCX SCD1X5F
C22	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C23	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C24	101098	CAP	CERAM	330 PFD 500 V	10%	AERCVCX SCD1X5F
C25	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C26	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C27	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C28	100056	CAP	DISC			SPRAGUE 10TCC-V82
C29	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C30	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C31	100056	CAP	DISC			SPRAGUE 10TCC-V82
C32	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C33	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C34	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C35	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C36	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C37	110141	CAP		22 MFD 16 V		ITT 43212-14222
C38	110151	CAP		10 MFD 25 V		ITT 43212-16210
C39	110141	CAP		22 MFD 16 V		ITT 43212-14222
C40	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C41	130131	CAP		20 PFD 100 V		AMPEREX C010KA/20E
C42	120025	CAP	MYLAR	1.5 MFD 100 V	10%	IMB XA281551C
C43	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C44	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C45	100068	CAP	CERAM	.02 MFD 100 V	20%	SPRAGUE TG-S20

PARTS LIST

ASSEMBLY 403470 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION				
C46	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C47	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C48	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C49	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C50	100081	CAP		4.7 PFD 1000 V		SPRAGUE C030B102E4R7D
C51	100080	CAP		.05 MFD 100 V	20%	SPRAGUE TG-S50
C52	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C53	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C54	101098	CAP	CERAM	330 PFD 500 V	10%	AERCVOX SCD1X5F
C55	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C56	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C57	100056	CAP	DISC			SPRAGUE 10TCC-V82
C58	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C59	110126	CAP	TANTA	6.8 MFD 35 V		ITT 4312 17168
C60	100017	CAP	CERAM	.01 MFD 200 V	10%	SPRAGUE TH-S10
C61	110151	CAP		10 MFD 25 V		ITT 43212-16210
Q01	200179	TRANS, FET				MOTOROLA 2N4391
Q02	200129	TRANS				FAIRCHILD SE4020
Q03	200176	TRANS				FAIRCHILD SE3005
Q04	200176	TRANS				FAIRCHILD SE3005
Q05	200176	TRANS				FAIRCHILD SE3005
Q06	200178	TRANS				FAIRCHILD 2N5910
Q07	200176	TRANS				FAIRCHILD SE3005
Q08	200178	TRANS				FAIRCHILD 2N5910
Q09	200176	TRANS				FAIRCHILD SE3005
Q10	200176	TRANS				FAIRCHILD SE3005
Q11	200176	TRANS				FAIRCHILD SE3005
Q12	200178	TRANS				FAIRCHILD 2N5910
Q13	200176	TRANS				FAIRCHILD SE3005
Q14	200176	TRANS				FAIRCHILD SE3005
Q15	200178	TRANS				FAIRCHILD 2N5910
Q16	200176	TRANS				FAIRCHILD SE3005
Q17	200176	TRANS				FAIRCHILD SE3005
Q18	200176	TRANS				FAIRCHILD SE3005
Q19	200178	TRANS				FAIRCHILD 2N5910

PARTS LIST

ASSEMBLY 403470 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION							
Q20	200176	TRANS						FAIRCHILD	SE3005
Q21	200176	TRANS						FAIRCHILD	SE3005
Q22	200178	TRANS						FAIRCHILD	2N5910
Q23	200176	TRANS						FAIRCHILD	SE3005
R01	010727	RES		2.5	K	.01%		VISHAY	V53-3-M
R03	020628	RES	WW	120.42	K	.02%		JORDAN	J-9D
R04	000100	RES	CARBON	10	OHM	5%	1/4 W	OHMITE	RC07GF100J
R05	020629	RES	WW	438.19	K	.02%		JORDAN	J-11D
R06	010586	RES		5	K	.02%		VISHAY	V53-1-M
R07	010727	RES		2.5	K	.01%		VISHAY	V53-3-M
R08	010615	RES		10	K	.02%		VISHAY	V53-1
R09	000513	RES	CARBON	51	K	5%	1/4 W	OHMITE	RC07GF513J
R10	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R100	010529	RES		10	K	1%		IRC	RN55D
R101	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R102	000303	RES	CARBON	30	K	5%	1/4 W	OHMITE	RC07GF303J
R103	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R104	000510	RES	CARBON	51	OHM	5%	1/4 W	OHMITE	RC07GF510J
R105	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R106	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R107	000161	RES	CARBON	160	OHM	5%	1/4 W	OHMITE	RC07GF161J
R108	000911	RES	CARBON	910	OHM	5%	1/4 W	OHMITE	RC07GF911J
R109	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R11	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE	RC07GF102J
R110	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R111	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R112	001737	RES	FSV			5%	1/4 W	DANA	001737
R112	600245	JUMPER						GETTIG	L-2007-1
R113	000107	RES	CARBON	100	M	5%	1/4 W	OHMITE	RC07GF107J
R114	000110	RES	CARBON	11	OHM	5%	1/4 W	OHMITE	RC07GF110J
R12	000561	RES	CARBON	560	OHM	5%	1/4 W	OHMITE	RC07GF561J
R13	000242	RES	CARBON	2.4	K	5%	1/4 W	OHMITE	RC07GF242J
R14	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R15	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R16	000621	RES	CARBON	620	OHM	5%	1/4 W	OHMITE	RC07GF621J

PARTS LIST

ASSEMBLY 403470 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
R17	000561	RES	CARBON	560 OHM	5%	1/4 W	OHMITE	RC07GF561J
R18	000107	RES	CARBON	100 M	5%	1/4 W	OHMITE	RC07GF107J
R19	000107	RES	CARBON	100 M	5%	1/4 W	OHMITE	RC07GF107J
R20	000107	RES	CARBON	100 M	5%	1/4 W	OHMITE	RC07GF107J
R21	000107	RES	CARBON	100 M	5%	1/4 W	OHMITE	RC07GF107J
R22	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R23	000242	RES	CARBON	2.4 K	5%	1/4 W	OHMITE	RC07GF242J
R24	000102	RES	CARBON	1 K	5%	1/4 W	OHMITE	RC07GF102J
R25	000362	RES	CARBON	3.6 K	5%	1/4 W	OHMITE	RC07GF362J
R26	040191	POT	CERMET	1 M			BECKMAN	79P
R27	040133	RES	VARI	200 K	10%		BECKMAN	79PR200K
R28	000150	RES	CARBON	15 OHM	5%	1/4 W	OHMITE	RC07GF150J
R29	000100	RES	CARBON	10 OHM	5%	1/4 W	OHMITE	RC07GF100J
R30	040191	POT	CERMET	1 M			BECKMAN	79P
R31	040133	RES	VARI	200 K	10%		BECKMAN	79PR200K
R32	000150	RES	CARBON	15 OHM	5%	1/4 W	OHMITE	RC07GF150J
R34	000100	RES	CARBON	10 OHM	5%	1/4 W	OHMITE	RC07GF100J
R35	000303	RES	CARBON	30 K	5%	1/4 W	OHMITE	RC07GF303J
R36	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R37	000303	RES	CARBON	30 K	5%	1/4 W	OHMITE	RC07GF303J
R38	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R39	000163	RES	CARBON	16 K	5%	1/4 W	OHMITE	RC07GF163J
R40	000303	RES	CARBON	30 K	5%	1/4 W	OHMITE	RC07GF303J
R41	000163	RES	CARBON	16 K	5%	1/4 W	OHMITE	RC07GF163J
R42	000303	RES	CARBON	30 K	5%	1/4 W	OHMITE	RC07GF303J
R43	010529	RES		10 K	1%		IRC	RN55D
R44	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R45	010529	RES		10 K	1%		IRC	RN55D
R46	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R47	000303	RES	CARBON	30 K	5%	1/4 W	OHMITE	RC07GF303J
R48	000303	RES	CARBON	30 K	5%	1/4 W	OHMITE	RC07GF303J
R49	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R50	000510	RES	CARBON	51 OHM	5%	1/4 W	OHMITE	RC07GF510J
R51	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J
R52	000101	RES	CARBON	100 OHM	5%	1/4 W	OHMITE	RC07GF101J

PARTS LIST

ASSEMBLY 403470 - Model 4800

REF. DESIG.	PART NO.	DESCRIPTION							
R53	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R54	000510	RES	CARBON	51	OHM	5%	1/4 W	OHMITE	RC07GF510J
R55	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R56	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R57	000161	RES	CARBON	160	OHM	5%	1/4 W	OHMITE	RC07GF161J
R58	000911	RES	CARBON	910	OHM	5%	1/4 W	OHMITE	RC07GF911J
R59	000161	RES	CARBON	160	OHM	5%	1/4 W	OHMITE	RC07GF161J
R60	000911	RES	CARBON	910	OHM	5%	1/4 W	OHMITE	RC07GF911J
R61	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R62	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R63	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R64	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R65	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R66	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R67	010615	RES			10 K		.02%	VISHAY	V53-1
R68	040123	RES	VARI	1	K			BECKMAN	62PRIK
R69	020627	RES	WW	81.73	K		.02%	JORDAN	J-9D
R70	010586	RES		5	K		.02%	VISHAY	V53-1-M
R71	010726	RES	METAL	10.71	K		.1%	IRC	RN55C
R72	010730	RES		5.355	K		.01%	VISHAY	V53-3-M
R73	010729	RES		31.31	K		.02%	VISHAY	V53-3-M
R74	040191	POT	CERMET	1	M			BECKMAN	79P
R75	000107	RES	CARBON	100	M	5%	1/4 W	OHMITE	RC07GF107J
R76	000107	RES	CARBON	100	M	5%	1/4 W	OHMITE	RC07GF107J
R77	000392	RES	CARBON	0003.9	K	5%	1/4 W	OHMITE	RC07GF392J
R78	010728	RES		33.91	K		.02%	VISHAY	V53-3-M
R79	010615	RES			10 K		.02%	VISHAY	V53-1
R80	000561	RES	CARBON	560	OHM	5%	1/4 W	OHMITE	RC07GF561J
R81	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R82	010661	RES		10	K		.01%	VISHAY	V53-3-M
R83	040133	RES	VARI	200	K	10%		BECKMAN	79PR200K
R84	000100	RES	CARBON	10	OHM	5%	1/4 W	OHMITE	RC07GF100J
R85	000561	RES	CARBON	560	OHM	5%	1/4 W	OHMITE	RC07GF561J
R86	000390	RES	CARBON	39	OHM	5%	1/4 W	OHMITE	RC07GF390J
R87	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J

ASSEMBLY 403470 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION							
R88	000107	RES	CARBON	100	M	5%	1/4 W	CHMITE	RC07GF107J
R89	000107	RES	CARBON	100	M	5%	1/4 W	CHMITE	RC07GF107J
R90	000102	RES	CARBON	1	K	5%	1/4 W	CHMITE	RC07GF102J
R91	000362	RES	CARBON	3.6	K	5%	1/4 W	CHMITE	RC07GF362J
R92	040191	POT	CERMET	1	M			BECKMAN	79P
R93	040133	RES	VARI	200	K	10%		BECKMAN	79PR200K
R94	000150	RES	CARBON	15	OHM	5%	1/4 W	CHMITE	RC07GF150J
R95	000100	RES	CARBON	10	OHM	5%	1/4 W	CHMITE	RC07GF100J
R96	000303	RES	CARBON	30	K	5%	1/4 W	CHMITE	RC07GF303J
R97	000101	RES	CARBON	100	OHM	5%	1/4 W	CHMITE	RC07GF101J
R98	000163	RES	CARBON	16	K	5%	1/4 W	CHMITE	RC07GF163J
R99	000303	RES	CARBON	30	K	5%	1/4 W	CHMITE	RC07GF303J
W01	600245	JUMPER						GETTIG	L-2007-1

PARTS LIST

ASSEMBLY 403472 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION							
CR01	211083	DIODE SILICO		018				DANA	211083
CR02	211083	DIODE SILICO		018				DANA	211083
CR03	210035	DIODE		HP5082				HP	HP5082-2810
CR04	210035	DIODE		HP5082				HP	HP5082-2810
CR06	211083	DIODE SILICO		018				DANA	211083
CR07	211083	DIODE SILICO		018				DANA	211083
CR08	211083	DIODE SILICO		018				DANA	211083
CR09	220007	DIODE SILICO	ZENER	1N751				MOTOROLA	1N751
CR10	211083	DIODE SILICO		018				DANA	211083
CR11	211083	DIODE SILICO		018				DANA	211083
CR12	211083	DIODE SILICO		018				DANA	211083
C01	130116	CAP MICA	4000	PFD	500	V	2%	ELMENCO	DM19
C02	120275	CAP POLY	1000	PFD	630	V	2.5%	NPC	KSO Series
C03	130115	CAP MICA	346	PFD	500	V	2%	ELMENCO	DM15
C04	120274	CAP POLY	87	PFD	630	V	2.5%	NPC	KSO Series
C05	100074	CAP	5	PFD	1	KV		SPRAGUE	10TCCV50
C06	100075	CAP CERAM	10	PFD	1	KV	2%	SPRAGUE	10TCCQ10
C07	130124	CAP CERAM	10	PFD	250	V		S-T	R-TR1K0-122-09SD
C08	100076	CAP	20	PFD	1	KV		SPRAGUE	10TCCQ20
C09	130123	CAP CERAM	3	PFD	250	V		S-T	R-TR1K0-122-09SD
C10	100050	CAP						SPRAGUE	10TCC-V22
C11	100061	CAP DISC	39	PFD	1000	V	5%	SPRAGUE	10TCC-Q39
C12	100077	CAP	7.5	PFD	500	V	5%	VITRAMON	VY10CA7R5JA
C13	100075	CAP CERAM	10	PFD	1	KV		SPRAGUE	10TCCQ10
C14	100075	CAP CERAM	10	PFD	1	KV		SPRAGUE	10TCCQ10
C15	100077	CAP	7.5	PFD	500	V	5%	VITRAMON	VY10CA7R5JA
C16	130125	CAP	10	PFD	250	V		JOHANSON	JMC2951
C17	130125	CAP	10	PFD	250	V		JOHANSON	JMC2951
C18	120090	CAP MYLAR	.22	MFD	600	V	20%	IMB	ZA1101
C19	110126	CAP TANTA	6.8	MFD	35	V		ITT	4312 17168
C20	130127	CAP	40	PFD				S-T	10S-TR1K0-24N750
C23	110126	CAP TANTA	6.8	MFD	35	V		ITT	4312 17168
C25	110140	CAP TANTA	47	MFD	6.3	V		ITT	4-3212-12247

PARTS LIST

ASSEMBLY 403472 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
C26	110126	CAP	TANTA	6.8 MFD	35 V		ITT	4312 17168
C27	100017	CAP	CERAM	.01 MFD	200 V	10%	SPRAGUE	TH-S10
C28	100079	CAP		3.9 PFD			SPRAGUE	10TCCV39
C29	100100	CAP	CERAM	FSV				
C31	101174	CAP	CERAM	.001 MFD	500 V	10%	AERCVOX	SCD3X5F
C32	110126	CAP	TANTA	6.8 MFD	35 V		ITT	4312 17168
C33	101174	CAP	CERAM	.001 MFD	500 V	10%	AERCVOX	SCD3X5F
K01	310078	REED RELAY, SHIELD					ELECTROL	R2690-3
K02	310077	REED RELAY, SHIELD					ELECTROL	R2691-3
K03	310078	REED RELAY, SHIELD					ELECTROL	R2690-3
L01	310068	CHOKE		1 UH			DELEVAN	1537-12
Q01	200176	TRANS					FAIRCHILD	SE3005
Q02	200161	DUAL FET					LEDEL	LS3954
Q03	200176	TRANS					FAIRCHILD	SE3005
Q04	200176	TRANS					FAIRCHILD	SE3005
Q05	200176	TRANS					FAIRCHILD	SE3005
Q06	200176	TRANS					FAIRCHILD	SE3005
Q07	200176	TRANS					FAIRCHILD	SE3005
Q08	200176	TRANS					FAIRCHILD	SE3005
R01	010721	RES		MATCHED SET			IRC	RN75
R02	010720	RES	METAL	9.09 K		.25%	IRC	RN55C
R03	040195	POT		500 OHM			BECKMAN	79PR500
R04	010721	RES		MATCHED SET			IRC	RN75
R05	040176	POT	CERMET	50 OHM			BECKMAN	79PR50
R06	010721	RES		MATCHED SET			IRC	RN75
R07	040195	POT		500 OHM			BECKMAN	79PR500
R08	010721	RES		MATCHED SET			IRC	RN75
R09	010721	RES		MATCHED SET			IRC	RN75
R10	041179	POT		5 K			SPECTROL	50-1-1-502
R11	000163	RES	CARBON	16 K	5%	1/4 W	CHMITE	RC07GF163J
R12	000202	RES	CARBON	2 K	5%	1/4 W	CHMITE	RC07GF202J
R13	000510	RES	CARBON	51 OHM	5%	1/4 W	CHMITE	RC07GF510J
R14	000241	RES	CARBON	240 OHM	5%	1/4 W	CHMITE	RC07GF241J
R15	000202	RES	CARBON	2 K	5%	1/4 W	CHMITE	RC07GF202J
R16	010718	RES		237 OHM	1%		IRC	RN55D

PARTS LIST

ASSEMBLY 403472 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION							
R17	000822	RES	CARBON	8.2 K	5%	1/4 W		CHMITE	RC07GF822J
R18	000241	RES	CARBON	240 OHM	5%	1/4 W		CHMITE	RC07GF241J
R19	010719	RES		16.2 K	1%			IRC	RN55D
R20	010718	RES		237 OHM	1%			IRC	RN55D
R21	000510	RES	CARBON	51 OHM	5%	1/4 W		CHMITE	RC07GF510J
R22	000101	RES	CARBON	100 OHM	5%	1/4 W		CHMITE	RC07GF101J
R23	000183	RES	CARBON	18 K	5%	1/4 W		CHMITE	RC07GF183J
R24	000183	RES	CARBON	18 K	5%	1/4 W		CHMITE	RC07GF183J
R25	000102	RES	CARBON	1 K	5%	1/4 W		CHMITE	RC07GF102J
R26	000183	RES	CARBON	18 K	5%	1/4 W		CHMITE	RC07GF183J
R27	000432	RES	CARBON	4.3 K	5%	1/4 W		CHMITE	RC07GF432J
R28	000510	RES	CARBON	51 OHM	5%	1/4 W		CHMITE	RC07GF510J
R29	000160	RES	CARBON	16 OHM	5%	1/4 W		CHMITE	RC07GF160J
R31	001469	RES	CARBON	1.2 K	5%	1/2 W		CHMITE	RC20GF122J
R32	000474	RES	CARBON	470 K	5%	1/4 W		CHMITE	RC07GF474J
CR13	220012	DIODE SLCO ZENER 1N958B						MOTOROLA	1N958B
C34	110140	CAP	TANTA	47 MFD	6.3 V			ITT	43212-12247
C35	110140	CAP	TANTA	47 MFD	6.3 V			ITT	43212-12247
C36	110140	CAP	TANTA	47 MFD	6.3 V			ITT	43212-12247
C37	110141	CAP		22 MFD	16 V			ITT	43212-14222
C38	100012	CAP	CERAM	33 PFD	500 V		10%	AEROVOX	TCD-N750

PARTS LIST

ASSEMBLY 403436 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION					
CR01	211083	DIODE SILICO	018			DANA	211083
CR02	211083	DIODE SILICO	018			DANA	211083
CR03	211083	DIODE SILICO	018			DANA	211083
CR04	211083	DIODE SILICO	018			DANA	211083
CR05	211083	DIODE SILICO	018			DANA	211083
CR06	211083	DIODE SILICO	018			DANA	211083
CR07	211083	DIODE SILICO	018			DANA	211083
CR08	211083	DIODE SILICO	018			DANA	211083
CR09	211083	DIODE SILICO	018			DANA	211083
C01	101099	CAP CERAM	680 PFD 500 V	10%		AERCVCX	SCD2X5F
C02	110149	CAP TANTA	.39 MFD 50 V	10%		KEMET	KR39W50K
C03	110148	CAP TANTA	.22 MFD 50 V	10%		KEMET	KR22W50K
C04	110147	CAP TANTA	.18 MFD 50 V	10%		KEMET	KR18W50K
C05	121468	CAP MYLAR	.022 MFD 100 V	10%		CDE	WMF1S22
C06	100017	CAP CERAM	.01 MFD 200 V	10%		SPRAGUE	TH-S10
C07	100017	CAP CERAM	.01 MFD 200 V	10%		SPRAGUE	TH-S10
J03	920460	INTEGRATED CIRCUIT				AUGAT	314AG5D-2R
J04	920463	FUSE CLIP				AUGAT	600832AT
M01	230029	INTEGRATED CIRCUIT				TI	SN7401N
M02	230029	INTEGRATED CIRCUIT				TI	SN7401N
M03	230029	INTEGRATED CIRCUIT				TI	SN7401N
M04	230064	INTEGRATED CIRCUIT				TI	SN7404N
M05	230064	INTEGRATED CIRCUIT				TI	SN7404N
M06	230073	INTEGRATED CIRCUIT				LIBERTY	SN7405N
M07	230028	INTEGRATED CIRCUIT				TI	SN7400N
M08	230032	INTEGRATED CIRCUIT				TI	SN7420N
M09	230030	INTEGRATED CIRCUIT				TI	SN7402N
M10	230029	INTEGRATED CIRCUIT				TI	SN7401N
Q01	200037	TRANS SILICO NPN	2N3646			FAIRCHILD	2N3646
Q02	200136	TRANS				FAIRCHILD	SE4022
Q03	200136	TRANS				FAIRCHILD	SE4022
Q04	200136	TRANS				FAIRCHILD	SE4022
Q05	200136	TRANS				FAIRCHILD	SE4022
Q06	200136	TRANS				FAIRCHILD	SE4022
Q07	200088	TRANS SILICO PNP	2N4248			FAIRCHILD	2N4248

PARTS LIST

ASSEMBLY 403436 - Model 4800 A

REF. DESIG.	PART NO.	DESCRIPTION							
Q08	200037	TRANS	SILICO NPN		2N3646			FAIRCHILD	2N3646
R01	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R02	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R03	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R04	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R05	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R06	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R07	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R08	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R09	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R10	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R11	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R12	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R13	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R14	000512	RES	CARBON	5.1	K	5%	1/4 W	OHMITE	RC07GF512J
R15	000102	RES	CARBON	1	K	5%	1/4 W	OHMITE	RC07GF102J
R16	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R17	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R18	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R19	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R20	000202	RES	CARBON	2	K	5%	1/4 W	OHMITE	RC07GF202J
R21	000392	RES	CARBON	0003.9	K	5%	1/4 W	OHMITE	RC07GF392J
R22	000432	RES	CARBON	4.3	K	5%	1/4 W	OHMITE	RC07GF432J
R23	000432	RES	CARBON	4.3	K	5%	1/4 W	OHMITE	RC07GF432J
R24	000101	RES	CARBON	100	OHM	5%	1/4 W	OHMITE	RC07GF101J
R25	000105	RES	CARBON	1	M	5%	1/4 W	OHMITE	RC07GF105J
R26	010676	RES	METAL	15	K	1%		IRC	RN55C
R27	010529	RES		10	K	1%		IRC	RN55D
R28	000105	RES	CARBON	1	M	5%	1/4 W	OHMITE	RC07GF105J
R29	010697	RES	METAL	26.7	K	1%		IRC	RN55D
R30	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R31	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J
R32	000242	RES	CARBON	2.4	K	5%	1/4 W	OHMITE	RC07GF242J
R33	000432	RES	CARBON	4.3	K	5%	1/4 W	OHMITE	RC07GF432J
R34	000103	RES	CARBON	10	K	5%	1/4 W	OHMITE	RC07GF103J

PARTS LIST

ASSEMBLY 403436 - Model 4800

A

REF. DESIG.	PART NO.	DESCRIPTION						
R35	000103	RES	CARBON	10 K	5%	1/4 W	CHMITE	RC07GF103J
R36	000123	RES	CARBON	12 K	5%	1/4 W	CHMITE	RC07GF123J

DANA™

www.manualsplus.com
1005292